

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P755899

Luminaire Tested: LD4D90BD010-EU4DR6570959030-4LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P755899
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D90BD010-EU4DR6570959030-4LBCSSQMW
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7704.5 lumens
Efficiency: N/A
Efficacy: 77.9 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 98.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P755899

CATALOG NUMBER: LD4D90BD010-EU4DR6570959030-4LBCSSQMW

Luminous Intensity Polar Plot

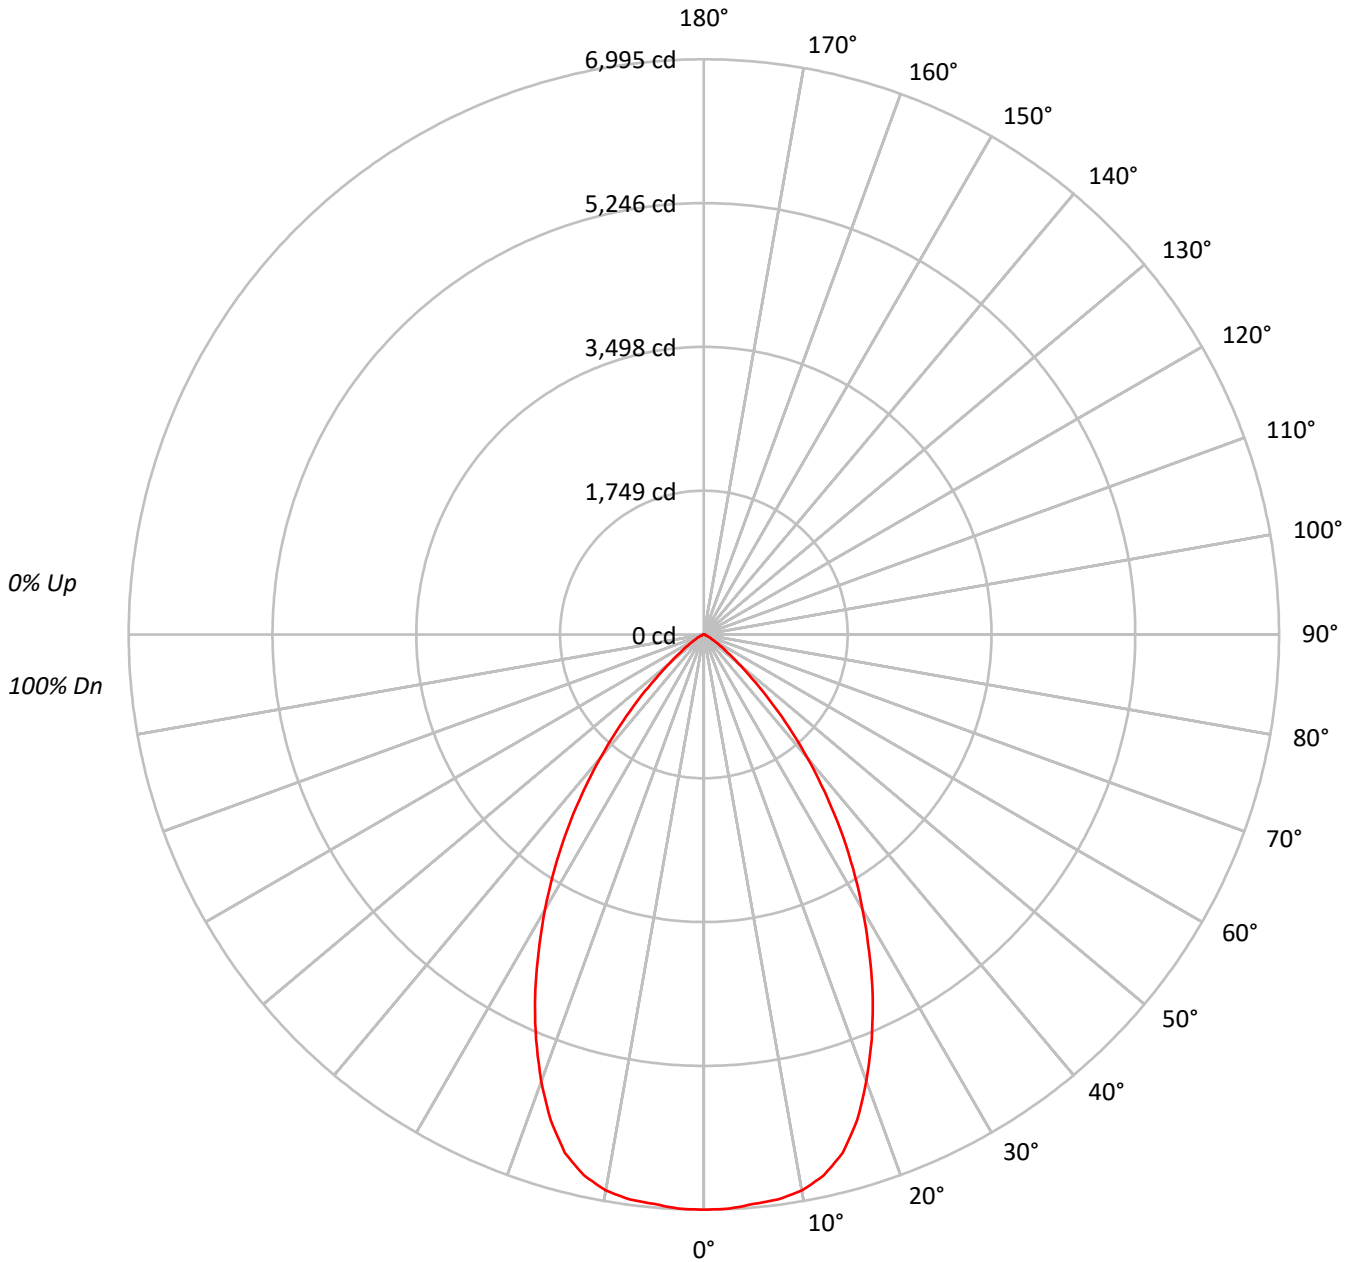



TEST NUMBER: P755899

CATALOG NUMBER: LD4D90BD010-EU4DR6570959030-4LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	408558
5°	407528
10°	407181
15°	394631
20°	359264
25°	313076
30°	260389
35°	206322
40°	148914
45°	94076
50°	49037
55°	26067
60°	13690
65°	7532
70°	3159
75°	3475
80°	2422
85°	2077

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 94076 cd/sqm



TEST NUMBER: P755899

CATALOG NUMBER: LD4D90BD010-EU4DR6570959030-4LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	661.5	8.6
10°-20°	1811.6	23.5
20°-30°	2214.4	28.7
30°-40°	1796.7	23.3
40°-50°	895.3	11.6
50°-60°	249.7	3.2
60°-70°	56.8	0.7
70°-80°	14.8	0.2
80°-90°	3.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4687.5	60.8
0°-40°	6484.2	84.2
0°-60°	7629.2	99.0
0°-90°	7704.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7704.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6995	
5°	6951	662
15°	6527	1812
25°	4858	2214
35°	2894	1797
45°	1139	895
55°	256	250
65°	54	57
75°	15	15
85°	3	4
90°	0	



TEST NUMBER: P755899

CATALOG NUMBER: LD4D90BD010-EU4DR6570959030-4LBCSSQMW

CANDELA DISTRIBUTION (FULL):

	0°
0°	6995.4
2.5°	6990.3
5°	6951.2
7.5°	6928.6
10°	6865.9
12.5°	6738.4
15°	6526.7
17.5°	6195.7
20°	5780.4
22.5°	5332.2
25°	4858.3
27.5°	4351.5
30°	3861.1
32.5°	3376.9
35°	2893.8
37.5°	2411.7
40°	1953.2
42.5°	1523.5
45°	1139.0
47.5°	793.6
50°	539.7
52.5°	372.1
55°	256.0
57.5°	172.7
60°	117.2
62.5°	81.2
65°	54.5
67.5°	27.8
70°	18.5
72.5°	17.5
75°	15.4
77.5°	10.3
80°	7.2
82.5°	5.1
85°	3.1
87.5°	2.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)