

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P755366

Luminaire Tested: LD4D90BD010-EU4DR3070959035-4LBCSSQMW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P755366
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D90BD010-EU4DR3070959035-4LBCSSQMW
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7746.6 lumens
Efficiency: N/A
Efficacy: 78.3 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct


Input Watts (W): 98.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P755366

CATALOG NUMBER: LD4D90BD010-EU4DR3070959035-4LBCSSQMW

Luminous Intensity Polar Plot

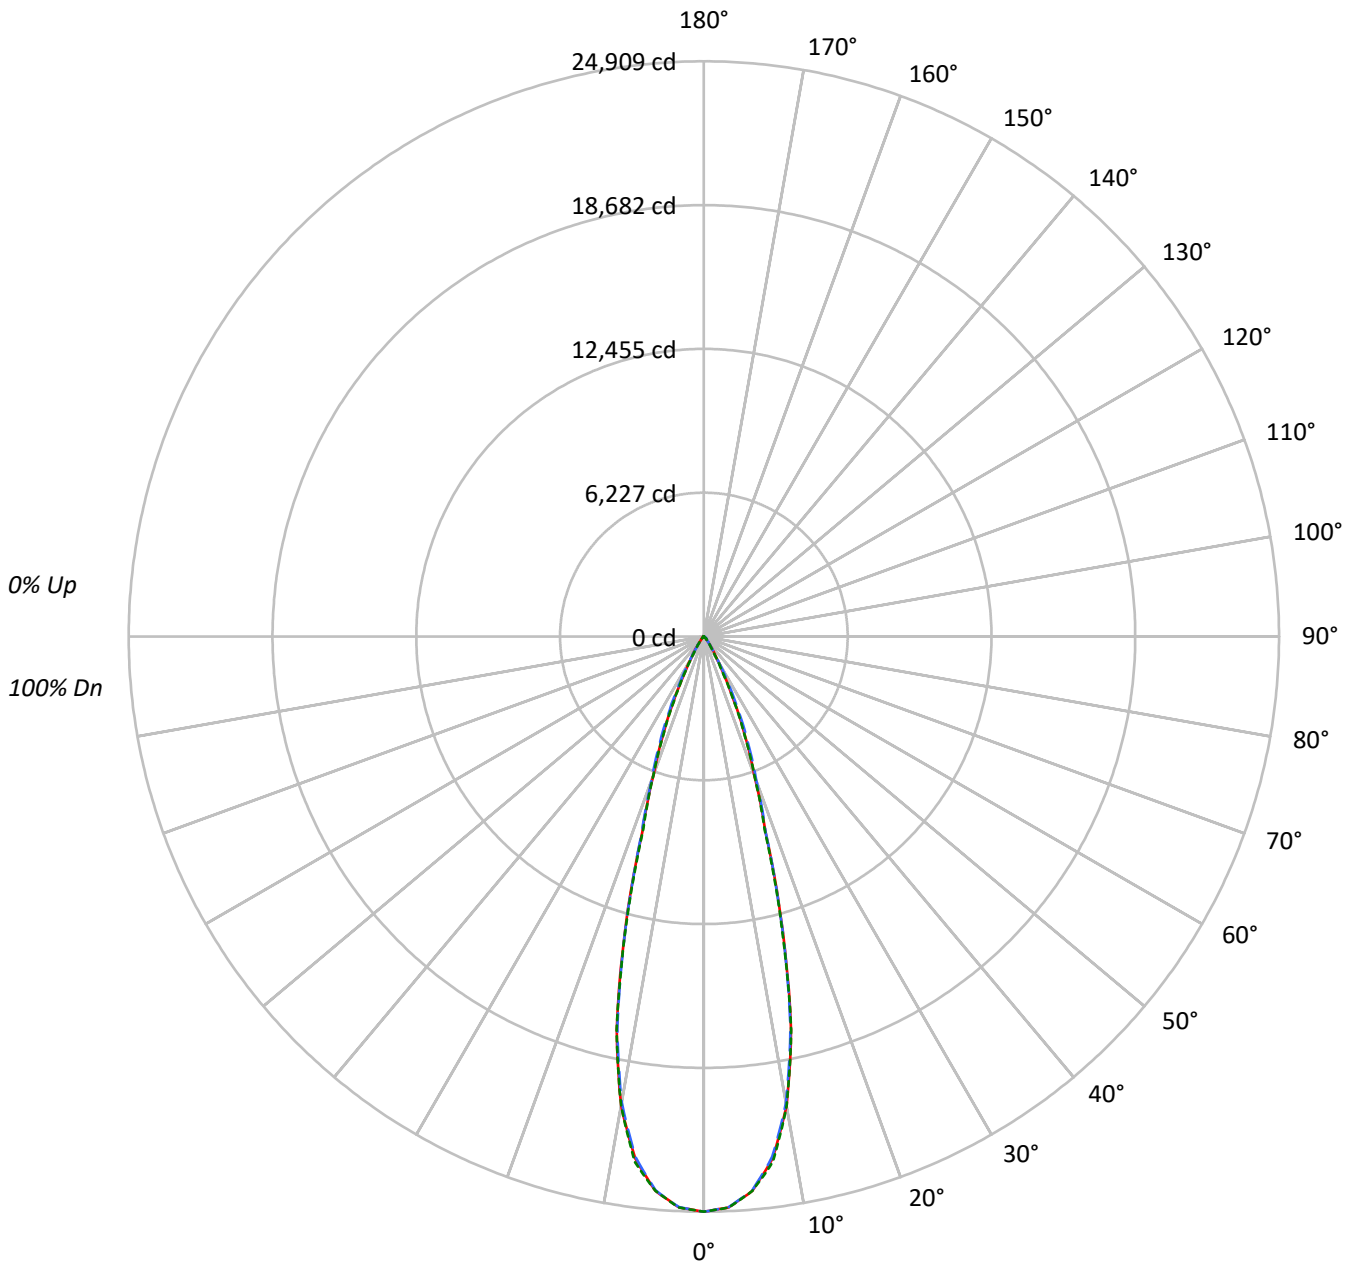



TEST NUMBER: P755366

CATALOG NUMBER: LD4D90BD010-EU4DR3070959035-4LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1906627	1906627	1906627
5°	1851896	1849729	1851988
10°	1604018	1592709	1603637
15°	1046546	1040920	1035689
20°	520397	539921	519696
25°	262144	295605	256772
30°	104957	114361	91443
35°	48683	46628	39078
40°	21013	23341	19794
45°	14830	18402	14960
50°	5097	13397	5382
55°	2936	5551	3096
60°	2067	2434	2067
65°	1322	1322	1322
70°	828	537	828
75°	0	355	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 18402 cd/sqm



TEST NUMBER: P755366

CATALOG NUMBER: LD4D90BD010-EU4DR3070959035-4LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2190.4	28.3
10°-20°	3527.6	45.5
20°-30°	1524.4	19.7
30°-40°	347.4	4.5
40°-50°	119.3	1.5
50°-60°	29.1	0.4
60°-70°	7.5	0.1
70°-80°	0.8	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7242.4	93.5
0°-40°	7589.8	98.0
0°-60°	7738.2	99.9
0°-90°	7746.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7746.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	24909	24909	24909	24909	24909	
5°	24102	24079	24074	24124	24103	2192
15°	13207	13048	13136	13093	13070	3536
25°	3104	3221	3500	3139	3040	1486
35°	521	532	499	495	418	353
45°	137	170	170	170	138	97
55°	22	23	42	24	23	21
65°	7	7	7	7	7	7
75°	0	0	1	0	0	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P755366

CATALOG NUMBER: LD4D90BD010-EU4DR3070959035-4LBCSSQMW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	24909.1	24909.1	24909.1	24909.1	24909.1
2.5°	24744.0	24726.9	24736.7	24748.9	24753.8
5°	24102.0	24078.7	24073.8	24124.0	24103.2
7.5°	22806.8	22773.8	22723.7	22837.4	22943.8
10°	20637.3	20600.6	20491.8	20545.6	20632.4
12.5°	17434.4	17315.8	17313.3	17484.6	17461.3
15°	13206.7	13047.7	13135.7	13092.9	13069.7
17.5°	8881.1	8819.9	8937.3	8901.9	8749.0
20°	6388.7	6404.6	6628.4	6515.9	6380.1
22.5°	4661.9	4719.4	4984.8	4694.9	4588.5
25°	3103.9	3221.3	3500.1	3139.3	3040.3
27.5°	1909.0	1962.8	2245.3	1884.6	1830.8
30°	1187.5	1160.6	1293.9	1110.4	1034.6
32.5°	779.0	744.8	787.6	706.9	645.7
35°	521.0	532.0	499.0	495.3	418.2
37.5°	325.3	374.2	330.2	352.2	269.0
40°	210.3	271.5	233.6	258.0	198.1
42.5°	172.4	209.1	192.0	204.2	176.1
45°	137.0	170.0	170.0	170.0	138.2
47.5°	75.8	113.7	145.5	116.2	80.7
50°	42.8	57.5	112.5	59.9	45.2
52.5°	29.4	33.0	77.0	34.2	30.6
55°	22.0	23.2	41.6	24.5	23.2
57.5°	17.1	18.3	22.0	18.3	17.1
60°	13.5	13.5	15.9	14.7	13.5
62.5°	9.8	9.8	11.0	9.8	9.8
65°	7.3	7.3	7.3	7.3	7.3
67.5°	3.7	4.9	4.9	4.9	4.9
70°	3.7	2.4	2.4	2.4	3.7
72.5°	2.4	1.2	1.2	1.2	1.2
75°	0.0	0.0	1.2	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)