

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P756146

Luminaire Tested: LD4D95BD010-EU4DR3070959035-4LBCSSQMW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P756146
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D95BD010-EU4DR3070959035-4LBCSSQMW
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7934.6 lumens
Efficiency: N/A
Efficacy: 80.0 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct


Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P756146

CATALOG NUMBER: LD4D95BD010-EU4DR3070959035-4LBCSSQMW

Luminous Intensity Polar Plot

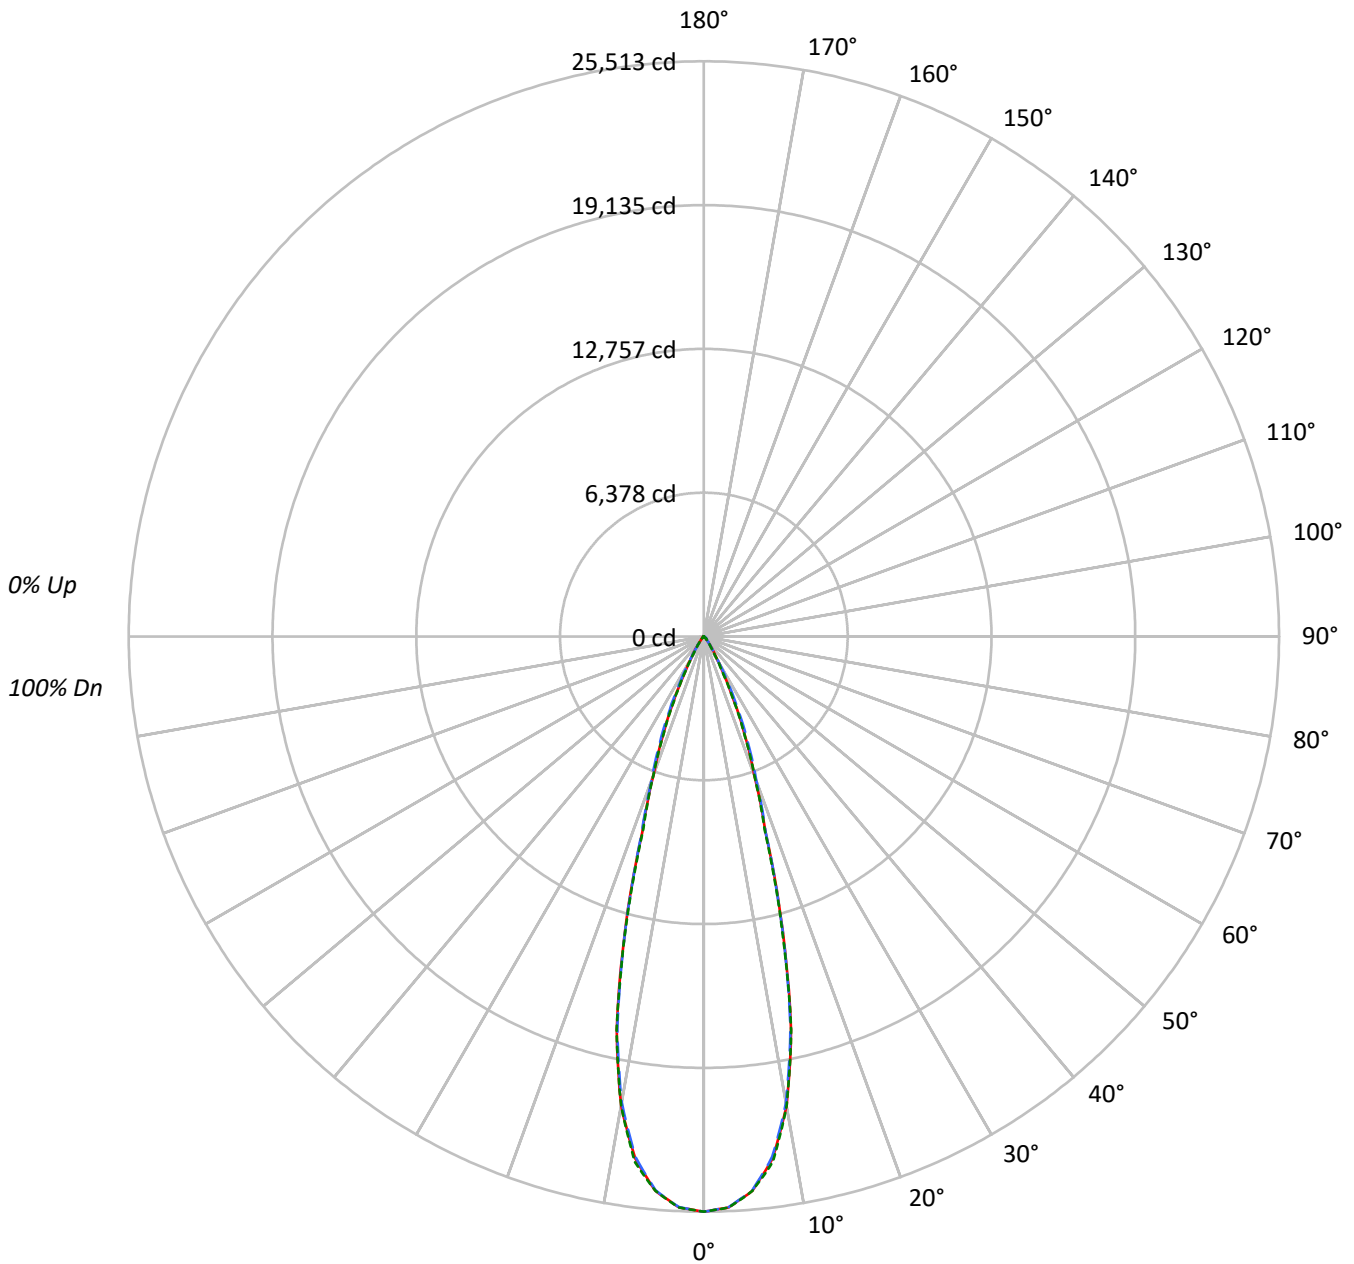



TEST NUMBER: P756146

CATALOG NUMBER: LD4D95BD010-EU4DR3070959035-4LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1952882	1952882	1952882
5°	1896814	1894601	1896914
10°	1642934	1631345	1642546
15°	1071928	1066174	1060818
20°	533022	553020	532305
25°	268503	302776	262997
30°	107502	117136	93661
35°	49861	47758	40031
40°	21533	23911	20274
45°	15187	18846	15317
50°	5216	13718	5513
55°	3003	5685	3176
60°	2113	2495	2113
65°	1358	1358	1358
70°	850	559	850
75°	0	384	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 18846 cd/sqm



TEST NUMBER: P756146

CATALOG NUMBER: LD4D95BD010-EU4DR3070959035-4LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2243.5	28.3
10°-20°	3613.2	45.5
20°-30°	1561.4	19.7
30°-40°	355.9	4.5
40°-50°	122.2	1.5
50°-60°	29.8	0.4
60°-70°	7.7	0.1
70°-80°	0.8	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7418.1	93.5
0°-40°	7773.9	98.0
0°-60°	7926.0	99.9
0°-90°	7934.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7934.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	25513	25513	25513	25513	25513	
5°	24687	24663	24658	24709	24688	2245
15°	13527	13364	13454	13411	13387	3622
25°	3179	3299	3585	3216	3114	1522
35°	534	545	511	507	428	362
45°	140	174	174	174	142	100
55°	22	24	43	25	24	22
65°	8	8	8	8	8	7
75°	0	0	1	0	0	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P756146

CATALOG NUMBER: LD4D95BD010-EU4DR3070959035-4LBCSSQMW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	25513.4	25513.4	25513.4	25513.4	25513.4
2.5°	25344.3	25326.7	25336.8	25349.3	25354.3
5°	24686.6	24662.8	24657.8	24709.2	24687.9
7.5°	23360.1	23326.3	23274.9	23391.4	23500.4
10°	21138.0	21100.4	20988.9	21044.0	21133.0
12.5°	17857.4	17735.9	17733.3	17908.7	17884.9
15°	13527.0	13364.2	13454.4	13410.6	13386.8
17.5°	9096.5	9033.9	9154.2	9117.8	8961.2
20°	6543.7	6560.0	6789.2	6674.0	6534.9
22.5°	4775.0	4833.9	5105.7	4808.8	4699.8
25°	3179.2	3299.4	3585.0	3215.5	3114.0
27.5°	1955.3	2010.5	2299.8	1930.3	1875.2
30°	1216.3	1188.7	1325.3	1137.4	1059.7
32.5°	797.9	762.8	806.7	724.0	661.4
35°	533.6	544.9	511.1	507.3	428.4
37.5°	333.2	383.3	338.2	360.8	275.6
40°	215.5	278.1	239.3	264.3	202.9
42.5°	176.6	214.2	196.7	209.2	180.4
45°	140.3	174.1	174.1	174.1	141.5
47.5°	77.7	116.5	149.1	119.0	82.7
50°	43.8	58.9	115.2	61.4	46.3
52.5°	30.1	33.8	78.9	35.1	31.3
55°	22.5	23.8	42.6	25.1	23.8
57.5°	17.5	18.8	22.5	18.8	17.5
60°	13.8	13.8	16.3	15.0	13.8
62.5°	10.0	10.0	11.3	10.0	10.0
65°	7.5	7.5	7.5	7.5	7.5
67.5°	3.8	5.0	5.0	5.0	5.0
70°	3.8	2.5	2.5	2.5	3.8
72.5°	2.5	1.3	1.3	1.3	1.3
75°	0.0	0.0	1.3	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)