

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P756172

Luminaire Tested: LD4D95BD010-EU4DR3070959050-4LBCSSQMW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P756172  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D95BD010-EU4DR3070959050-4LBCSSQMW  
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8364.8 lumens  
Efficiency: N/A  
Efficacy: 84.3 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct


Input Watts (W): 99.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P756172

CATALOG NUMBER: LD4D95BD010-EU4DR3070959050-4LBCSSQMW

### Luminous Intensity Polar Plot

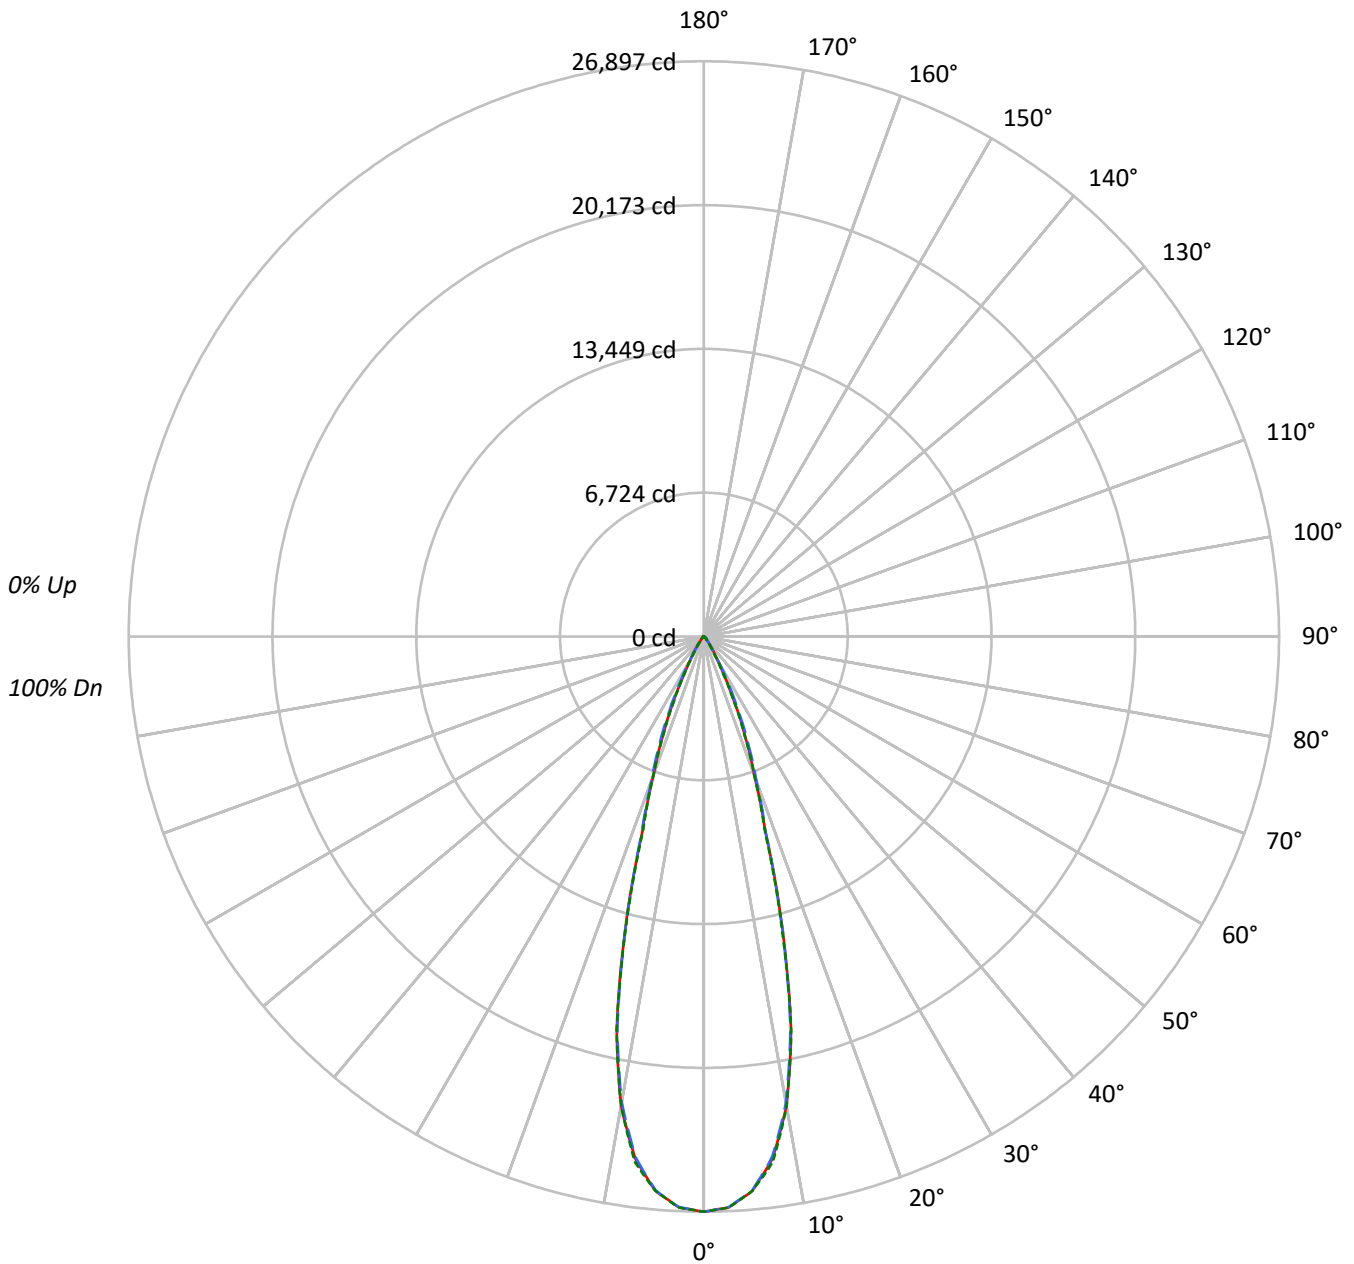



TEST NUMBER: P756172

CATALOG NUMBER: LD4D95BD010-EU4DR3070959050-4LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2058780	2058780	2058780
5°	1999682	1997346	1999782
10°	1732029	1719811	1731617
15°	1130061	1123991	1118341
20°	561923	583012	561173
25°	283064	319194	277262
30°	113336	123482	98743
35°	52571	50347	42199
40°	22692	25200	21373
45°	16010	19874	16151
50°	5502	14468	5823
55°	3176	5992	3350
60°	2220	2633	2220
65°	1431	1431	1431
70°	895	582	895
75°	0	384	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 19874 cd/sqm



TEST NUMBER: P756172

CATALOG NUMBER: LD4D95BD010-EU4DR3070959050-4LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	2365.2	28.3
10°-20°	3809.1	45.5
20°-30°	1646.0	19.7
30°-40°	375.2	4.5
40°-50°	128.8	1.5
50°-60°	31.5	0.4
60°-70°	8.2	0.1
70°-80°	0.9	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7820.4	93.5
0°-40°	8195.5	98.0
0°-60°	8355.8	99.9
0°-90°	8364.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8364.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	26897	26897	26897	26897	26897	
5°	26025	26000	25995	26049	26027	2367
15°	14261	14089	14184	14138	14113	3818
25°	3352	3478	3779	3390	3283	1604
35°	563	574	539	535	452	382
45°	148	184	184	184	149	105
55°	24	25	45	26	25	23
65°	8	8	8	8	8	8
75°	0	0	1	0	0	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P756172

CATALOG NUMBER: LD4D95BD010-EU4DR3070959050-4LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	26896.9	26896.9	26896.9	26896.9	26896.9
2.5°	26718.7	26700.2	26710.7	26723.9	26729.2
5°	26025.4	26000.3	25995.0	26049.1	26026.7
7.5°	24626.9	24591.3	24537.1	24659.9	24774.8
10°	22284.3	22244.6	22127.1	22185.2	22279.0
12.5°	18825.7	18697.6	18695.0	18879.9	18854.8
15°	14260.6	14088.9	14184.0	14137.8	14112.7
17.5°	9589.8	9523.8	9650.6	9612.3	9447.2
20°	6898.5	6915.7	7157.4	7035.9	6889.3
22.5°	5033.9	5096.0	5382.6	5069.6	4954.7
25°	3351.6	3478.3	3779.4	3389.8	3282.9
27.5°	2061.4	2119.5	2424.5	2035.0	1976.9
30°	1282.3	1253.2	1397.1	1199.1	1117.2
32.5°	841.2	804.2	850.4	763.3	697.2
35°	562.6	574.4	538.8	534.8	451.6
37.5°	351.3	404.1	356.5	380.3	290.5
40°	227.1	293.2	252.2	278.6	213.9
42.5°	186.2	225.8	207.3	220.5	190.2
45°	147.9	183.6	183.6	183.6	149.2
47.5°	81.9	122.8	157.1	125.5	87.2
50°	46.2	62.1	121.5	64.7	48.9
52.5°	31.7	35.7	83.2	37.0	33.0
55°	23.8	25.1	44.9	26.4	25.1
57.5°	18.5	19.8	23.8	19.8	18.5
60°	14.5	14.5	17.2	15.8	14.5
62.5°	10.6	10.6	11.9	10.6	10.6
65°	7.9	7.9	7.9	7.9	7.9
67.5°	4.0	5.3	5.3	5.3	5.3
70°	4.0	2.6	2.6	2.6	4.0
72.5°	2.6	1.3	1.3	1.3	1.3
75°	0.0	0.0	1.3	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)