

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207538

Luminaire Tested: **LD4B10D010 EU4B10208027 4LBMMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P207538  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD4B10D010 EU4B10208027 4LBMMW1  
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W  
DL3-11.1W DLE-11.39W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 803.9 lumens  
Efficiency: N/A  
Efficacy: 81.2 lumens/watt  
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P207538

CATALOG NUMBER: LD4B10D010 EU4B10208027 4LBMMW1

### Luminous Intensity Polar Plot

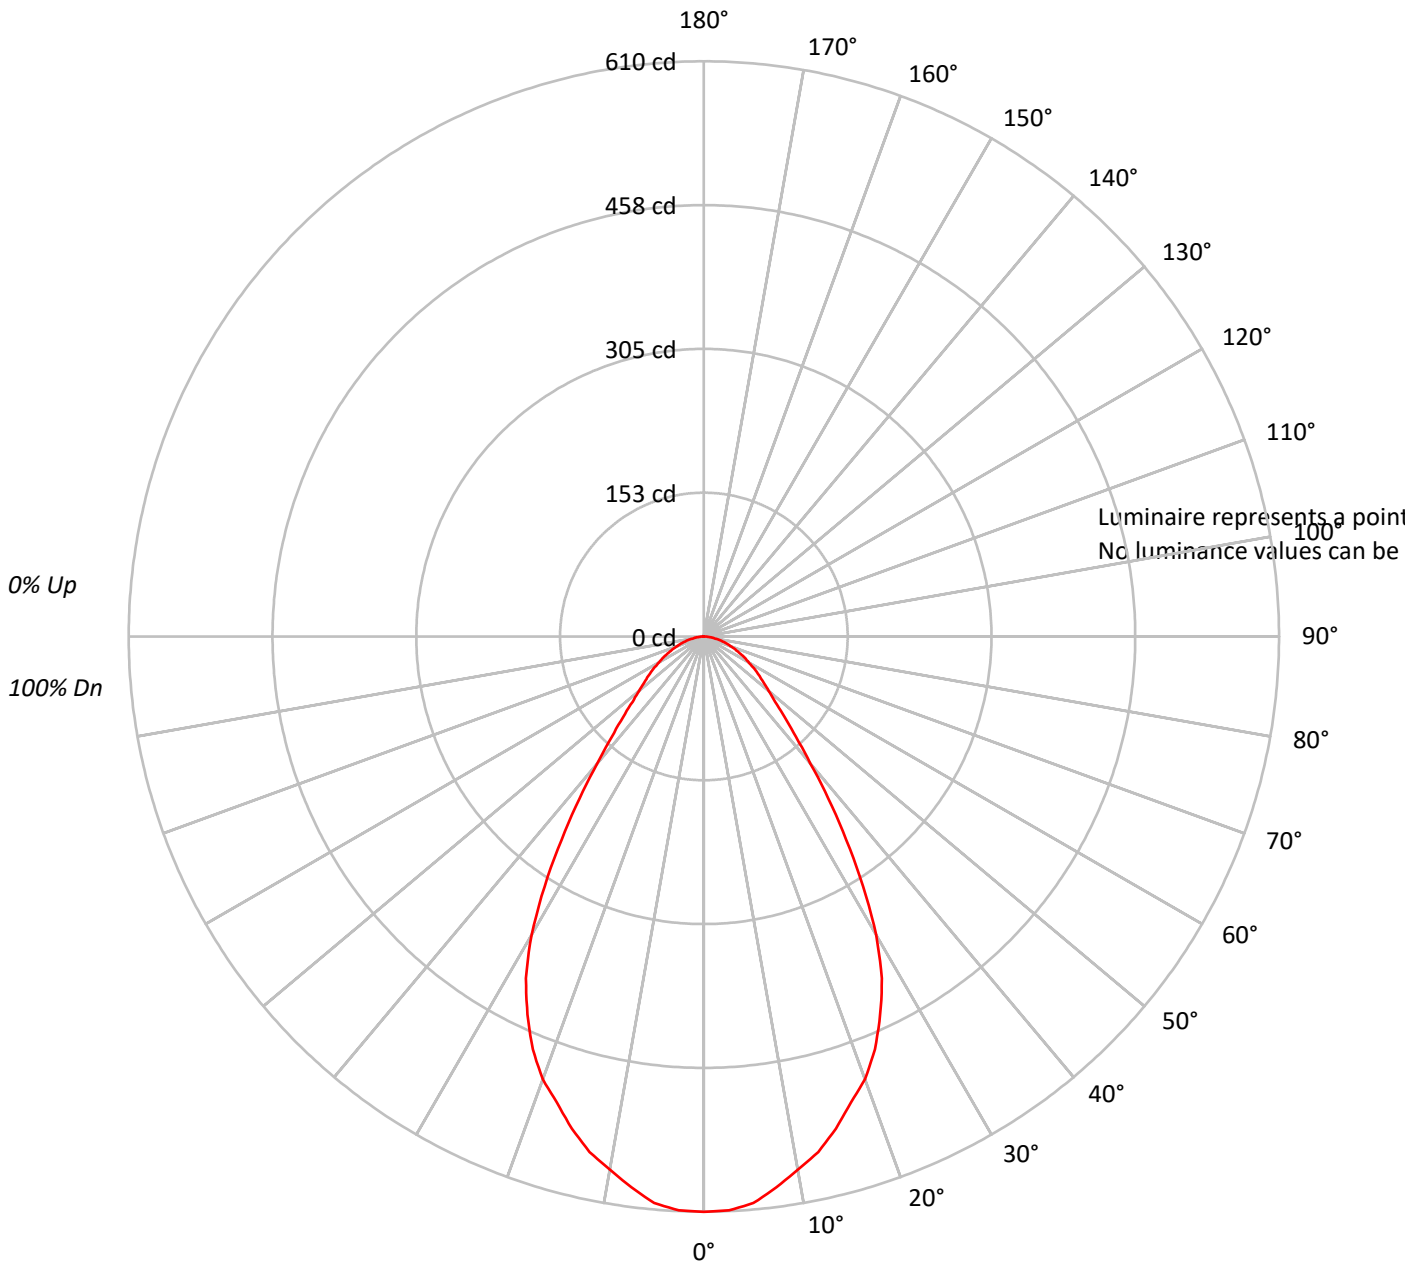



TEST NUMBER: P207538

CATALOG NUMBER: LD4B10D010 EU4B10208027 4LBMMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89			
2	104	98	92	88	102	96	91	87	93	89	85	89	86	83	87	84	81	80			
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71			
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	69	66	64			
5	85	75	67	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58			
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53			
7	75	64	57	52	74	63	56	51	62	56	51	60	55	51	59	54	50	49			
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45			
9	67	55	48	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42			
10	63	52	45	41	62	51	45	41	51	45	40	50	44	40	49	44	40	39			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P207538

CATALOG NUMBER: LD4B10D010 EU4B10208027 4LBMMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	56.6	7.0
10°-20°	151.6	18.9
20°-30°	201.6	25.1
30°-40°	164.9	20.5
40°-50°	96.0	11.9
50°-60°	63.7	7.9
60°-70°	41.9	5.2
70°-80°	22.1	2.7
80°-90°	5.4	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	409.8	51.0
0°-40°	574.7	71.5
0°-60°	734.5	91.4
0°-90°	803.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	803.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	610	
5°	603	57
15°	540	152
25°	442	202
35°	263	165
45°	121	96
55°	71	64
65°	42	42
75°	21	22
85°	5	5
90°	0	



TEST NUMBER: P207538

CATALOG NUMBER: LD4B10D010 EU4B10208027 4LBMMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	610.2
2.5°	609.1
5°	603.2
7.5°	589.3
10°	574.1
12.5°	560.1
15°	540.4
17.5°	518.2
20°	499.6
22.5°	474.0
25°	442.5
27.5°	408.8
30°	365.7
32.5°	314.4
35°	263.2
37.5°	216.6
40°	175.8
42.5°	144.4
45°	121.1
47.5°	102.5
50°	89.7
52.5°	79.2
55°	71.0
57.5°	62.9
60°	54.7
62.5°	48.9
65°	41.9
67.5°	36.1
70°	30.3
72.5°	25.6
75°	21.0
77.5°	16.3
80°	11.6
82.5°	8.2
85°	4.7
87.5°	1.2
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)