

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207548

Luminaire Tested: **LD4B10D010 EU4B10209727 4LBMMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P207548  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD4B10D010 EU4B10209727 4LBMMW1  
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W  
DL3-11.1W DLE-11.39W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 600.0 lumens  
Efficiency: N/A  
Efficacy: 60.6 lumens/watt  
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P207548

CATALOG NUMBER: LD4B10D010 EU4B10209727 4LBMMW1

### Luminous Intensity Polar Plot

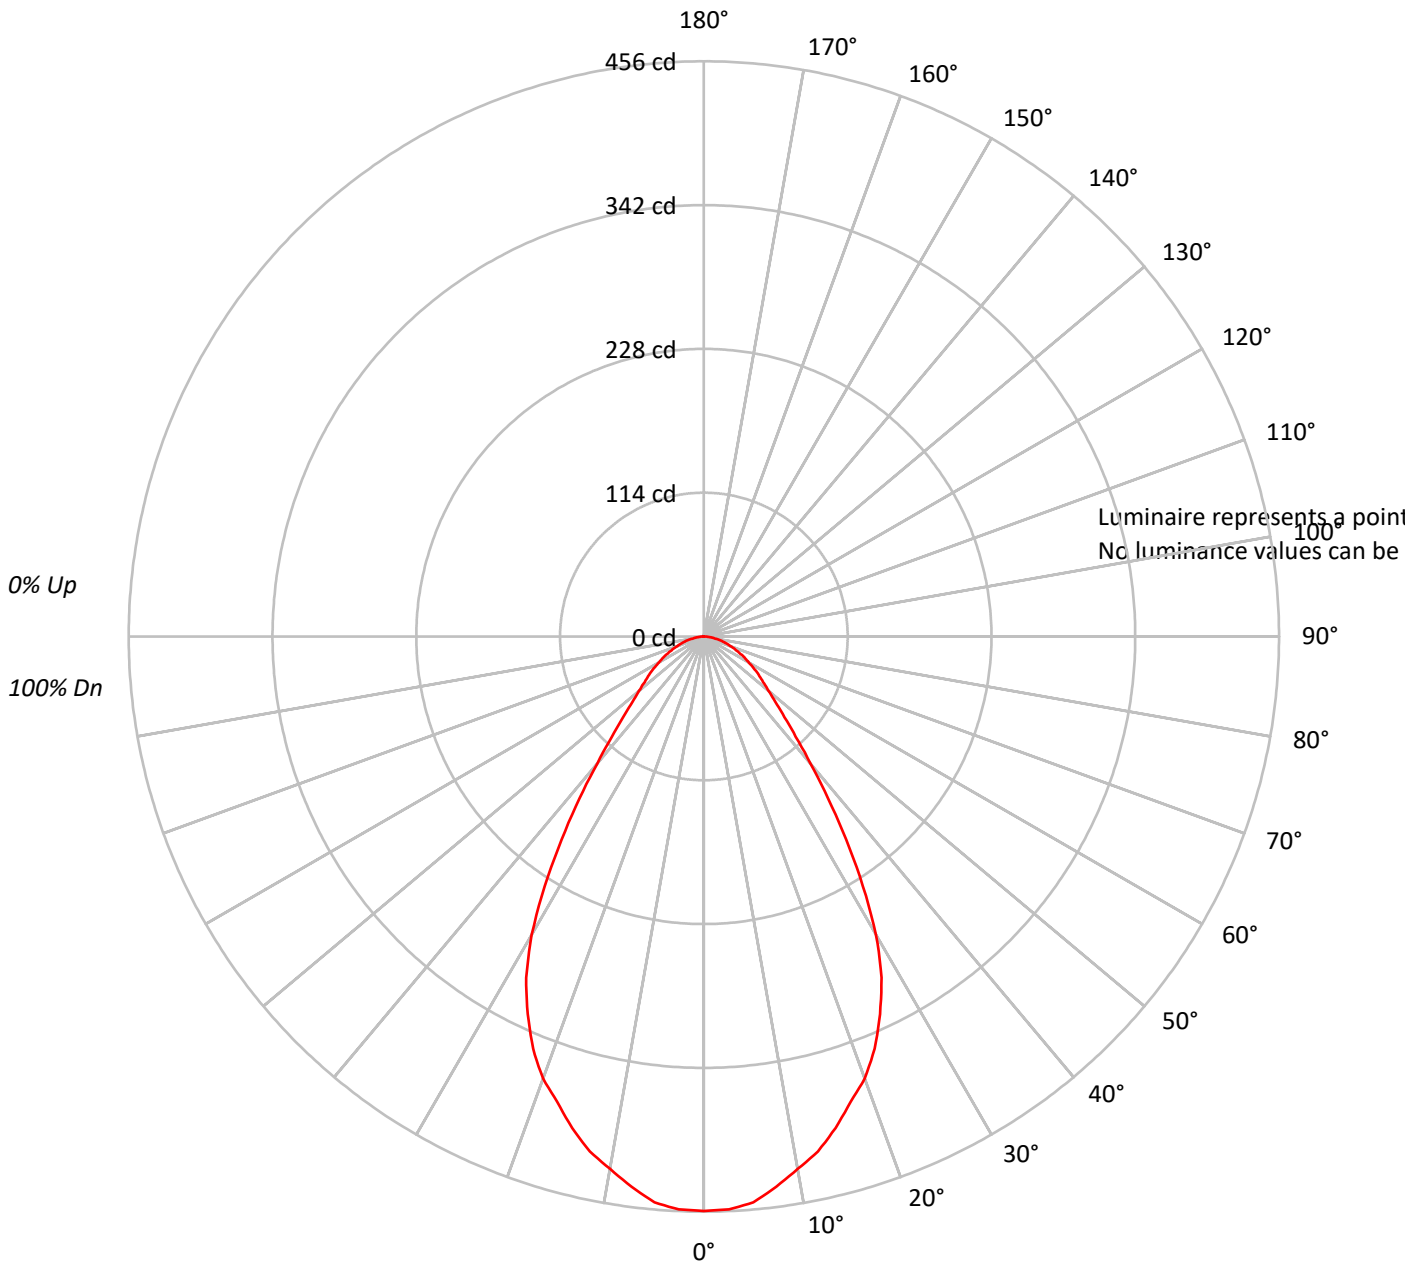



TEST NUMBER: P207548

CATALOG NUMBER: LD4B10D010 EU4B10209727 4LBMMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89			
2	104	98	92	88	102	96	91	87	93	89	85	89	86	83	87	84	81	80			
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71			
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	69	66	64			
5	85	75	67	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58			
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53			
7	75	64	57	52	74	63	56	51	62	56	51	60	55	51	59	54	50	49			
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45			
9	67	55	48	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42			
10	63	52	45	41	62	51	45	41	51	45	40	50	44	40	49	44	40	39			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P207548

CATALOG NUMBER: LD4B10D010 EU4B10209727 4LBMMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	42.2	7.0
10°-20°	113.2	18.9
20°-30°	150.5	25.1
30°-40°	123.1	20.5
40°-50°	71.7	11.9
50°-60°	47.5	7.9
60°-70°	31.3	5.2
70°-80°	16.5	2.7
80°-90°	4.0	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	305.9	51.0
0°-40°	429.0	71.5
0°-60°	548.2	91.4
0°-90°	600.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	600.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	456	
5°	450	42
15°	403	113
25°	330	150
35°	196	123
45°	90	72
55°	53	48
65°	31	31
75°	16	16
85°	4	4
90°	0	



TEST NUMBER: P207548

CATALOG NUMBER: LD4B10D010 EU4B10209727 4LBMMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	455.5
2.5°	454.6
5°	450.3
7.5°	439.9
10°	428.6
12.5°	418.1
15°	403.4
17.5°	386.8
20°	372.9
22.5°	353.8
25°	330.3
27.5°	305.1
30°	273.0
32.5°	234.7
35°	196.5
37.5°	161.7
40°	131.3
42.5°	107.8
45°	90.4
47.5°	76.5
50°	66.9
52.5°	59.1
55°	53.0
57.5°	46.9
60°	40.9
62.5°	36.5
65°	31.3
67.5°	26.9
70°	22.6
72.5°	19.1
75°	15.6
77.5°	12.2
80°	8.7
82.5°	6.1
85°	3.5
87.5°	0.9
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)