

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P251979

Luminaire Tested: **LD4B10D010 EU4B10209030 4LBBA1MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P251979
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1712-453-3)
Test Lab: INNOVATION CENTER(G1)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B10D010 EU4B10209030 4LBBA1MW
Description: PORTFOLIO 4 INCH BAFFLE RECESSED DOWNLIGHT, WITH MATTE WHITE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1098.0 lumens
Efficiency: N/A
Efficacy: 109.3 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 0.99
Luminous Opening: Circular (Dia: 0.38' x H: 0')
CIE Type: Direct


Input Watts (W): 10.05
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P251979

CATALOG NUMBER: LD4B10D010 EU4B10209030 4LBBA1MW

Luminous Intensity Polar Plot

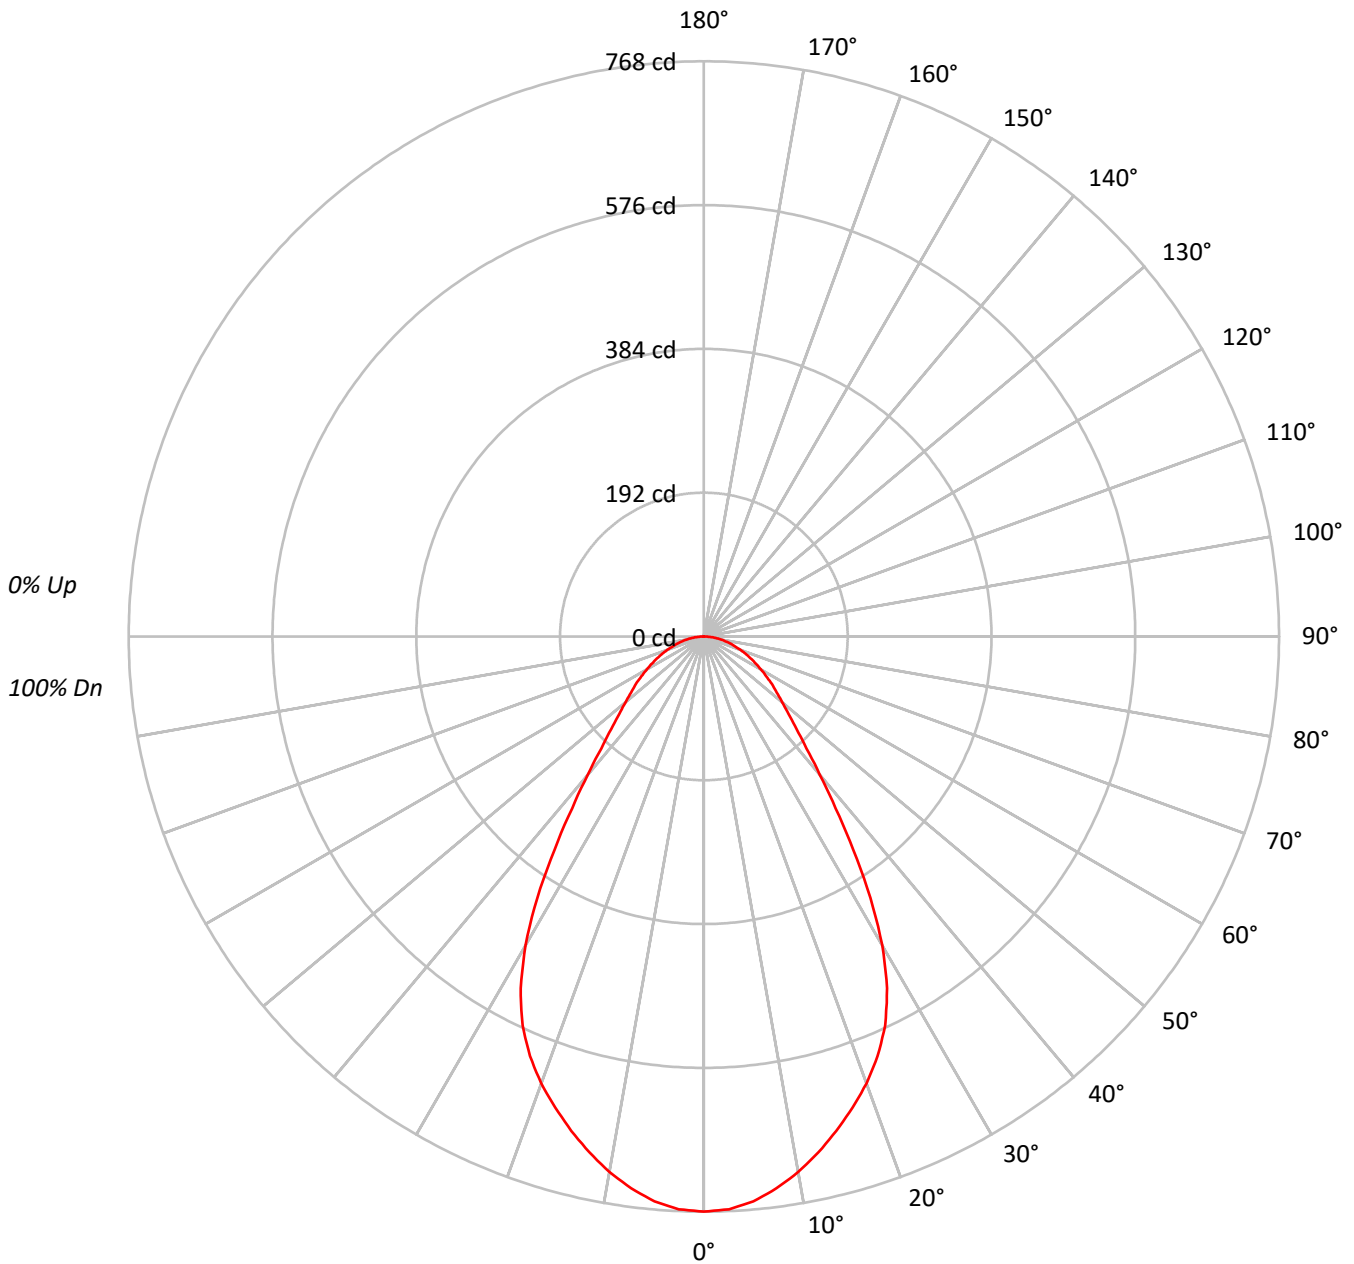



TEST NUMBER: P251979

CATALOG NUMBER: LD4B10D010 EU4B10209030 4LBBA1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88				88
2	103	96	91	86	101	95	90	85	91	87	83	88	85	82	85	82	80	78				78
3	96	87	81	75	94	86	80	75	83	78	73	80	76	72	78	74	71	69				69
4	89	80	72	67	87	78	72	66	76	70	65	74	69	65	72	67	64	62				62
5	84	73	65	60	82	72	65	59	70	64	59	68	63	58	66	62	58	56				56
6	78	67	59	54	77	66	59	54	64	58	53	63	57	53	61	56	53	51				51
7	74	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46				46
8	69	58	50	45	68	57	50	45	56	49	45	54	49	45	53	48	44	43				43
9	65	54	46	42	64	53	46	42	52	46	41	51	45	41	50	45	41	39				39
10	62	50	43	39	61	50	43	38	49	43	38	48	42	38	47	42	38	37				37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	74838
5°	74067
10°	71846
15°	68962
20°	65858
25°	61595
30°	53612
35°	41367
40°	30610
45°	24092
50°	20696
55°	18809
60°	17153
65°	15866
70°	14675
75°	13744
80°	12740
85°	12077



TEST NUMBER: P251979

CATALOG NUMBER: LD4B10D010 EU4B10209030 4LBBA1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	71.3	6.5
10°-20°	192.1	17.5
20°-30°	259.9	23.7
30°-40°	218.4	19.9
40°-50°	138.2	12.6
50°-60°	99.3	9.0
60°-70°	68.3	6.2
70°-80°	38.7	3.5
80°-90°	11.9	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	523.3	47.7
0°-40°	741.7	67.5
0°-60°	979.2	89.2
0°-90°	1098.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1098.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	768	
5°	757	71
15°	684	192
25°	573	260
35°	348	218
45°	175	138
55°	111	99
65°	69	68
75°	36	39
85°	11	12
90°	0	



TEST NUMBER: P251979

CATALOG NUMBER: LD4B10D010 EU4B10209030 4LBBA1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	767.9
2.5°	765.5
5°	757.1
7.5°	743.3
10°	726.0
12.5°	705.6
15°	683.5
17.5°	659.6
20°	635.0
22.5°	606.3
25°	572.8
27.5°	529.7
30°	476.4
32.5°	414.2
35°	347.7
37.5°	289.1
40°	240.6
42.5°	202.9
45°	174.8
47.5°	153.2
50°	136.5
52.5°	122.7
55°	110.7
57.5°	98.8
60°	88.0
62.5°	77.8
65°	68.8
67.5°	59.9
70°	51.5
72.5°	43.7
75°	36.5
77.5°	29.3
80°	22.7
82.5°	16.8
85°	10.8
87.5°	4.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)