

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P206931

Luminaire Tested: **LD4B10D010 EU4B10209730 4LBWB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P206931
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B10D010 EU4B10209730 4LBWB1
Description: PORTFOLIO 4 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SPECULAR BLACK TRIM
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W
DL3-11.1W DLE-11.39W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 391.7 lumens
Efficiency: N/A
Efficacy: 39.6 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 1.03
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P206931

CATALOG NUMBER: LD4B10D010 EU4B10209730 4LBWB1

Luminous Intensity Polar Plot

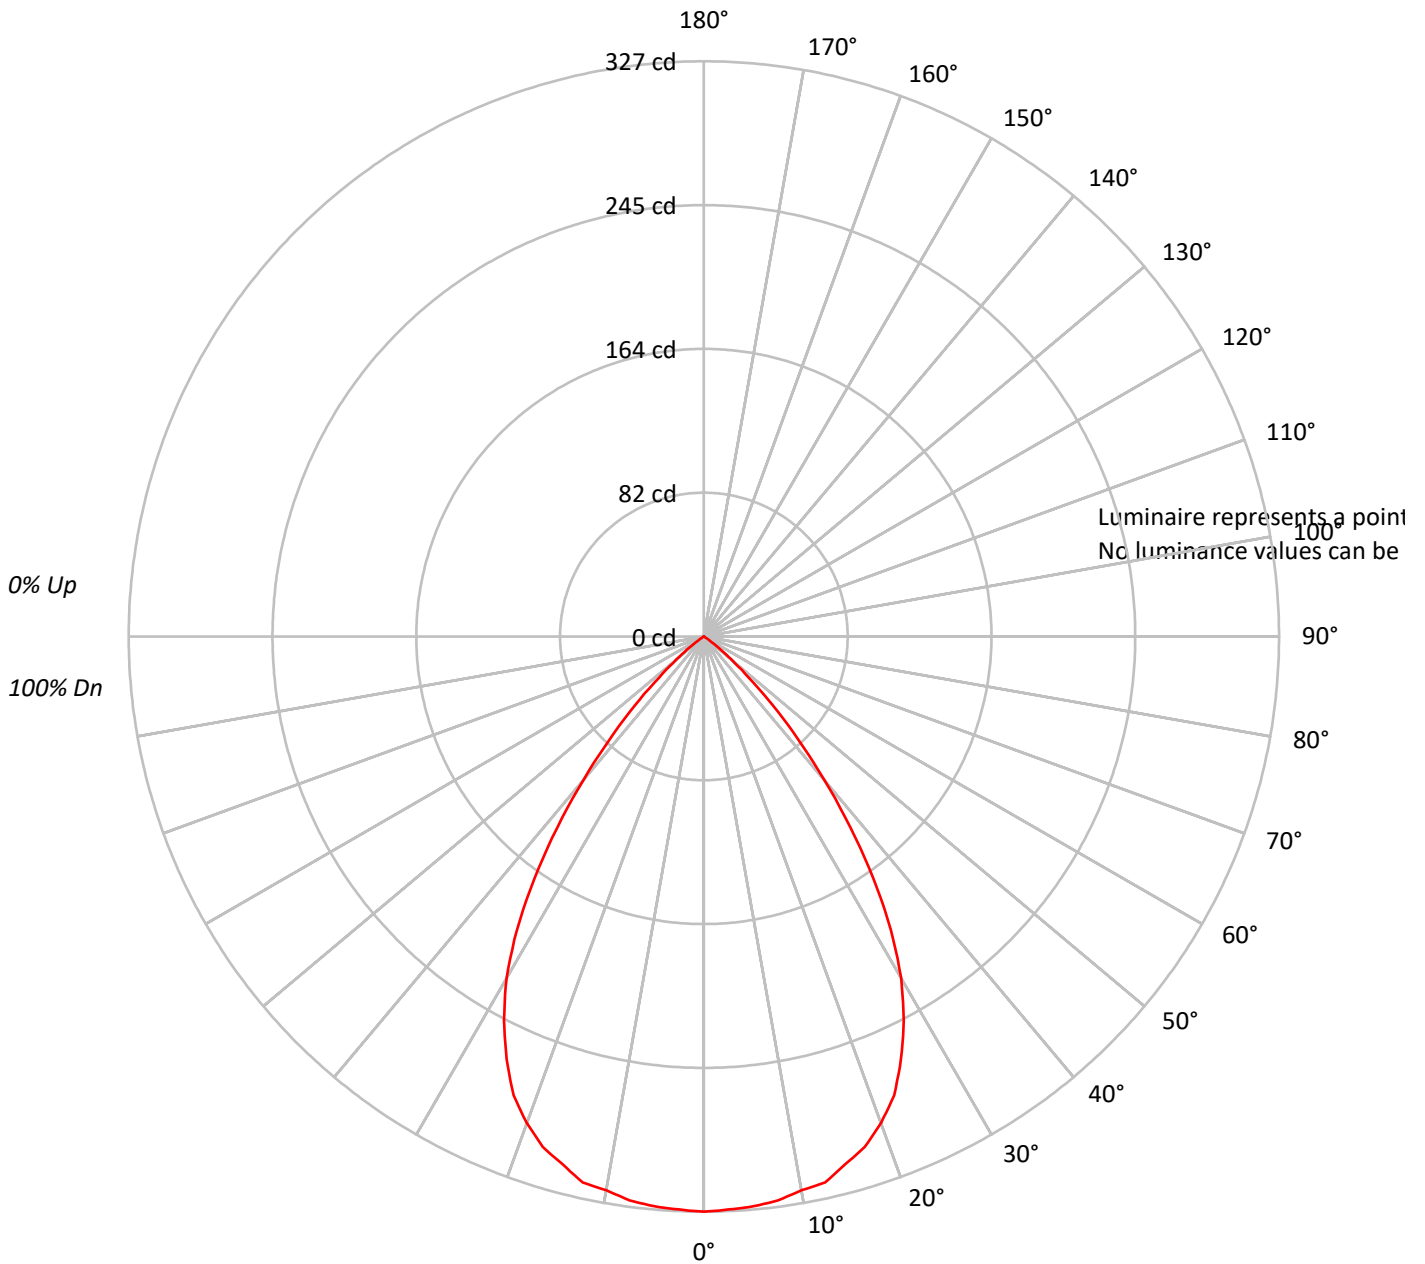



TEST NUMBER: P206931

CATALOG NUMBER: LD4B10D010 EU4B10209730 4LBWB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93																
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86			86																
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79			79																
4	96	88	82	77	94	86	81	77	84	79	76	82	78	75	80	77	74	72			72																
5	90	81	75	70	89	80	74	70	79	73	69	77	72	69	75	71	68	67			67																
6	85	76	69	65	84	75	69	64	73	68	64	72	67	64	70	66	63	62			62																
7	80	71	64	60	79	70	64	59	69	63	59	67	62	59	66	62	58	57			57																
8	76	66	60	55	75	65	59	55	64	59	55	63	58	54	62	58	54	53			53																
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49			49																
10	68	58	52	48	67	58	52	48	57	51	47	56	51	47	55	50	47	46			46																

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P206931

CATALOG NUMBER: LD4B10D010 EU4B10209730 4LBWB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.9	7.9
10°-20°	87.5	22.3
20°-30°	120.9	30.9
30°-40°	103.5	26.4
40°-50°	44.0	11.2
50°-60°	4.9	1.3
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	239.3	61.1
0°-40°	342.8	87.5
0°-60°	391.7	100.0
0°-90°	391.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	391.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	327	
5°	325	31
15°	311	87
25°	265	121
35°	168	104
45°	55	44
55°	3	5
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P206931

CATALOG NUMBER: LD4B10D010 EU4B10209730 4LBWB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	327.0
2.5°	326.1
5°	325.2
7.5°	323.3
10°	319.7
12.5°	317.9
15°	310.6
17.5°	304.3
20°	294.3
22.5°	282.5
25°	265.2
27.5°	246.1
30°	224.3
32.5°	198.0
35°	168.0
37.5°	137.1
40°	106.3
42.5°	79.0
45°	55.4
47.5°	34.5
50°	20.0
52.5°	10.0
55°	2.7
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)