

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207546

Luminaire Tested: **LD4B10D010 EU4B10209040 4LBMMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207546
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B10D010 EU4B10209040 4LBMMW1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W
DL3-11.1W DLE-11.39W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 729.0 lumens
Efficiency: N/A
Efficacy: 73.6 lumens/watt
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207546

CATALOG NUMBER: LD4B10D010 EU4B10209040 4LBMMW1

Luminous Intensity Polar Plot

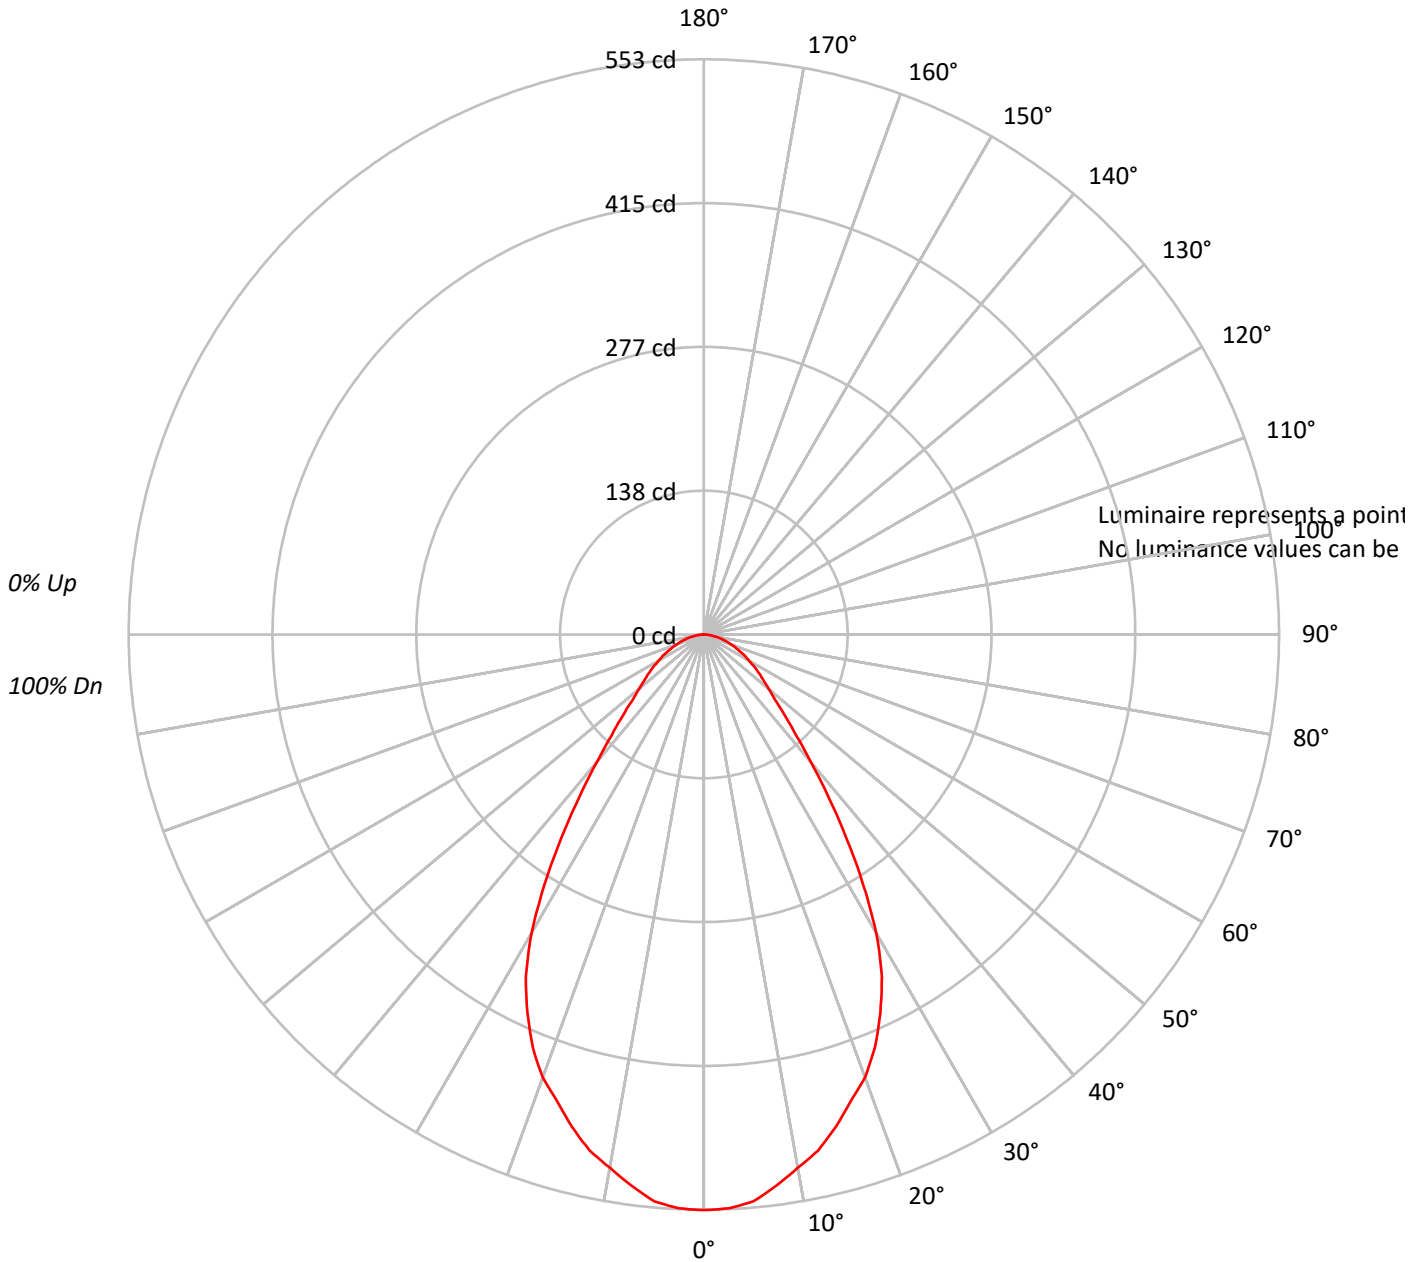



TEST NUMBER: P207546

CATALOG NUMBER: LD4B10D010 EU4B10209040 4LBMMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89			
2	104	98	92	88	102	96	91	87	93	89	85	89	86	83	87	84	81	80			
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71			
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	69	66	64			
5	85	75	67	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58			
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53			
7	75	64	57	52	74	63	56	51	62	56	51	60	55	51	59	54	50	49			
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45			
9	67	55	48	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42			
10	63	52	45	41	62	51	45	41	51	45	40	50	44	40	49	44	40	39			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207546

CATALOG NUMBER: LD4B10D010 EU4B10209040 4LBMMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.3	7.0
10°-20°	137.5	18.9
20°-30°	182.8	25.1
30°-40°	149.6	20.5
40°-50°	87.1	11.9
50°-60°	57.7	7.9
60°-70°	38.0	5.2
70°-80°	20.0	2.8
80°-90°	4.9	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	371.7	51.0
0°-40°	521.2	71.5
0°-60°	666.1	91.4
0°-90°	729.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	729.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	553	
5°	547	51
15°	490	138
25°	401	183
35°	239	150
45°	110	87
55°	64	58
65°	38	38
75°	19	20
85°	4	5
90°	0	



TEST NUMBER: P207546

CATALOG NUMBER: LD4B10D010 EU4B10209040 4LBMMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	553.4
2.5°	552.3
5°	547.1
7.5°	534.4
10°	520.7
12.5°	508.0
15°	490.0
17.5°	470.0
20°	453.1
22.5°	429.8
25°	401.3
27.5°	370.7
30°	331.6
32.5°	285.2
35°	238.7
37.5°	196.4
40°	159.5
42.5°	131.0
45°	109.8
47.5°	92.9
50°	81.3
52.5°	71.8
55°	64.4
57.5°	57.0
60°	49.6
62.5°	44.4
65°	38.0
67.5°	32.7
70°	27.5
72.5°	23.2
75°	19.0
77.5°	14.8
80°	10.6
82.5°	7.4
85°	4.2
87.5°	1.1
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)