

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207649

Luminaire Tested: **LD4B10D010 EU4B10209040 4LBNH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207649
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B10D010 EU4B10209040 4LBNH1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W
DL3-11.1W DLE-11.39W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 582.2 lumens
Efficiency: N/A
Efficacy: 58.8 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207649

CATALOG NUMBER: LD4B10D010 EU4B10209040 4LBNH1

Luminous Intensity Polar Plot

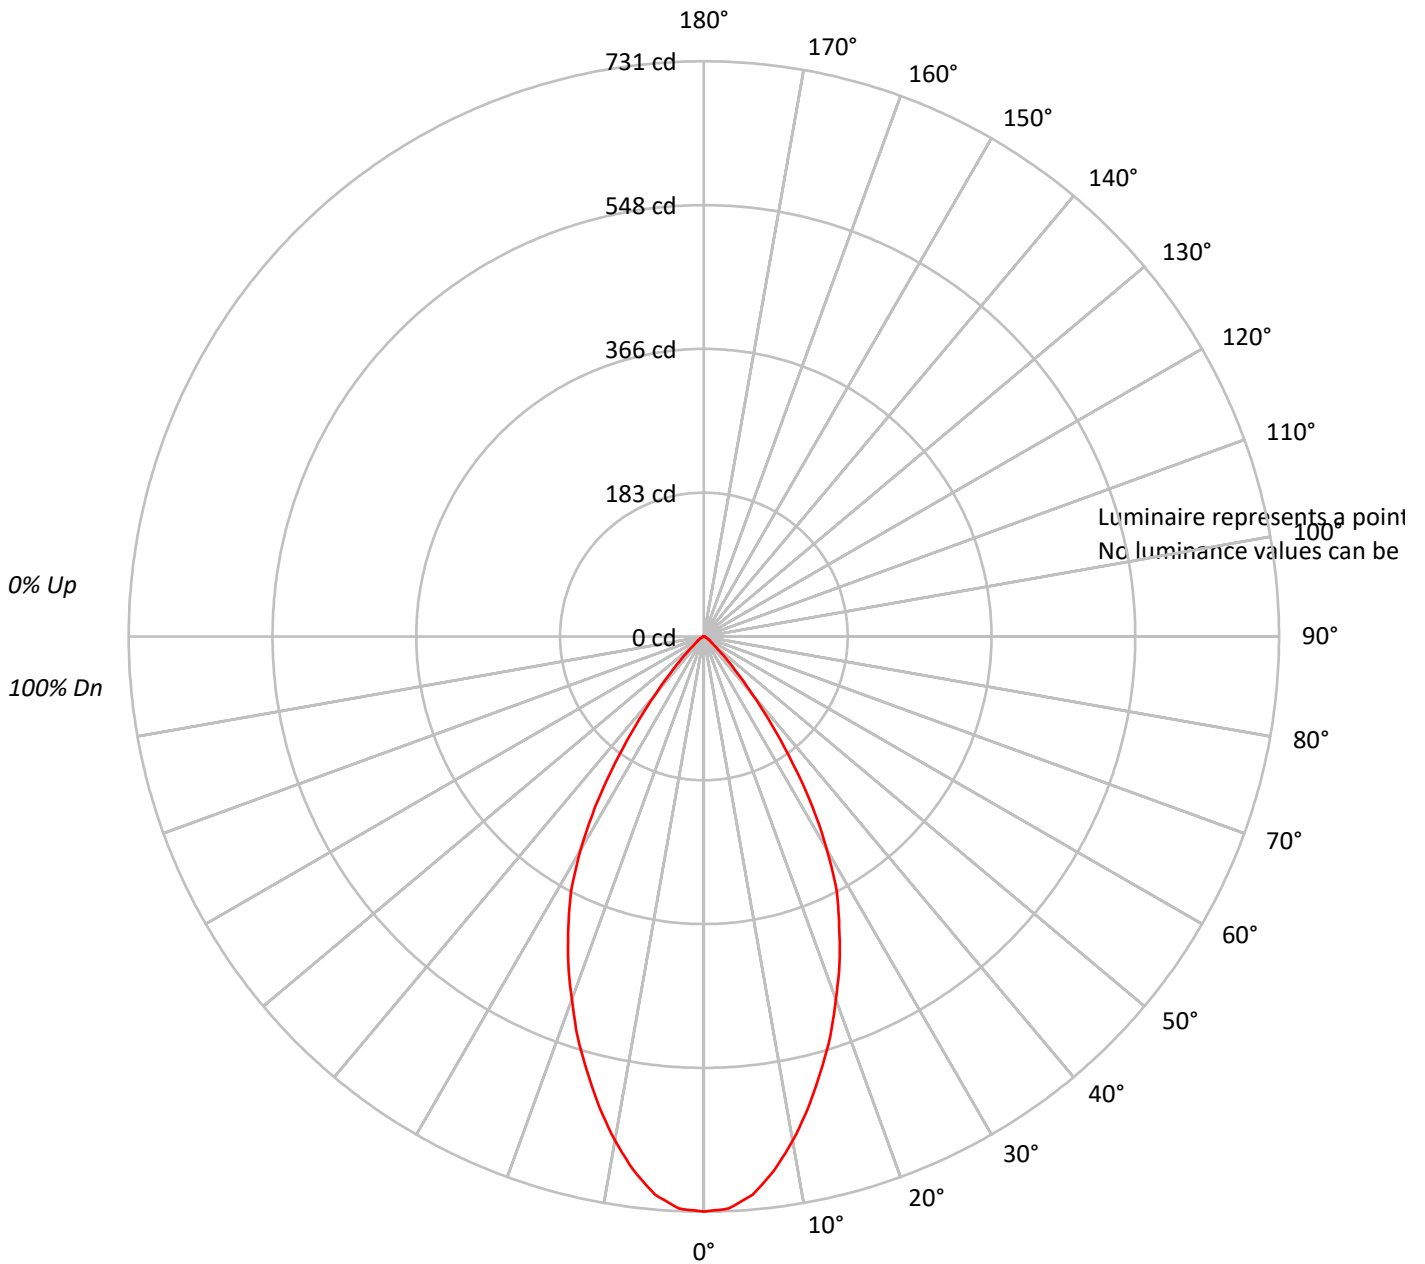



TEST NUMBER: P207649

CATALOG NUMBER: LD4B10D010 EU4B10209040 4LBNH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70			
6	88	79	73	69	86	78	72	68	76	72	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58			
9	76	66	60	56	74	65	60	56	65	59	56	64	59	56	63	59	55	54			
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207649

CATALOG NUMBER: LD4B10D010 EU4B10209040 4LBNH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.9	11.3
10°-20°	160.0	27.5
20°-30°	185.7	31.9
30°-40°	123.0	21.1
40°-50°	34.5	5.9
50°-60°	8.7	1.5
60°-70°	3.3	0.6
70°-80°	1.1	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	411.6	70.7
0°-40°	534.6	91.8
0°-60°	577.8	99.2
0°-90°	582.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	582.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	731	
5°	712	66
15°	573	160
25°	407	186
35°	197	123
45°	40	35
55°	10	9
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P207649

CATALOG NUMBER: LD4B10D010 EU4B10209040 4LBNH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	730.9
2.5°	727.7
5°	711.9
7.5°	684.5
10°	650.7
12.5°	612.8
15°	572.7
17.5°	533.7
20°	490.4
22.5°	450.4
25°	407.1
27.5°	366.0
30°	313.2
32.5°	257.3
35°	197.2
37.5°	141.3
40°	96.0
42.5°	62.2
45°	40.1
47.5°	24.3
50°	15.8
52.5°	11.6
55°	9.5
57.5°	7.4
60°	5.3
62.5°	4.2
65°	3.2
67.5°	2.1
70°	2.1
72.5°	1.1
75°	1.1
77.5°	1.1
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)