

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P208061

Luminaire Tested: **LD4B10D010 EU4B10209040 4LBWLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P208061
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B10D010 EU4B10209040 4LBWLI1
Description: PORTFOLIO 4 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W
DL3-11.1W DLE-11.39W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 922.3 lumens
Efficiency: N/A
Efficacy: 93.2 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P208061

CATALOG NUMBER: LD4B10D010 EU4B10209040 4LBWLI1

Luminous Intensity Polar Plot

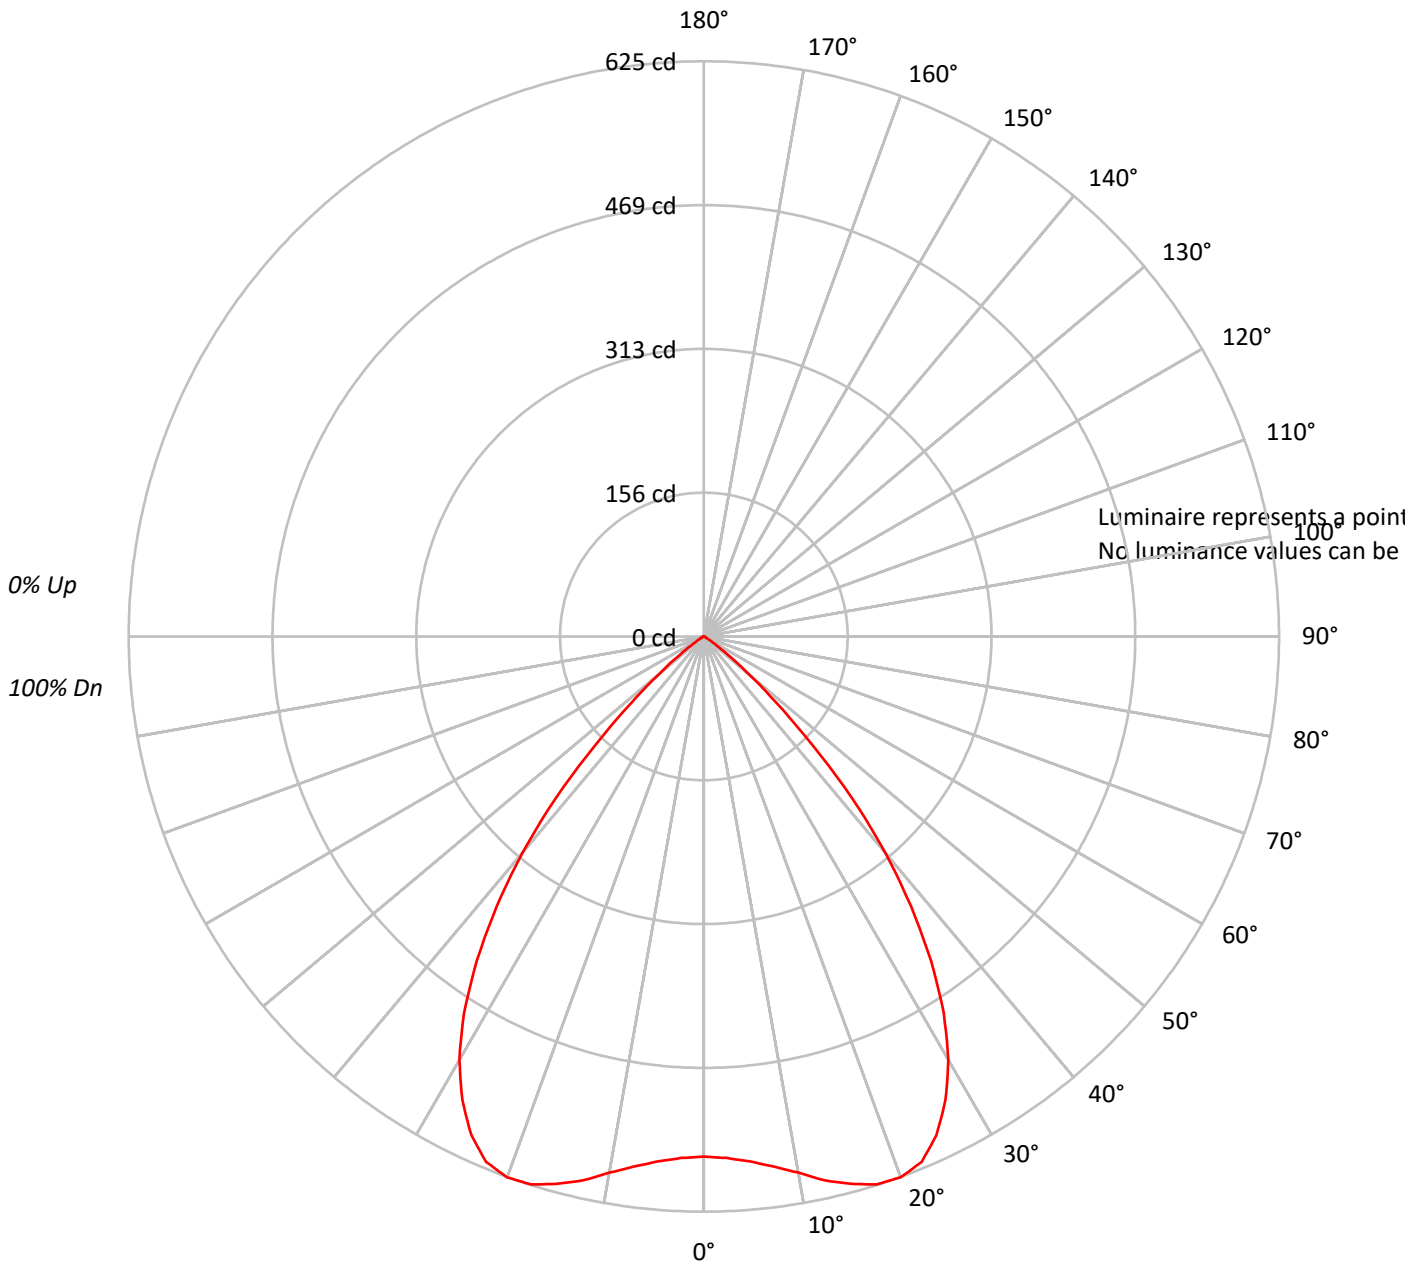



TEST NUMBER: P208061

CATALOG NUMBER: LD4B10D010 EU4B10209040 4LBWLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92			92																
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84			84																
3	100	93	87	83	98	92	86	82	89	85	81	86	83	80	84	81	78	77			77																
4	94	86	79	75	92	84	79	74	82	77	73	80	76	72	78	75	72	70			70																
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64			64																
6	83	73	66	62	82	72	66	61	71	65	61	69	64	60	68	63	60	58			58																
7	78	68	61	56	77	67	61	56	66	60	56	64	59	55	63	59	55	54			54																
8	74	63	56	52	72	62	56	51	61	55	51	60	55	51	59	54	51	49			49																
9	69	59	52	48	68	58	52	47	57	51	47	56	51	47	55	50	47	45			45																
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42			42																

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P208061

CATALOG NUMBER: LD4B10D010 EU4B10209040 4LBWLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.3	6.0
10°-20°	174.4	18.9
20°-30°	272.1	29.5
30°-40°	264.7	28.7
40°-50°	132.2	14.3
50°-60°	20.5	2.2
60°-70°	2.5	0.3
70°-80°	0.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	501.7	54.4
0°-40°	766.5	83.1
0°-60°	919.1	99.7
0°-90°	922.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	922.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	565	
5°	572	55
15°	616	174
25°	598	272
35°	430	265
45°	166	132
55°	17	20
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P208061

CATALOG NUMBER: LD4B10D010 EU4B10209040 4LBWLI1

CANDELA DISTRIBUTION (FULL):

	0°
0°	565.1
2.5°	567.2
5°	572.5
7.5°	581.0
10°	591.5
12.5°	605.3
15°	615.8
17.5°	624.3
20°	625.3
22.5°	618.0
25°	597.9
27.5°	568.3
30°	531.3
32.5°	484.9
35°	429.9
37.5°	369.7
40°	306.3
42.5°	238.7
45°	165.8
47.5°	106.7
50°	64.4
52.5°	34.9
55°	16.9
57.5°	7.4
60°	4.2
62.5°	3.2
65°	2.1
67.5°	2.1
70°	1.1
72.5°	1.1
75°	1.1
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)