

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207027

Luminaire Tested: **LD4B10D010 EU4B10208050 4LBWMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207027
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B10D010 EU4B10208050 4LBWMW1
Description: PORTFOLIO 4 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W
DL3-11.1W DLE-11.39W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 971.4 lumens
Efficiency: N/A
Efficacy: 98.1 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.09
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207027

CATALOG NUMBER: LD4B10D010 EU4B10208050 4LBWMW1

Luminous Intensity Polar Plot

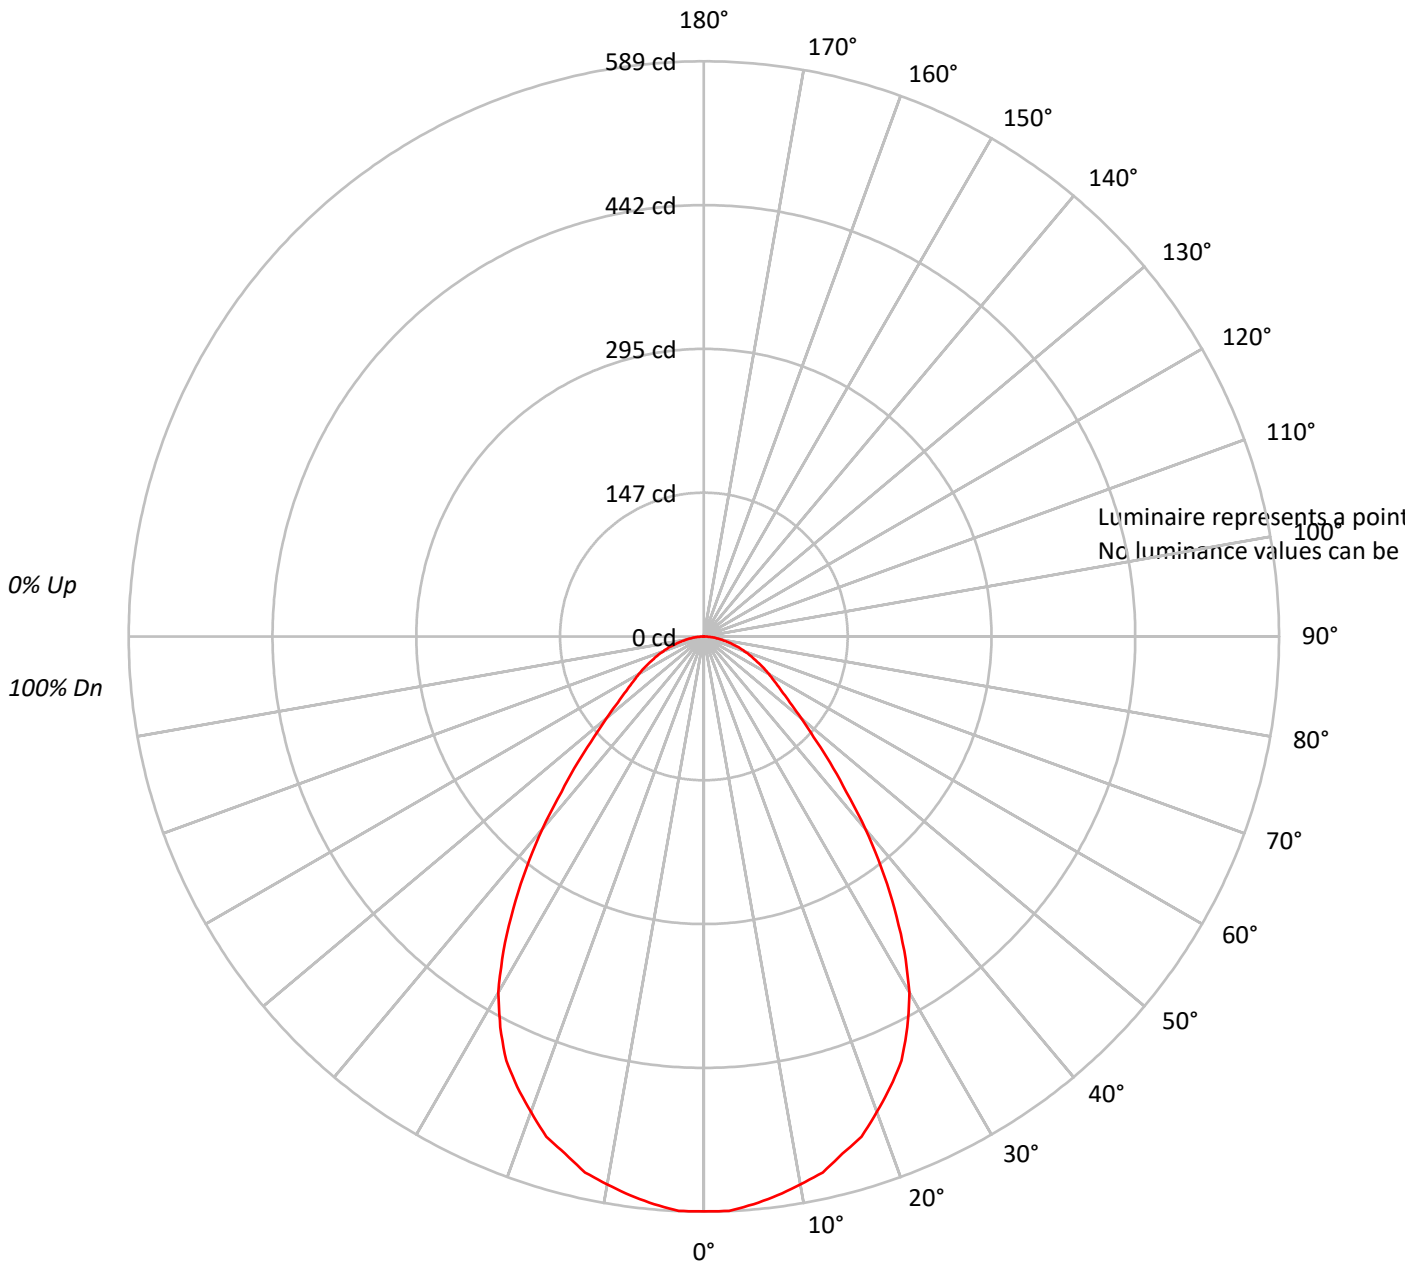



TEST NUMBER: P207027

CATALOG NUMBER: LD4B10D010 EU4B10208050 4LBWMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88																			
2	103	96	91	86	101	94	89	85	91	87	83	88	84	81	85	82	80	78																			
3	96	87	80	75	93	85	79	74	83	77	73	80	76	72	78	74	71	69																			
4	89	79	72	66	87	78	71	66	75	69	65	73	68	64	71	67	63	61																			
5	83	72	64	59	81	71	64	58	69	63	58	67	62	57	65	61	57	55																			
6	78	66	58	53	76	65	58	53	64	57	52	62	56	52	60	55	51	50																			
7	73	61	53	48	71	60	53	48	59	52	47	57	51	47	56	51	47	45																			
8	68	56	49	44	67	56	49	44	54	48	43	53	47	43	52	47	43	41																			
9	64	52	45	40	63	52	45	40	51	44	40	50	44	40	49	43	39	38																			
10	61	49	42	37	59	48	41	37	47	41	37	46	41	37	46	40	36	35																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207027

CATALOG NUMBER: LD4B10D010 EU4B10208050 4LBWMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.3	5.7
10°-20°	154.6	15.9
20°-30°	218.4	22.5
30°-40°	211.6	21.8
40°-50°	142.8	14.7
50°-60°	88.6	9.1
60°-70°	59.2	6.1
70°-80°	32.4	3.3
80°-90°	8.6	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	428.3	44.1
0°-40°	639.8	65.9
0°-60°	871.2	89.7
0°-90°	971.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	971.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	589	
5°	584	55
15°	548	155
25°	479	218
35°	340	212
45°	183	143
55°	97	89
65°	59	59
75°	30	32
85°	8	9
90°	0	



TEST NUMBER: P207027

CATALOG NUMBER: LD4B10D010 EU4B10208050 4LBMMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	588.7
2.5°	588.7
5°	583.6
7.5°	577.3
10°	569.8
12.5°	562.2
15°	548.3
17.5°	537.0
20°	518.1
22.5°	499.2
25°	479.0
27.5°	451.3
30°	421.0
32.5°	381.9
35°	340.3
37.5°	298.7
40°	257.2
42.5°	215.6
45°	182.8
47.5°	152.5
50°	129.8
52.5°	110.9
55°	97.1
57.5°	85.7
60°	76.9
62.5°	68.1
65°	59.2
67.5°	51.7
70°	44.1
72.5°	37.8
75°	30.3
77.5°	24.0
80°	17.6
82.5°	12.6
85°	7.6
87.5°	2.5
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)