

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P206826

Luminaire Tested: **LD4B10D010 EU4B10209050 4LBWGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P206826
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B10D010 EU4B10209050 4LBWGPH1
Description: PORTFOLIO 4 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTIONWITH GRAPHITE HAZE TRIM
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W
DL3-11.1W DLE-11.39W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 612.3 lumens
Efficiency: N/A
Efficacy: 61.8 lumens/watt
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.08
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P206826

CATALOG NUMBER: LD4B10D010 EU4B10209050 4LBWGPH1

Luminous Intensity Polar Plot

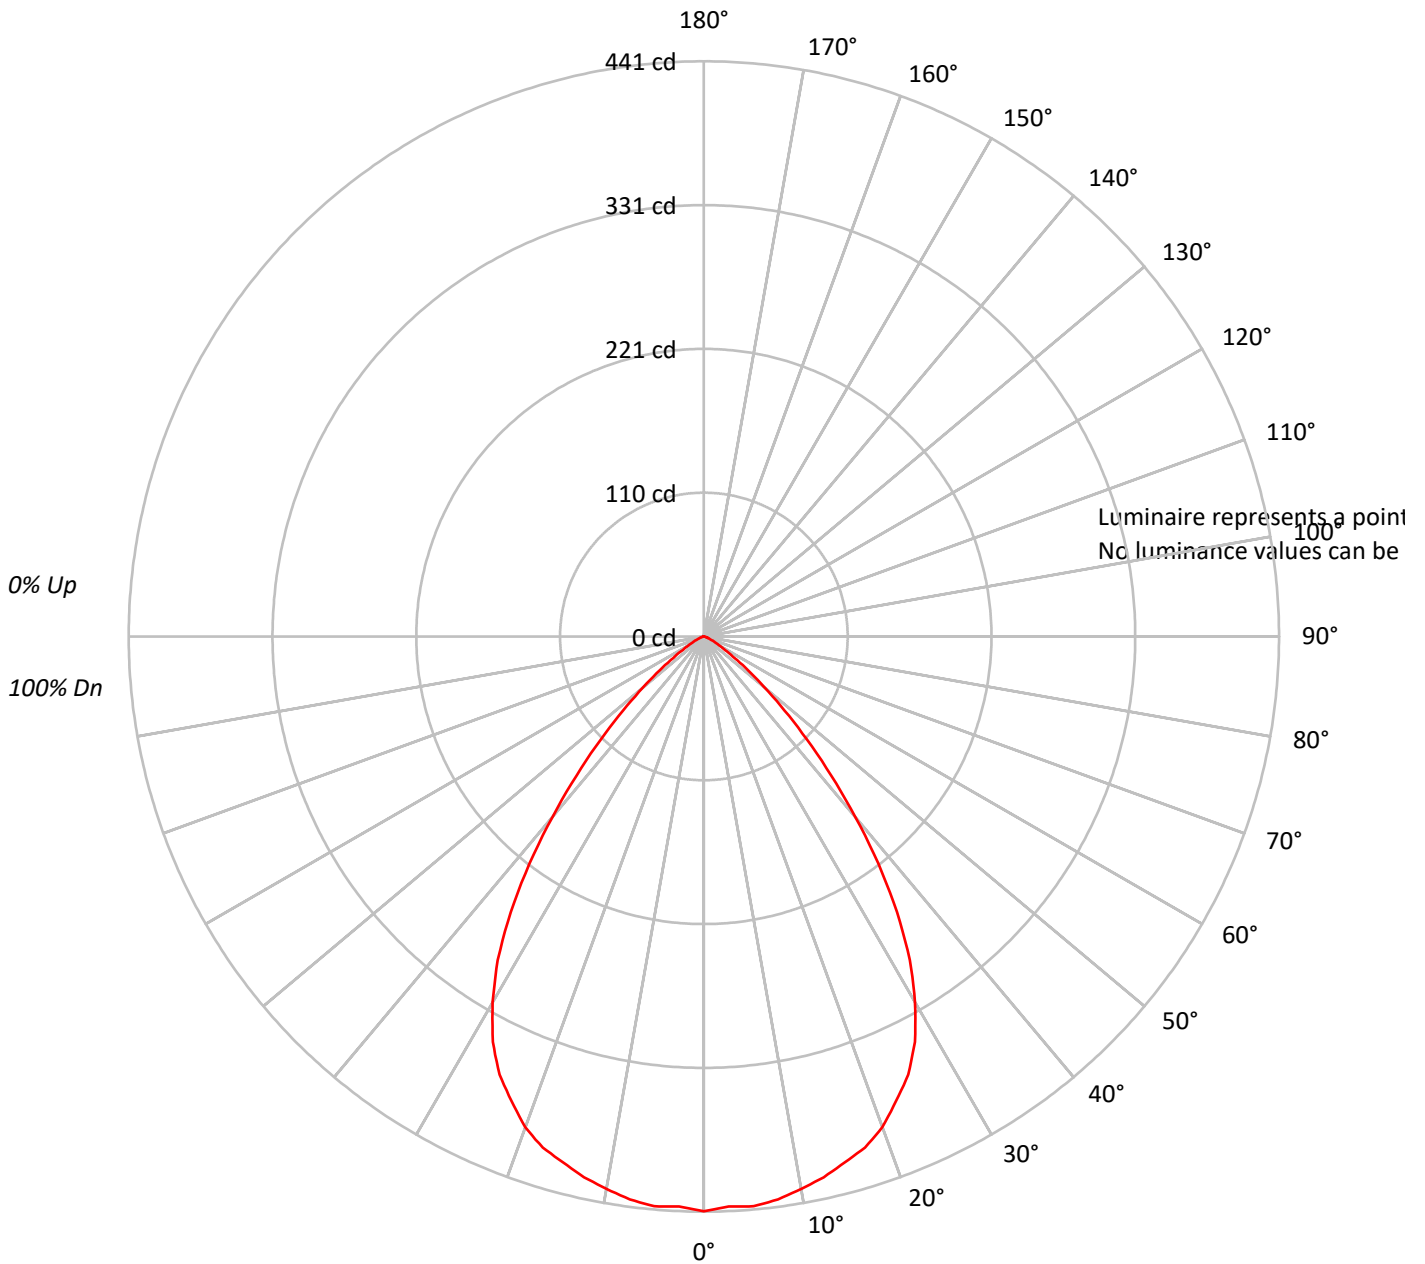



TEST NUMBER: P206826

CATALOG NUMBER: LD4B10D010 EU4B10209050 4LBWGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100											100																	
1	113	110	107	104	110	107	105	103	103	101	99	100	98	96	96	95	94	92											92																	
2	106	100	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83											83																	
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	77	76											76																	
4	94	85	78	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69											69																	
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	64	63											63																	
6	83	72	65	61	81	71	65	60	70	64	60	68	63	59	67	63	59	57											57																	
7	78	67	60	55	76	66	60	55	65	59	55	64	58	55	63	58	54	53											53																	
8	73	62	56	51	72	62	55	51	61	55	50	59	54	50	58	54	50	48											48																	
9	69	58	51	47	68	58	51	47	57	51	47	56	50	46	55	50	46	45											45																	
10	65	54	48	43	64	54	48	43	53	47	43	52	47	43	51	46	43	41											41																	

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P206826

CATALOG NUMBER: LD4B10D010 EU4B10209050 4LBWGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	41.6	6.8
10°-20°	117.8	19.2
20°-30°	168.9	27.6
30°-40°	159.1	26.0
40°-50°	87.8	14.3
50°-60°	28.2	4.6
60°-70°	7.1	1.2
70°-80°	1.7	0.3
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	328.3	53.6
0°-40°	487.3	79.6
0°-60°	603.4	98.5
0°-90°	612.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	612.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	441	
5°	438	42
15°	417	118
25°	371	169
35°	258	159
45°	112	88
55°	29	28
65°	6	7
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P206826

CATALOG NUMBER: LD4B10D010 EU4B10209050 4LBWGPH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	440.7
2.5°	437.5
5°	438.5
7.5°	435.3
10°	430.0
12.5°	424.7
15°	417.3
17.5°	410.9
20°	400.3
22.5°	385.4
25°	370.6
27.5°	350.4
30°	323.9
32.5°	294.1
35°	258.0
37.5°	219.8
40°	180.5
42.5°	144.4
45°	111.5
47.5°	83.9
50°	60.5
52.5°	42.5
55°	28.7
57.5°	19.1
60°	13.8
62.5°	9.6
65°	6.4
67.5°	4.2
70°	3.2
72.5°	2.1
75°	1.1
77.5°	1.1
80°	1.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)