

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207967

Luminaire Tested: **LD4B15D010 EU4B10209024 4LBNMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207967
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B15D010 EU4B10209024 4LBNMW1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 771.0 lumens
Efficiency: N/A
Efficacy: 53.9 lumens/watt
Spacing Criteria (0/90/45): 0.96 / 0.96 / 0.95
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207967

CATALOG NUMBER: LD4B15D010 EU4B10209024 4LBNMW1

Luminous Intensity Polar Plot

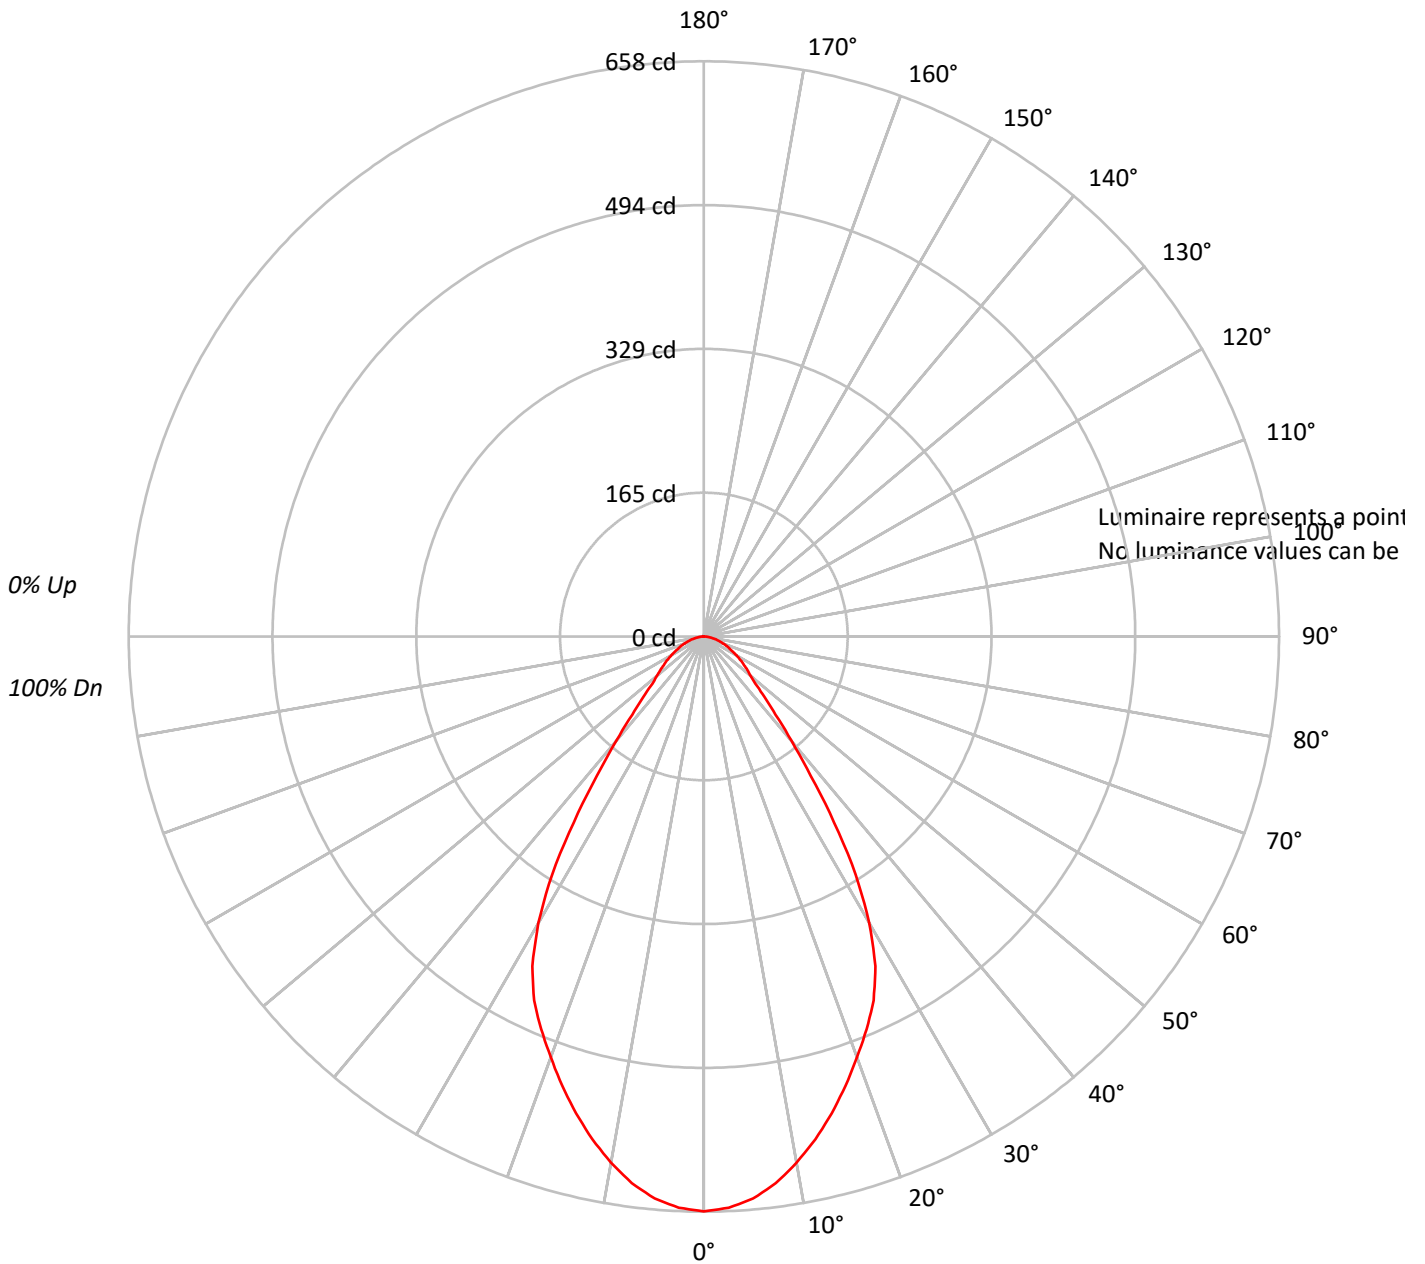



TEST NUMBER: P207967

CATALOG NUMBER: LD4B15D010 EU4B10209024 4LBNMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	105	103	109	106	104	101	102	100	98	98	97	95	95	94	92	90			
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			
3	98	90	84	80	96	89	83	79	86	82	78	84	80	76	81	78	75	73			
4	92	83	76	71	90	82	76	71	80	74	70	78	73	69	76	72	68	67			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	63	61			
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	62	57	53	52			
8	73	62	55	50	71	61	55	50	60	54	50	59	53	49	58	53	49	48			
9	69	58	51	46	68	57	51	46	56	50	46	55	50	46	54	49	46	44			
10	65	54	48	43	64	54	47	43	53	47	43	52	47	43	51	46	43	41			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207967

CATALOG NUMBER: LD4B15D010 EU4B10209024 4LBNMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.5	7.8
10°-20°	158.3	20.5
20°-30°	208.4	27.0
30°-40°	162.2	21.0
40°-50°	78.8	10.2
50°-60°	49.8	6.5
60°-70°	32.1	4.2
70°-80°	16.8	2.2
80°-90°	4.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	427.2	55.4
0°-40°	589.4	76.4
0°-60°	718.0	93.1
0°-90°	771.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	771.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	658	
5°	646	61
15°	565	158
25°	459	208
35°	260	162
45°	98	79
55°	55	50
65°	32	32
75°	16	17
85°	4	4
90°	0	



TEST NUMBER: P207967

CATALOG NUMBER: LD4B15D010 EU4B10209024 4LBNMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	657.7
2.5°	654.1
5°	645.5
7.5°	630.8
10°	611.2
12.5°	589.1
15°	564.7
17.5°	538.9
20°	512.0
22.5°	486.3
25°	459.3
27.5°	425.0
30°	378.5
32.5°	323.4
35°	259.7
37.5°	200.9
40°	155.6
42.5°	121.3
45°	98.0
47.5°	79.6
50°	69.8
52.5°	62.5
55°	55.1
57.5°	49.0
60°	42.9
62.5°	36.7
65°	31.8
67.5°	28.2
70°	23.3
72.5°	19.6
75°	15.9
77.5°	12.2
80°	8.6
82.5°	6.1
85°	3.7
87.5°	1.2
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)