

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207346

Luminaire Tested: **LD4B15D010 EU4B10208035 4LBMGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207346
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B15D010 EU4B10208035 4LBMGPH1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 827.4 lumens
Efficiency: N/A
Efficacy: 57.9 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.92
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207346

CATALOG NUMBER: LD4B15D010 EU4B10208035 4LBMGPH1

Luminous Intensity Polar Plot

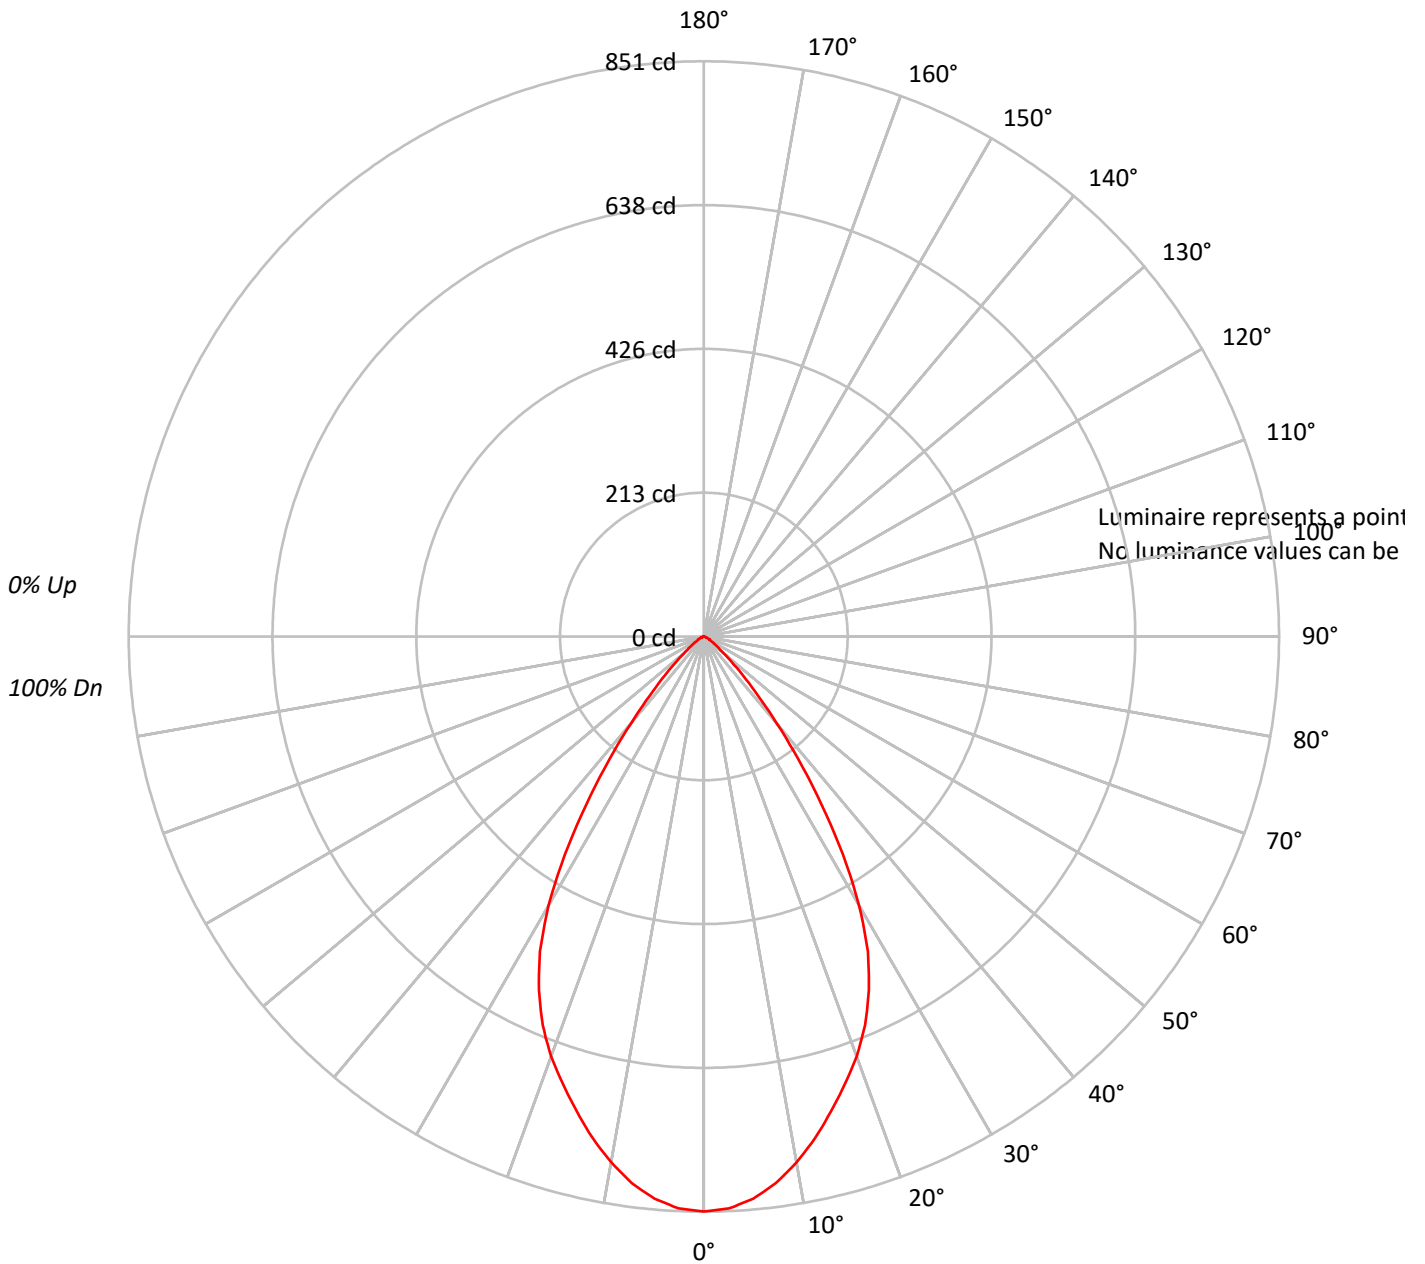



TEST NUMBER: P207346

CATALOG NUMBER: LD4B15D010 EU4B10208035 4LBMGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93			
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	88	86			
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83	81	79			
4	96	88	82	78	94	87	82	78	85	80	77	83	79	76	81	78	75	73			
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68			
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	64	63			
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59			
8	77	67	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55			
9	73	63	57	53	72	63	57	53	62	57	53	61	56	53	60	56	52	51			
10	70	60	54	50	69	59	54	50	59	53	50	58	53	49	57	52	49	48			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207346

CATALOG NUMBER: LD4B15D010 EU4B10208035 4LBMGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	78.3	9.5
10°-20°	204.1	24.7
20°-30°	261.8	31.6
30°-40°	189.2	22.9
40°-50°	67.9	8.2
50°-60°	18.3	2.2
60°-70°	6.0	0.7
70°-80°	1.8	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	544.2	65.8
0°-40°	733.4	88.6
0°-60°	819.6	99.1
0°-90°	827.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	827.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	851	
5°	835	78
15°	727	204
25°	578	262
35°	303	189
45°	82	68
55°	19	18
65°	5	6
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P207346

CATALOG NUMBER: LD4B15D010 EU4B10208035 4LBMGPH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	850.7
2.5°	847.2
5°	835.0
7.5°	815.9
10°	789.8
12.5°	760.2
15°	727.1
17.5°	694.1
20°	661.0
22.5°	622.8
25°	577.5
27.5°	525.4
30°	459.3
32.5°	382.7
35°	302.7
37.5°	229.6
40°	167.0
42.5°	118.3
45°	81.8
47.5°	55.7
50°	36.5
52.5°	26.1
55°	19.1
57.5°	13.9
60°	10.4
62.5°	8.7
65°	5.2
67.5°	3.5
70°	3.5
72.5°	1.7
75°	1.7
77.5°	1.7
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)