

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P206631

Luminaire Tested: **LD4B15D010 EU4B10209035 4LBWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P206631
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B15D010 EU4B10209035 4LBWH1
Description: PORTFOLIO 4 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1082.7 lumens
Efficiency: N/A
Efficacy: 75.7 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P206631

CATALOG NUMBER: LD4B15D010 EU4B10209035 4LBWH1

Luminous Intensity Polar Plot

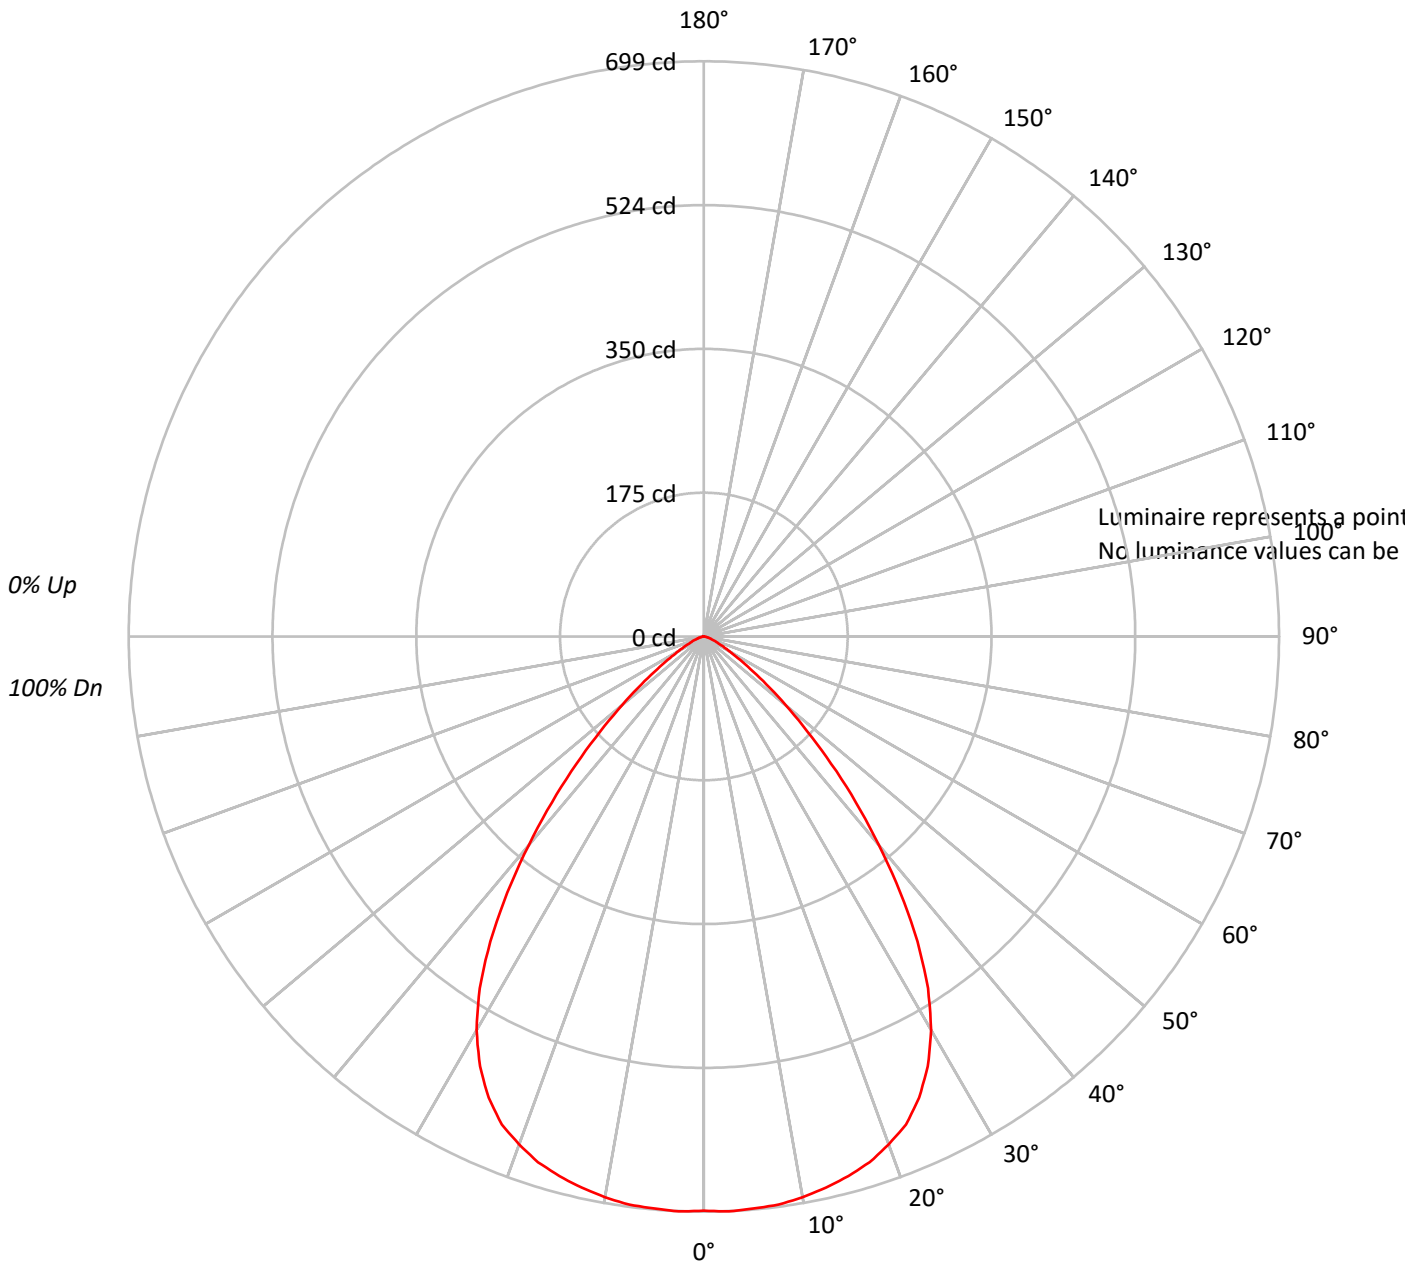



TEST NUMBER: P206631

CATALOG NUMBER: LD4B15D010 EU4B10209035 4LBWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91																			
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82																			
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74																			
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67																			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61																			
6	81	71	64	58	80	70	63	58	68	62	58	67	61	57	65	61	57	55																			
7	76	65	58	53	75	65	58	53	63	57	53	62	56	52	61	56	52	50																			
8	72	60	53	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46																			
9	68	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	43																			
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P206631

CATALOG NUMBER: LD4B15D010 EU4B10209035 4LBWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.5	6.1
10°-20°	191.5	17.7
20°-30°	282.6	26.1
30°-40°	278.9	25.8
40°-50°	170.7	15.8
50°-60°	65.4	6.0
60°-70°	20.4	1.9
70°-80°	6.0	0.6
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	540.5	49.9
0°-40°	819.4	75.7
0°-60°	1055.5	97.5
0°-90°	1082.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1082.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	698	
5°	698	66
15°	679	191
25°	618	283
35°	452	279
45°	219	171
55°	69	65
65°	19	20
75°	6	6
85°	0	1
90°	0	



TEST NUMBER: P206631

CATALOG NUMBER: LD4B15D010 EU4B10209035 4LBWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	697.9
2.5°	699.3
5°	697.9
7.5°	696.4
10°	692.0
12.5°	686.1
15°	678.8
17.5°	669.9
20°	656.7
22.5°	642.0
25°	618.5
27.5°	589.1
30°	552.4
32.5°	506.9
35°	452.5
37.5°	392.3
40°	330.6
42.5°	273.3
45°	218.9
47.5°	170.4
50°	129.3
52.5°	95.5
55°	69.1
57.5°	48.5
60°	35.3
62.5°	26.4
65°	19.1
67.5°	14.7
70°	10.3
72.5°	7.3
75°	5.9
77.5°	2.9
80°	2.9
82.5°	1.5
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)