

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P208072

Luminaire Tested: **LD4B15D010 EU4B10209035 4LBWLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P208072
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B15D010 EU4B10209035 4LBWLI1
Description: PORTFOLIO 4 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1282.6 lumens
Efficiency: N/A
Efficacy: 89.7 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P208072

CATALOG NUMBER: LD4B15D010 EU4B10209035 4LBWLI1

Luminous Intensity Polar Plot

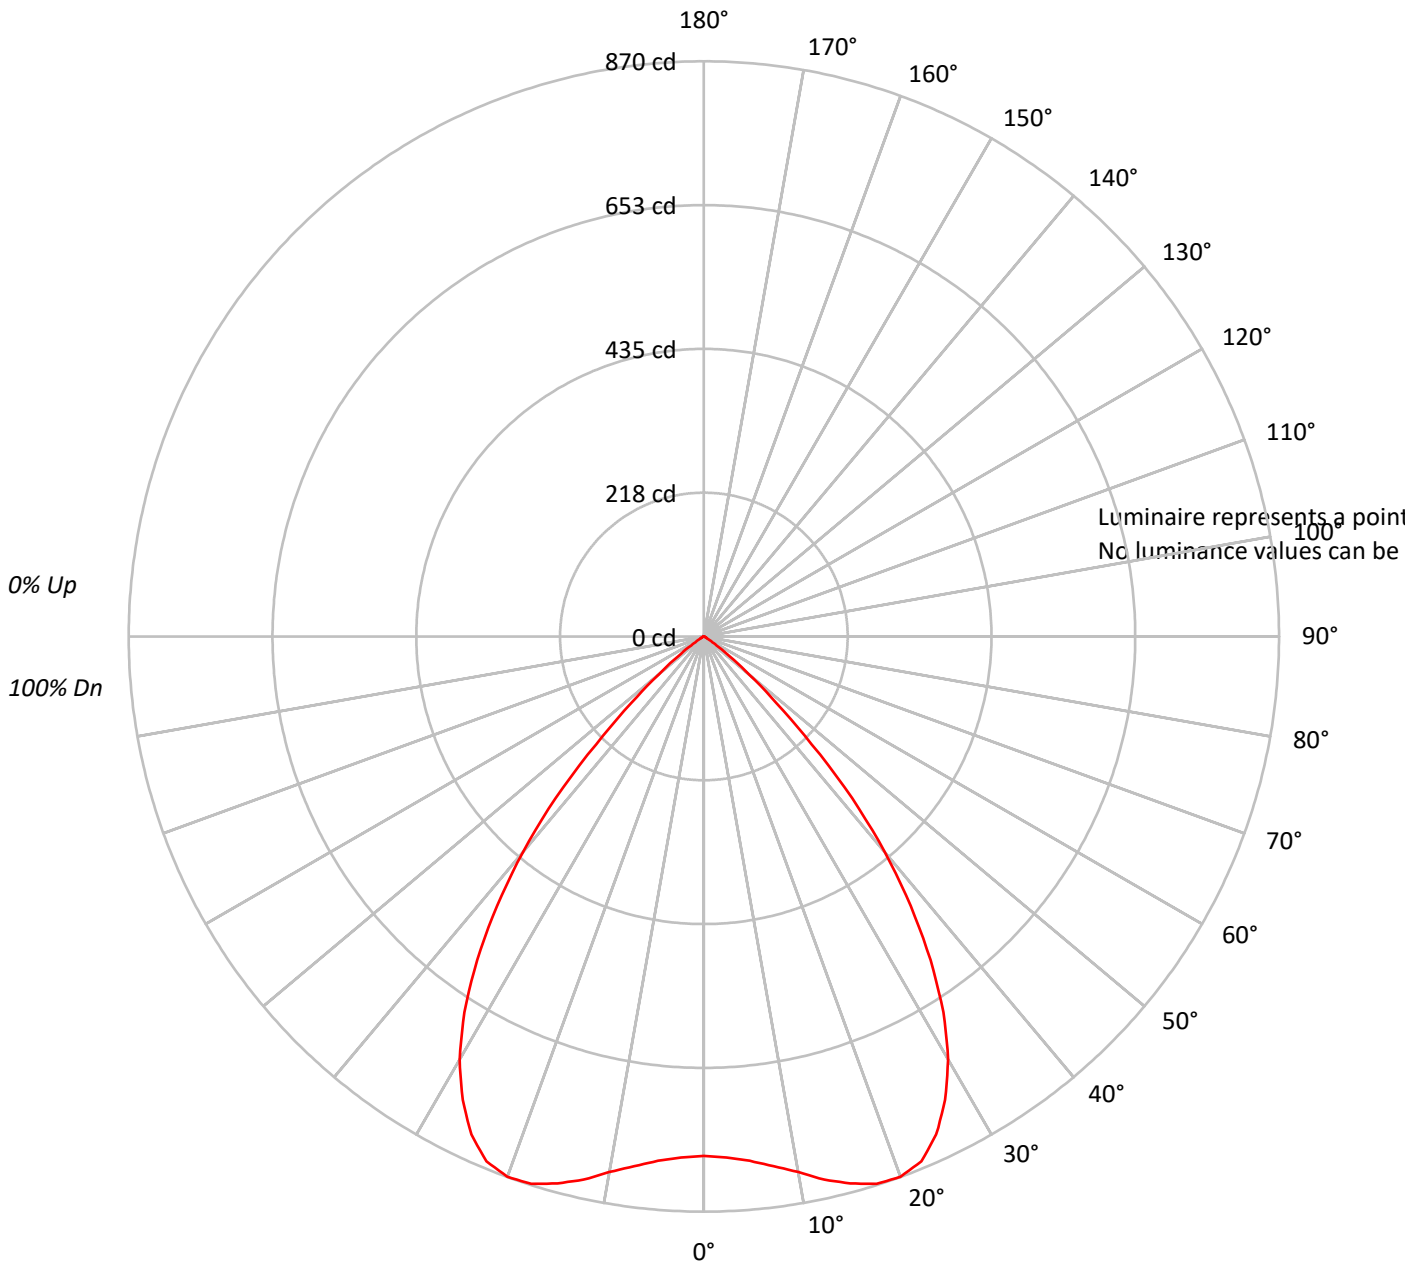



TEST NUMBER: P208072

CATALOG NUMBER: LD4B15D010 EU4B10209035 4LBWLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92				92															
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84				84															
3	100	93	87	83	98	92	86	82	89	85	81	86	83	80	84	81	78	77				77															
4	94	86	79	75	92	84	79	74	82	77	73	80	76	72	78	75	72	70				70															
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64				64															
6	83	73	66	62	82	72	66	61	71	65	61	69	64	60	68	63	60	58				58															
7	78	68	61	56	77	67	61	56	66	60	56	64	59	55	63	59	55	54				54															
8	74	63	56	52	72	62	56	51	61	55	51	60	55	51	59	54	51	49				49															
9	69	59	52	48	68	58	52	47	57	51	47	56	51	47	55	50	47	45				45															
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42				42															

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P208072

CATALOG NUMBER: LD4B15D010 EU4B10209035 4LBWLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.8	6.0
10°-20°	242.5	18.9
20°-30°	378.3	29.5
30°-40°	368.1	28.7
40°-50°	183.9	14.3
50°-60°	28.5	2.2
60°-70°	3.4	0.3
70°-80°	1.0	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	697.7	54.4
0°-40°	1065.8	83.1
0°-60°	1278.1	99.7
0°-90°	1282.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1282.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	786	
5°	796	77
15°	856	243
25°	831	378
35°	598	368
45°	231	184
55°	24	28
65°	3	3
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P208072

CATALOG NUMBER: LD4B15D010 EU4B10209035 4LBWLI1

CANDELA DISTRIBUTION (FULL):

	0°
0°	785.8
2.5°	788.8
5°	796.1
7.5°	807.9
10°	822.5
12.5°	841.6
15°	856.3
17.5°	868.1
20°	869.5
22.5°	859.3
25°	831.4
27.5°	790.2
30°	738.8
32.5°	674.2
35°	597.8
37.5°	514.1
40°	426.0
42.5°	332.0
45°	230.6
47.5°	148.4
50°	89.6
52.5°	48.5
55°	23.5
57.5°	10.3
60°	5.9
62.5°	4.4
65°	2.9
67.5°	2.9
70°	1.5
72.5°	1.5
75°	1.5
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)