

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P206317

Luminaire Tested: **LD4B15D010 EU4B10208040 4LBCSMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P206317  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD4B15D010 EU4B10208040 4LBCSMW1  
Description: PORTFOLIO 4 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM  
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W  
DL3-15.28W DLE-15.432W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1616.2 lumens  
Efficiency: N/A  
Efficacy: 113.0 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P206317

CATALOG NUMBER: LD4B15D010 EU4B10208040 4LBCSMW1

### Luminous Intensity Polar Plot

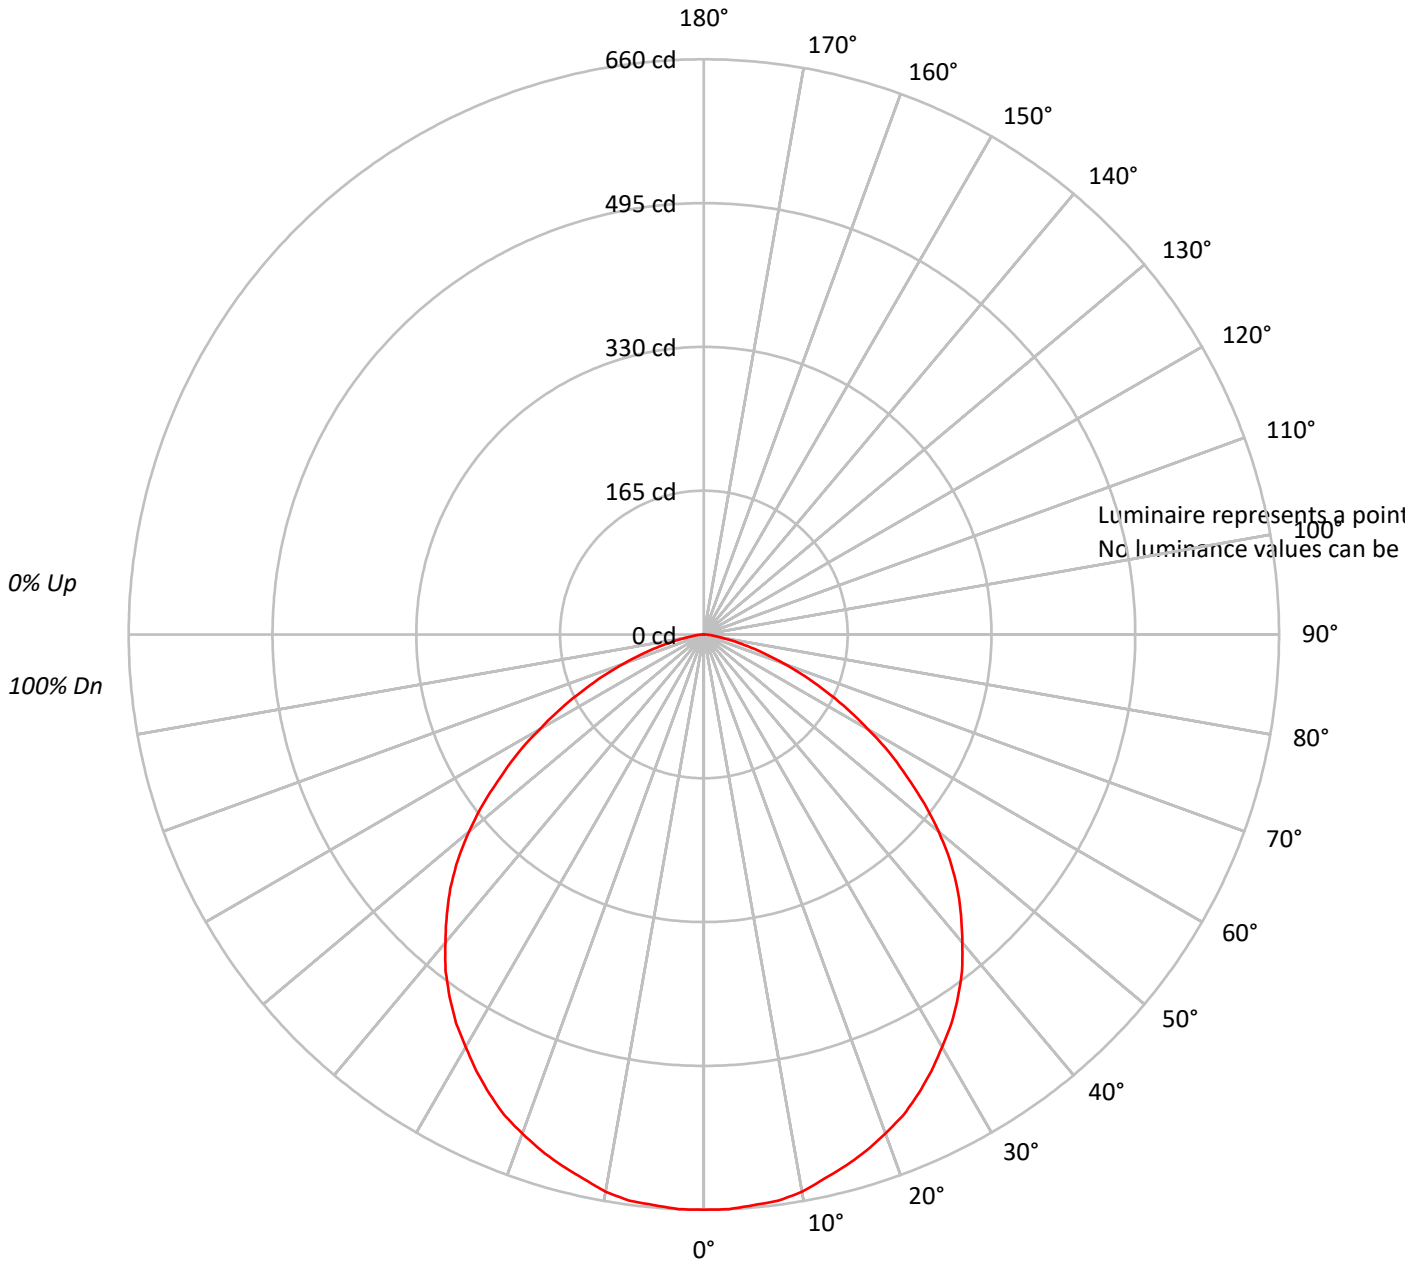



TEST NUMBER: P206317

CATALOG NUMBER: LD4B15D010 EU4B10208040 4LBCSMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87				87
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74				74
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63				63
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55				55
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48				48
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42				42
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37				37
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33				33
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30				30
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27				27

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P206317

CATALOG NUMBER: LD4B15D010 EU4B10208040 4LBCSMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	62.5	3.9
10°-20°	178.0	11.0
20°-30°	267.9	16.6
30°-40°	317.4	19.6
40°-50°	315.9	19.5
50°-60°	254.7	15.8
60°-70°	154.1	9.5
70°-80°	57.2	3.5
80°-90°	8.5	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	508.4	31.5
0°-40°	825.9	51.1
0°-60°	1396.4	86.4
0°-90°	1616.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1616.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	660	
5°	657	63
15°	631	178
25°	582	268
35°	508	317
45°	411	316
55°	284	255
65°	155	154
75°	52	57
85°	7	9
90°	0	



TEST NUMBER: P206317

CATALOG NUMBER: LD4B15D010 EU4B10208040 4LBCSMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	660.1
2.5°	660.1
5°	657.2
7.5°	655.2
10°	649.3
12.5°	639.5
15°	630.7
17.5°	620.9
20°	609.2
22.5°	597.4
25°	581.8
27.5°	565.1
30°	546.5
32.5°	528.9
35°	508.3
37.5°	486.8
40°	461.3
42.5°	436.8
45°	411.3
47.5°	382.9
50°	351.6
52.5°	319.3
55°	284.0
57.5°	252.7
60°	217.4
62.5°	186.1
65°	154.7
67.5°	125.4
70°	97.9
72.5°	73.5
75°	51.9
77.5°	33.3
80°	19.6
82.5°	11.8
85°	6.9
87.5°	2.9
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)