

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P208269

Luminaire Tested: **LD4B15D010 EU4B10208040 4LBNI11**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P208269  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD4B15D010 EU4B10208040 4LBNI1  
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
NARROW DISTRIBUTION WITH SPECULAR CLEAR TRIM  
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W  
DL3-15.28W DLE-15.432W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1140.2 lumens  
Efficiency: N/A  
Efficacy: 79.7 lumens/watt  
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct

Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P208269  
CATALOG NUMBER: LD4B15D010 EU4B10208040 4LBNLI1

### Luminous Intensity Polar Plot

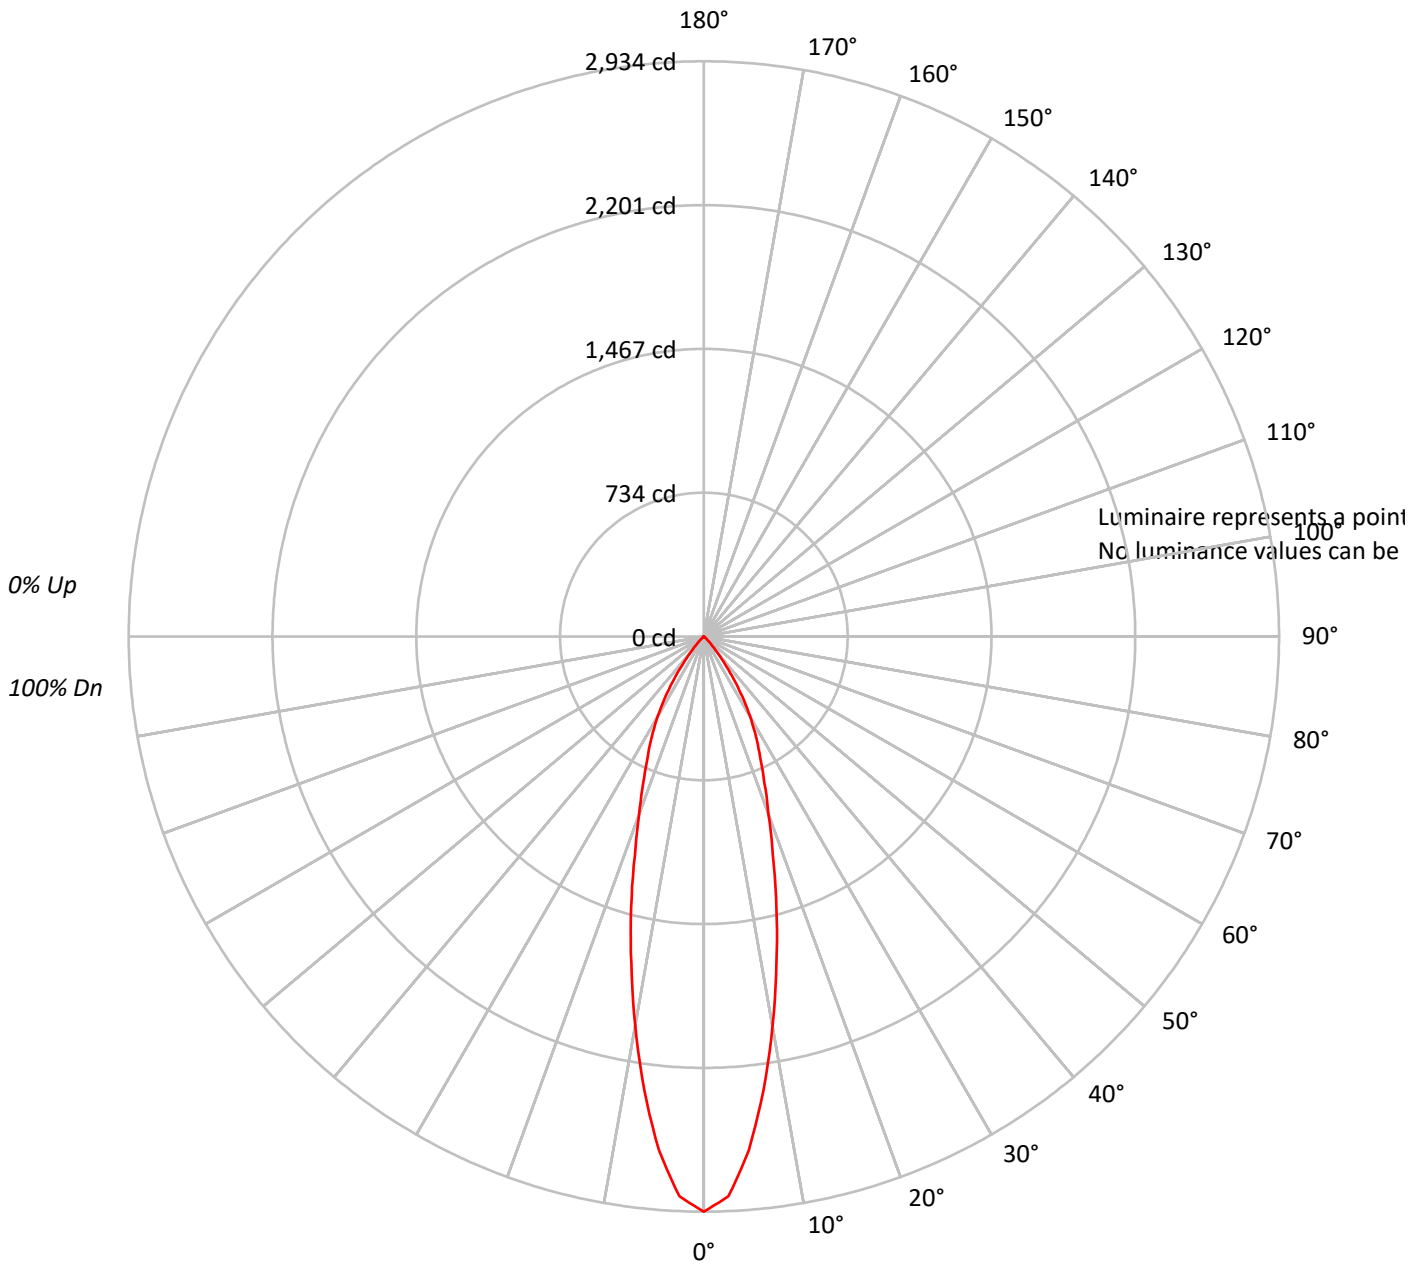



TEST NUMBER: P208269

CATALOG NUMBER: LD4B15D010 EU4B10208040 4LBNLI1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95		
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90		
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85		
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81		
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77		
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73		
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69		
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66		
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63		
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61		

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P208269

CATALOG NUMBER: LD4B15D010 EU4B10208040 4LBNLI1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	231.2	20.3
10°-20°	395.9	34.7
20°-30°	314.6	27.6
30°-40°	166.5	14.6
40°-50°	28.7	2.5
50°-60°	2.2	0.2
60°-70°	1.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	941.7	82.6
0°-40°	1108.3	97.2
0°-60°	1139.1	99.9
0°-90°	1140.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1140.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2934	
5°	2630	231
15°	1431	396
25°	678	315
35°	263	167
45°	30	29
55°	2	2
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P208269

CATALOG NUMBER: LD4B15D010 EU4B10208040 4LBNLI1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2934.2
2.5°	2858.6
5°	2630.4
7.5°	2331.9
10°	2015.8
12.5°	1710.3
15°	1431.1
17.5°	1171.2
20°	964.0
22.5°	806.0
25°	677.8
27.5°	574.2
30°	470.6
32.5°	365.2
35°	263.4
37.5°	173.8
40°	103.6
42.5°	59.7
45°	29.9
47.5°	10.5
50°	3.5
52.5°	3.5
55°	1.8
57.5°	1.8
60°	1.8
62.5°	1.8
65°	1.8
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)