

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P206109

Luminaire Tested: **LD4B15D010 EU4B10208040 4LBSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P206109
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B15D010 EU4B10208040 4LBSMW1
Description: PORTFOLIO 4 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1586.4 lumens
Efficiency: N/A
Efficacy: 110.9 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P206109

CATALOG NUMBER: LD4B15D010 EU4B10208040 4LBSMW1

Luminous Intensity Polar Plot

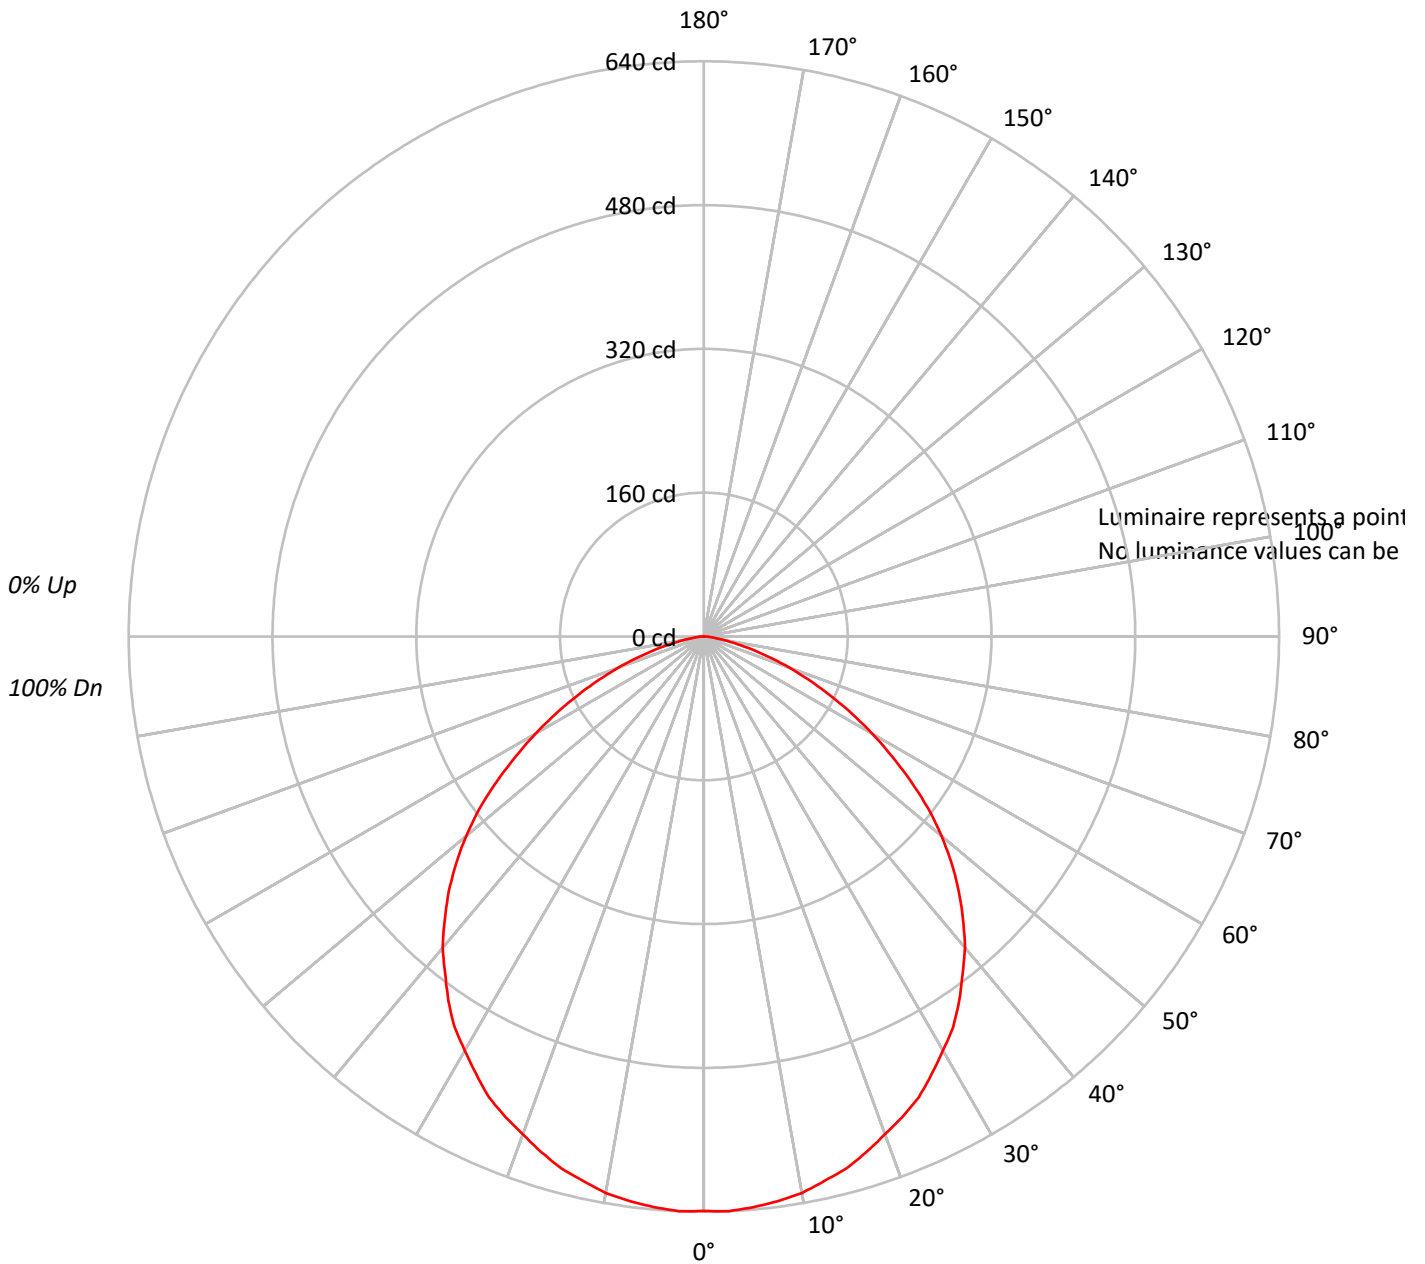



TEST NUMBER: P206109

CATALOG NUMBER: LD4B15D010 EU4B10208040 4LBSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86				86
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74				74
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63				63
4	85	74	65	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54				54
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47				47
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42				42
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37				37
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33				33
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30				30
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27				27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P206109

CATALOG NUMBER: LD4B15D010 EU4B10208040 4LBSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.6	3.8
10°-20°	172.6	10.9
20°-30°	260.0	16.4
30°-40°	309.4	19.5
40°-50°	308.8	19.5
50°-60°	251.1	15.8
60°-70°	154.5	9.7
70°-80°	59.8	3.8
80°-90°	9.6	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	493.2	31.1
0°-40°	802.5	50.6
0°-60°	1362.4	85.9
0°-90°	1586.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1586.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	639	
5°	637	61
15°	613	173
25°	566	260
35°	495	309
45°	401	309
55°	281	251
65°	155	155
75°	54	60
85°	8	10
90°	0	



TEST NUMBER: P206109

CATALOG NUMBER: LD4B15D010 EU4B10208040 4LBSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	639.2
2.5°	640.1
5°	637.3
7.5°	633.5
10°	628.8
12.5°	620.4
15°	612.8
17.5°	601.6
20°	589.3
22.5°	578.1
25°	565.8
27.5°	548.9
30°	532.0
32.5°	516.0
35°	495.4
37.5°	472.8
40°	452.1
42.5°	426.7
45°	401.4
47.5°	374.1
50°	345.0
52.5°	314.9
55°	281.0
57.5°	248.1
60°	216.2
62.5°	185.2
65°	155.1
67.5°	126.9
70°	100.6
72.5°	76.1
75°	54.5
77.5°	35.7
80°	21.6
82.5°	13.2
85°	7.5
87.5°	3.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)