

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205803

Luminaire Tested: **LD4B15D010 EU4B10209040 4LBSWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205803
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B15D010 EU4B10209040 4LBSWH1
Description: PORTFOLIO 4 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1281.4 lumens
Efficiency: N/A
Efficacy: 89.6 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1.08
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205803

CATALOG NUMBER: LD4B15D010 EU4B10209040 4LBSWH1

Luminous Intensity Polar Plot

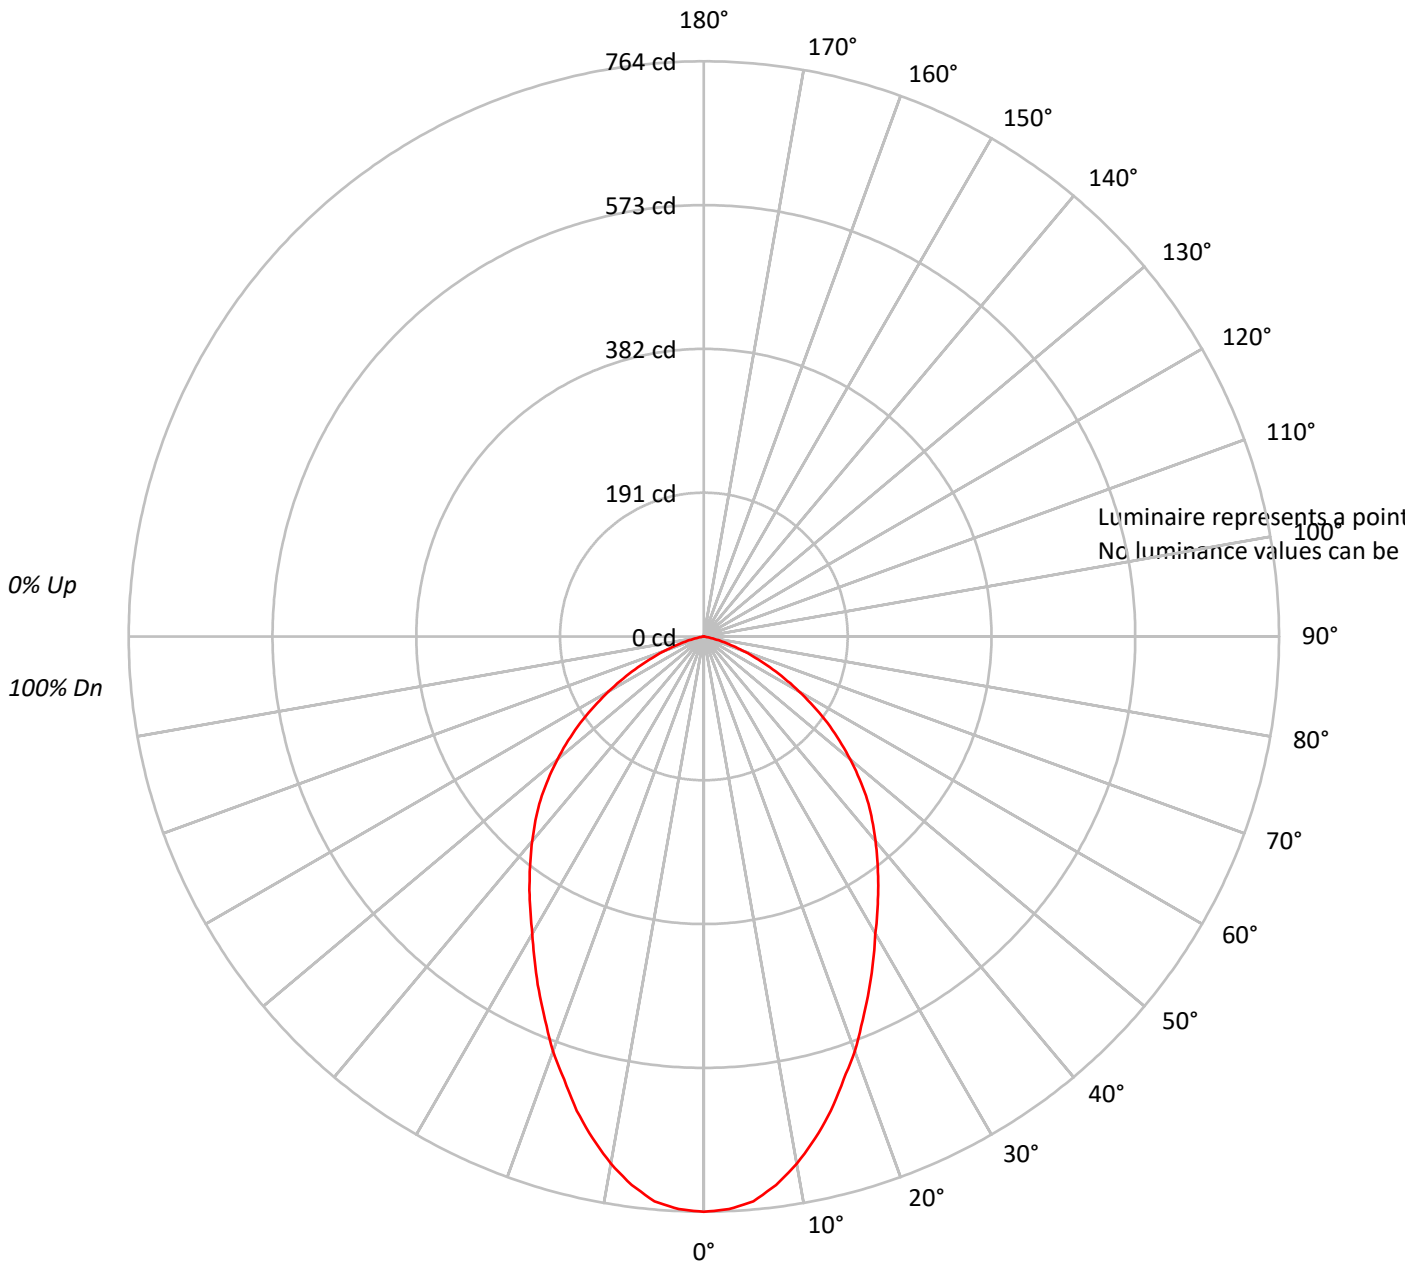



TEST NUMBER: P205803

CATALOG NUMBER: LD4B15D010 EU4B10209040 4LBSWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	89			
2	103	96	90	85	100	94	89	84	91	86	83	87	84	81	85	82	79	77			
3	95	86	79	73	93	84	78	73	82	76	72	79	74	70	76	73	69	67			
4	88	77	70	64	86	76	69	63	74	68	63	72	66	62	69	65	61	59			
5	81	70	62	56	79	69	62	56	67	60	55	65	59	55	63	58	54	52			
6	76	64	56	50	74	63	55	50	61	54	49	60	54	49	58	53	49	47			
7	71	58	51	45	69	58	50	45	56	49	45	55	49	44	54	48	44	42			
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38			
9	62	50	42	37	61	49	42	37	48	41	37	47	41	37	46	41	37	35			
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205803

CATALOG NUMBER: LD4B15D010 EU4B10209040 4LBSWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.5	5.5
10°-20°	182.5	14.2
20°-30°	238.6	18.6
30°-40°	252.7	19.7
40°-50°	235.7	18.4
50°-60°	178.5	13.9
60°-70°	96.7	7.5
70°-80°	25.9	2.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	491.6	38.4
0°-40°	744.3	58.1
0°-60°	1158.4	90.4
0°-90°	1281.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1281.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	764	
5°	753	70
15°	652	182
25°	519	239
35°	404	253
45°	307	236
55°	200	179
65°	97	97
75°	22	26
85°	0	0
90°	0	



TEST NUMBER: P205803

CATALOG NUMBER: LD4B15D010 EU4B10209040 4LBSWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	764.2
2.5°	761.4
5°	753.0
7.5°	734.8
10°	711.0
12.5°	682.9
15°	652.1
17.5°	617.0
20°	586.2
22.5°	551.1
25°	518.8
27.5°	486.6
30°	455.7
32.5°	429.1
35°	403.9
37.5°	378.6
40°	354.8
42.5°	330.9
45°	307.1
47.5°	280.5
50°	253.8
52.5°	227.2
55°	200.5
57.5°	172.5
60°	145.8
62.5°	120.6
65°	96.8
67.5°	74.3
70°	54.7
72.5°	37.9
75°	22.4
77.5°	9.8
80°	2.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)