

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207966

Luminaire Tested: **LD4B15D010 EU4B10208050 4LBNMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207966
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B15D010 EU4B10208050 4LBNMW1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1104.4 lumens
Efficiency: N/A
Efficacy: 77.2 lumens/watt
Spacing Criteria (0/90/45): 0.96 / 0.96 / 0.95
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207966

CATALOG NUMBER: LD4B15D010 EU4B10208050 4LBNMW1

Luminous Intensity Polar Plot

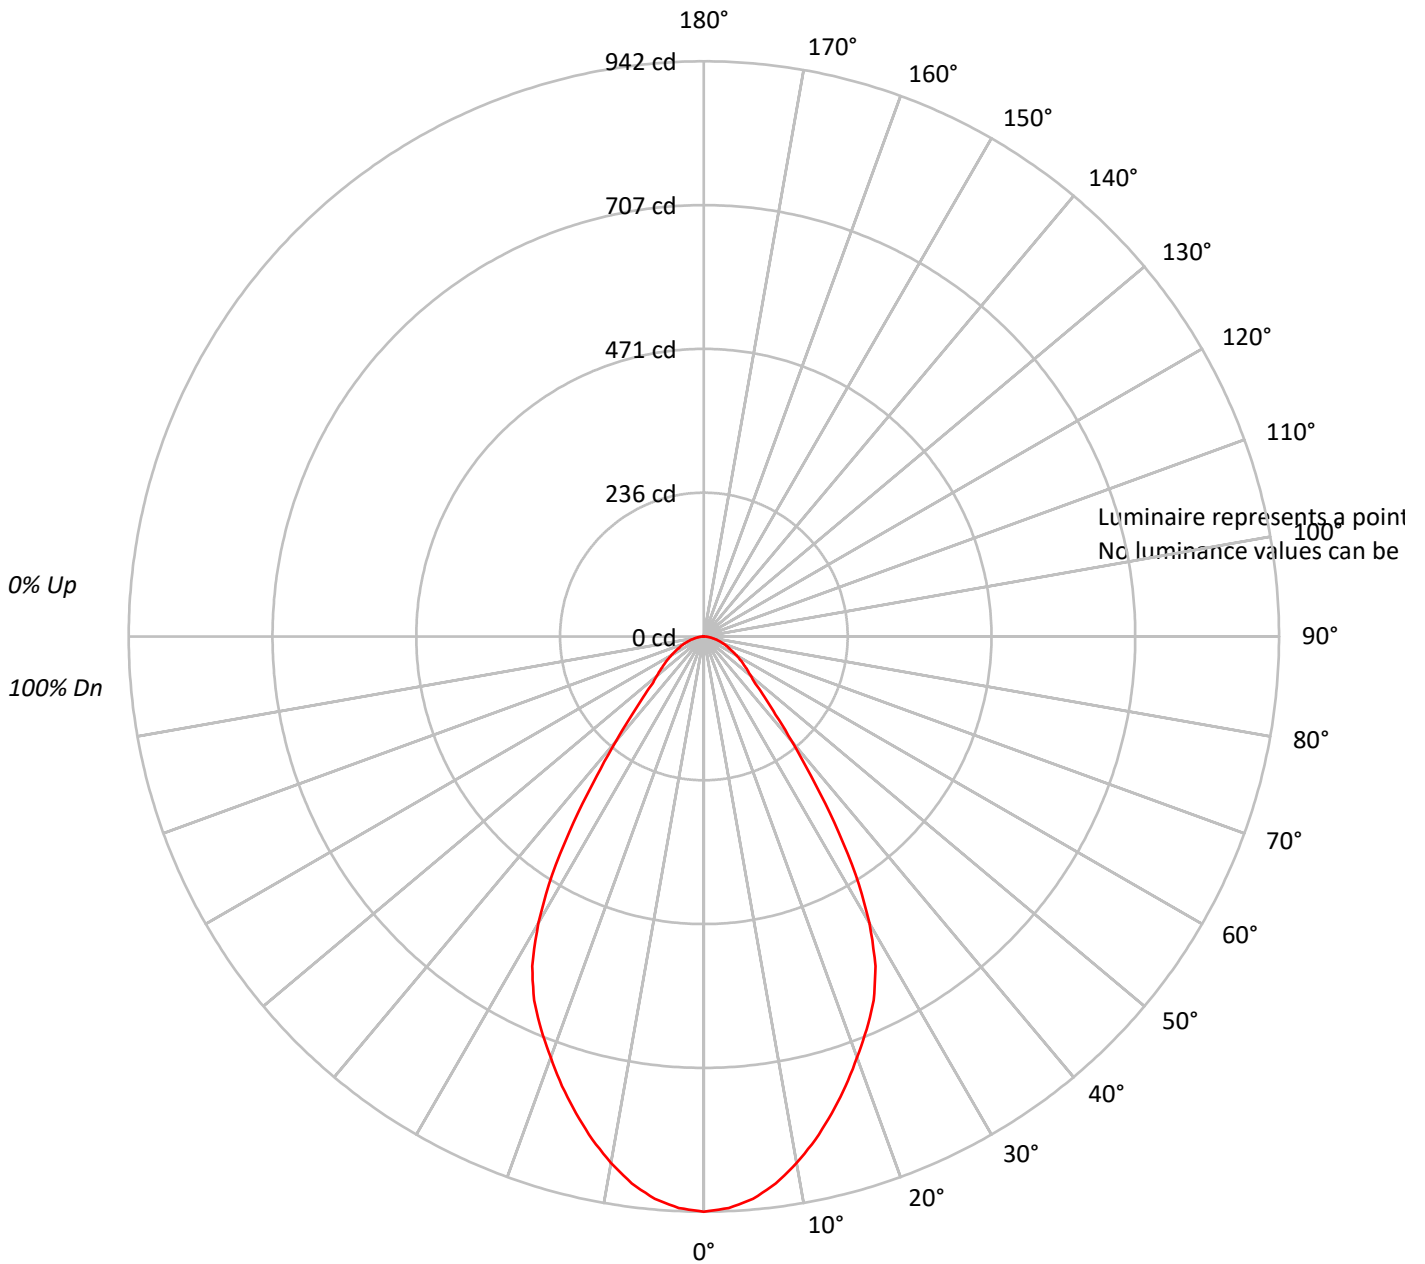



TEST NUMBER: P207966

CATALOG NUMBER: LD4B15D010 EU4B10208050 4LBNMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	105	103	109	106	104	101	102	100	98	98	97	95	95	94	92	90			
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			
3	98	90	84	80	96	89	83	79	86	82	78	84	80	76	81	78	75	73			
4	92	83	76	71	90	82	76	71	80	74	70	78	73	69	76	72	68	67			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	63	61			
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	62	57	53	52			
8	73	62	55	50	71	61	55	50	60	54	50	59	53	49	58	53	49	48			
9	69	58	51	46	68	57	51	46	56	50	46	55	50	46	54	49	46	44			
10	65	54	48	43	64	54	47	43	53	47	43	52	47	43	51	46	43	41			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207966

CATALOG NUMBER: LD4B15D010 EU4B10208050 4LBNMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.7	7.8
10°-20°	226.8	20.5
20°-30°	298.5	27.0
30°-40°	232.3	21.0
40°-50°	112.8	10.2
50°-60°	71.3	6.5
60°-70°	46.0	4.2
70°-80°	24.0	2.2
80°-90°	6.0	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	611.9	55.4
0°-40°	844.3	76.4
0°-60°	1028.4	93.1
0°-90°	1104.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1104.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	942	
5°	925	87
15°	809	227
25°	658	298
35°	372	232
45°	140	113
55°	79	71
65°	46	46
75°	23	24
85°	5	6
90°	0	



TEST NUMBER: P207966

CATALOG NUMBER: LD4B15D010 EU4B10208050 4LBNMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	942.2
2.5°	936.9
5°	924.6
7.5°	903.6
10°	875.5
12.5°	843.9
15°	808.8
17.5°	772.0
20°	733.4
22.5°	696.5
25°	657.9
27.5°	608.8
30°	542.1
32.5°	463.2
35°	372.0
37.5°	287.7
40°	222.8
42.5°	173.7
45°	140.4
47.5°	114.0
50°	100.0
52.5°	89.5
55°	79.0
57.5°	70.2
60°	61.4
62.5°	52.6
65°	45.6
67.5°	40.4
70°	33.3
72.5°	28.1
75°	22.8
77.5°	17.5
80°	12.3
82.5°	8.8
85°	5.3
87.5°	1.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)