

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P208068

Luminaire Tested: **LD4B15D010 EU4B10208050 4LBWLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P208068
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B15D010 EU4B10208050 4LBWLI1
Description: PORTFOLIO 4 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1532.9 lumens
Efficiency: N/A
Efficacy: 107.2 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P208068

CATALOG NUMBER: LD4B15D010 EU4B10208050 4LBWLI1

Luminous Intensity Polar Plot

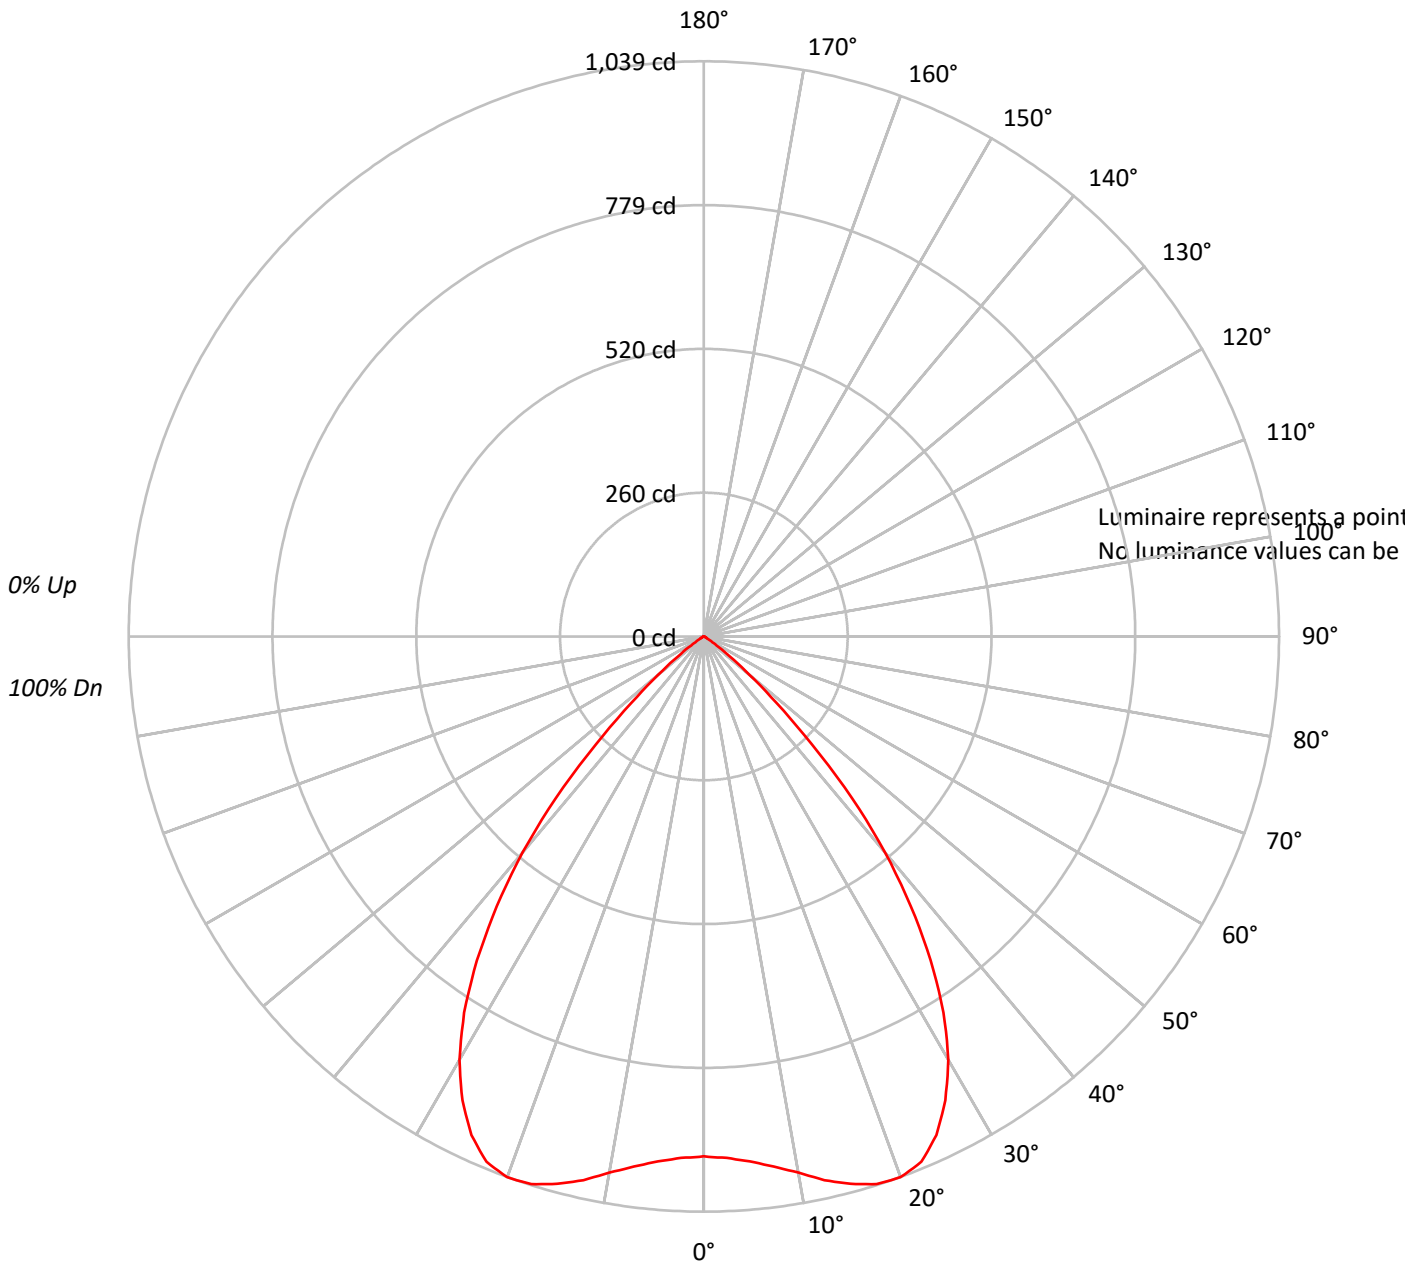



TEST NUMBER: P208068

CATALOG NUMBER: LD4B15D010 EU4B10208050 4LBWLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92				92															
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84				84															
3	100	93	87	83	98	92	86	82	89	85	81	86	83	80	84	81	78	77				77															
4	94	86	79	75	92	84	79	74	82	77	73	80	76	72	78	75	72	70				70															
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64				64															
6	83	73	66	62	82	72	66	61	71	65	61	69	64	60	68	63	60	58				58															
7	78	68	61	56	77	67	61	56	66	60	56	64	59	55	63	59	55	54				54															
8	74	63	56	52	72	62	56	51	61	55	51	60	55	51	59	54	51	49				49															
9	69	59	52	48	68	58	52	47	57	51	47	56	51	47	55	50	47	45				45															
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42				42															

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P208068

CATALOG NUMBER: LD4B15D010 EU4B10208050 4LBWLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.8	6.0
10°-20°	289.9	18.9
20°-30°	452.2	29.5
30°-40°	440.0	28.7
40°-50°	219.8	14.3
50°-60°	34.0	2.2
60°-70°	4.1	0.3
70°-80°	1.2	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	833.9	54.4
0°-40°	1273.8	83.1
0°-60°	1527.6	99.7
0°-90°	1532.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1532.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	939	
5°	952	92
15°	1024	290
25°	994	452
35°	714	440
45°	276	220
55°	28	34
65°	4	4
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P208068

CATALOG NUMBER: LD4B15D010 EU4B10208050 4LBWLI1

CANDELA DISTRIBUTION (FULL):

0°	
0°	939.2
2.5°	942.7
5°	951.5
7.5°	965.6
10°	983.1
12.5°	1005.9
15°	1023.5
17.5°	1037.5
20°	1039.3
22.5°	1027.0
25°	993.6
27.5°	944.5
30°	883.0
32.5°	805.8
35°	714.5
37.5°	614.4
40°	509.1
42.5°	396.8
45°	275.6
47.5°	177.3
50°	107.1
52.5°	57.9
55°	28.1
57.5°	12.3
60°	7.0
62.5°	5.3
65°	3.5
67.5°	3.5
70°	1.8
72.5°	1.8
75°	1.8
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)