

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P206540

Luminaire Tested: **LD4B20D010 EU4B10209030 4LBCSMMS1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P206540  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD4B20D010 EU4B10209030 4LBCSMMS1  
Description: PORTFOLIO 4 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH CAST MATTE BLACK TRIM  
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W  
DL3-21.8 6W DLE-22.46W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1525.1 lumens  
Efficiency: N/A  
Efficacy: 73.3 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.27  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P206540

CATALOG NUMBER: LD4B20D010 EU4B10209030 4LBCSMMS1

### Luminous Intensity Polar Plot

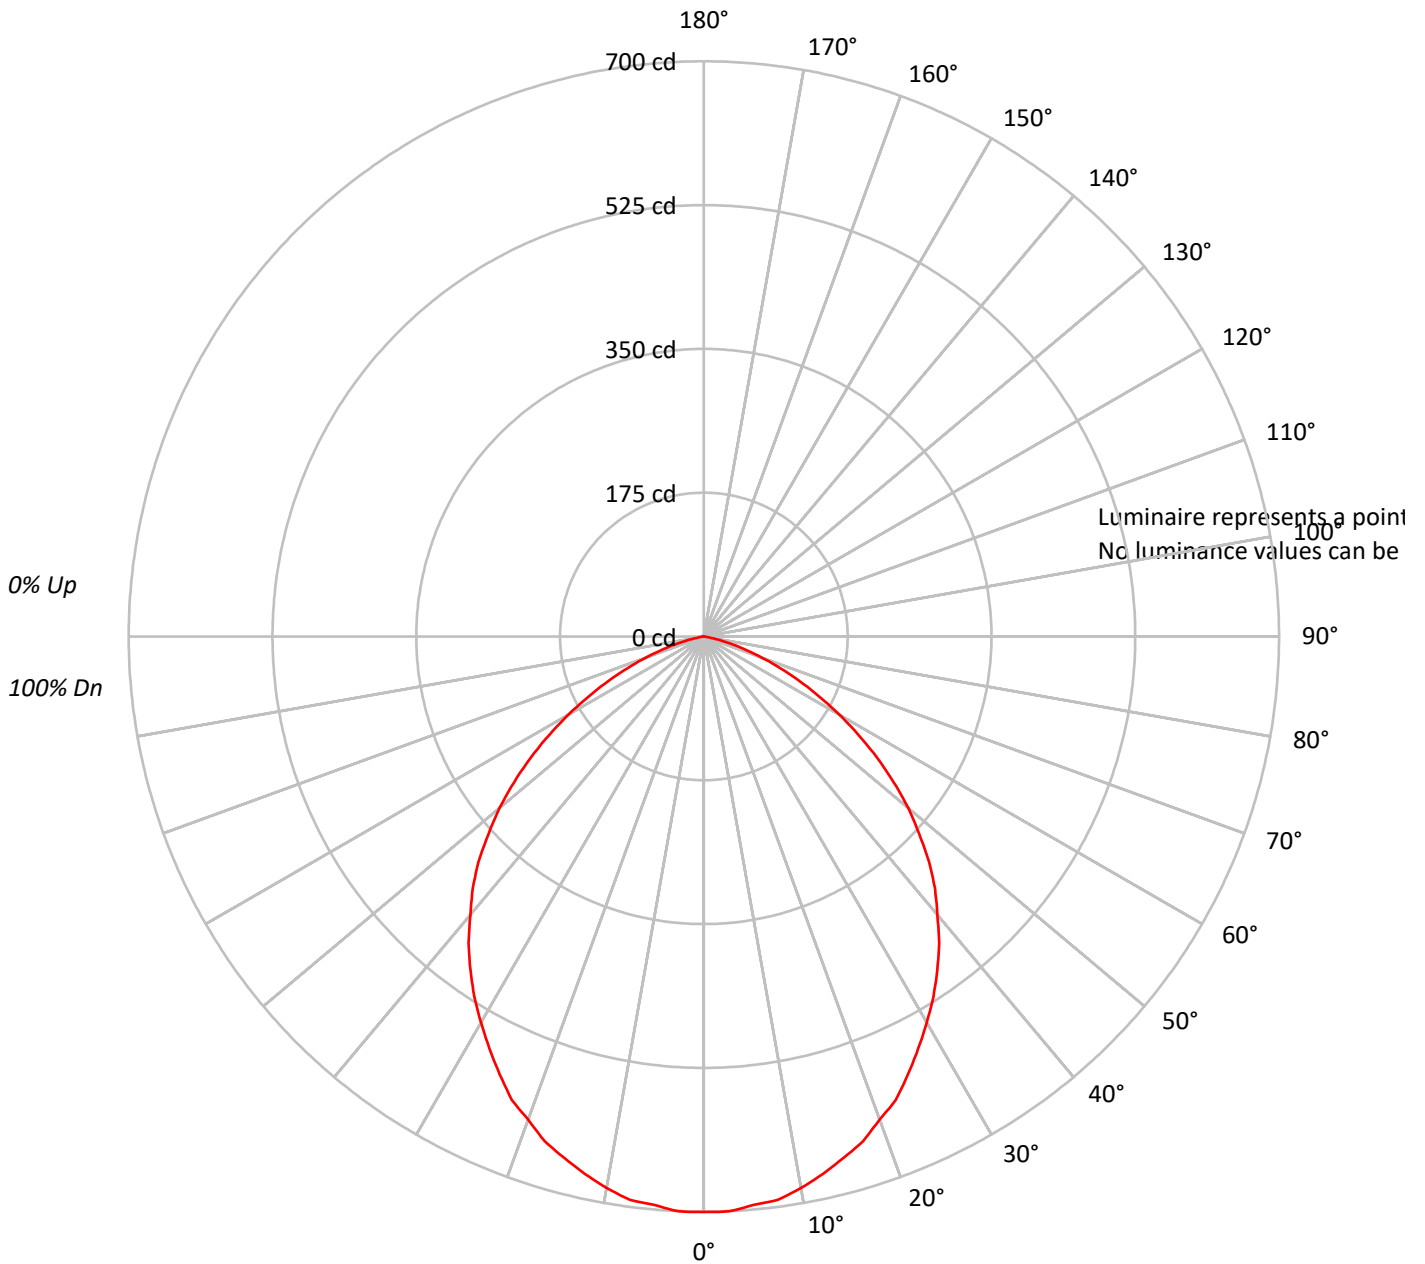



TEST NUMBER: P206540

CATALOG NUMBER: LD4B20D010 EU4B10209030 4LBCSMMS1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	103	100	108	105	101	98	100	98	95	97	94	92	93	91	90	88				88
2	102	95	89	84	99	93	88	83	90	85	81	86	83	79	83	80	78	76				76
3	94	85	77	72	92	83	76	71	80	74	70	77	73	69	75	71	67	65				65
4	87	76	68	62	84	74	67	61	72	66	61	70	64	60	68	63	59	57				57
5	80	68	60	54	78	67	59	54	65	58	53	63	57	53	61	56	52	50				50
6	74	62	54	48	72	61	53	47	59	52	47	58	51	47	56	51	46	44				44
7	69	56	48	42	67	56	48	42	54	47	42	53	46	42	51	46	41	40				40
8	64	52	44	38	63	51	43	38	50	43	38	48	42	38	47	42	37	36				36
9	60	48	40	35	59	47	40	34	46	39	34	45	39	34	44	38	34	32				32
10	57	44	36	31	55	43	36	31	43	36	31	42	35	31	41	35	31	29				29

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P206540

CATALOG NUMBER: LD4B20D010 EU4B10209030 4LBCSMMS1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	66.0	4.3
10°-20°	185.2	12.1
20°-30°	270.5	17.7
30°-40°	309.4	20.3
40°-50°	297.3	19.5
50°-60°	229.6	15.1
60°-70°	128.1	8.4
70°-80°	37.3	2.4
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	521.7	34.2
0°-40°	831.1	54.5
0°-60°	1358.0	89.0
0°-90°	1525.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1525.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	700	
5°	694	66
15°	657	185
25°	588	270
35°	495	309
45°	388	297
55°	258	230
65°	128	128
75°	33	37
85°	1	2
90°	0	



TEST NUMBER: P206540

CATALOG NUMBER: LD4B20D010 EU4B10209030 4LBCSMMS1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	700.4
2.5°	700.4
5°	694.4
7.5°	691.5
10°	681.6
12.5°	669.8
15°	657.0
17.5°	644.1
20°	625.4
22.5°	610.6
25°	587.9
27.5°	565.2
30°	542.5
32.5°	519.8
35°	495.2
37.5°	470.5
40°	441.9
42.5°	416.3
45°	387.7
47.5°	355.1
50°	324.5
52.5°	291.0
55°	257.5
57.5°	222.9
60°	190.4
62.5°	157.8
65°	128.2
67.5°	100.6
70°	75.0
72.5°	52.3
75°	32.6
77.5°	16.8
80°	5.9
82.5°	2.0
85°	1.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)