

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207979

Luminaire Tested: **LD4B20D010 EU4B10208050 4LBNMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P207979  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD4B20D010 EU4B10208050 4LBNMW1  
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
NARROW DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W  
DL3-21.8 6W DLE-22.46W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1496.0 lumens  
Efficiency: N/A  
Efficacy: 71.9 lumens/watt  
Spacing Criteria (0/90/45): 0.96 / 0.96 / 0.95  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P207979

CATALOG NUMBER: LD4B20D010 EU4B10208050 4LBNMW1

### Luminous Intensity Polar Plot

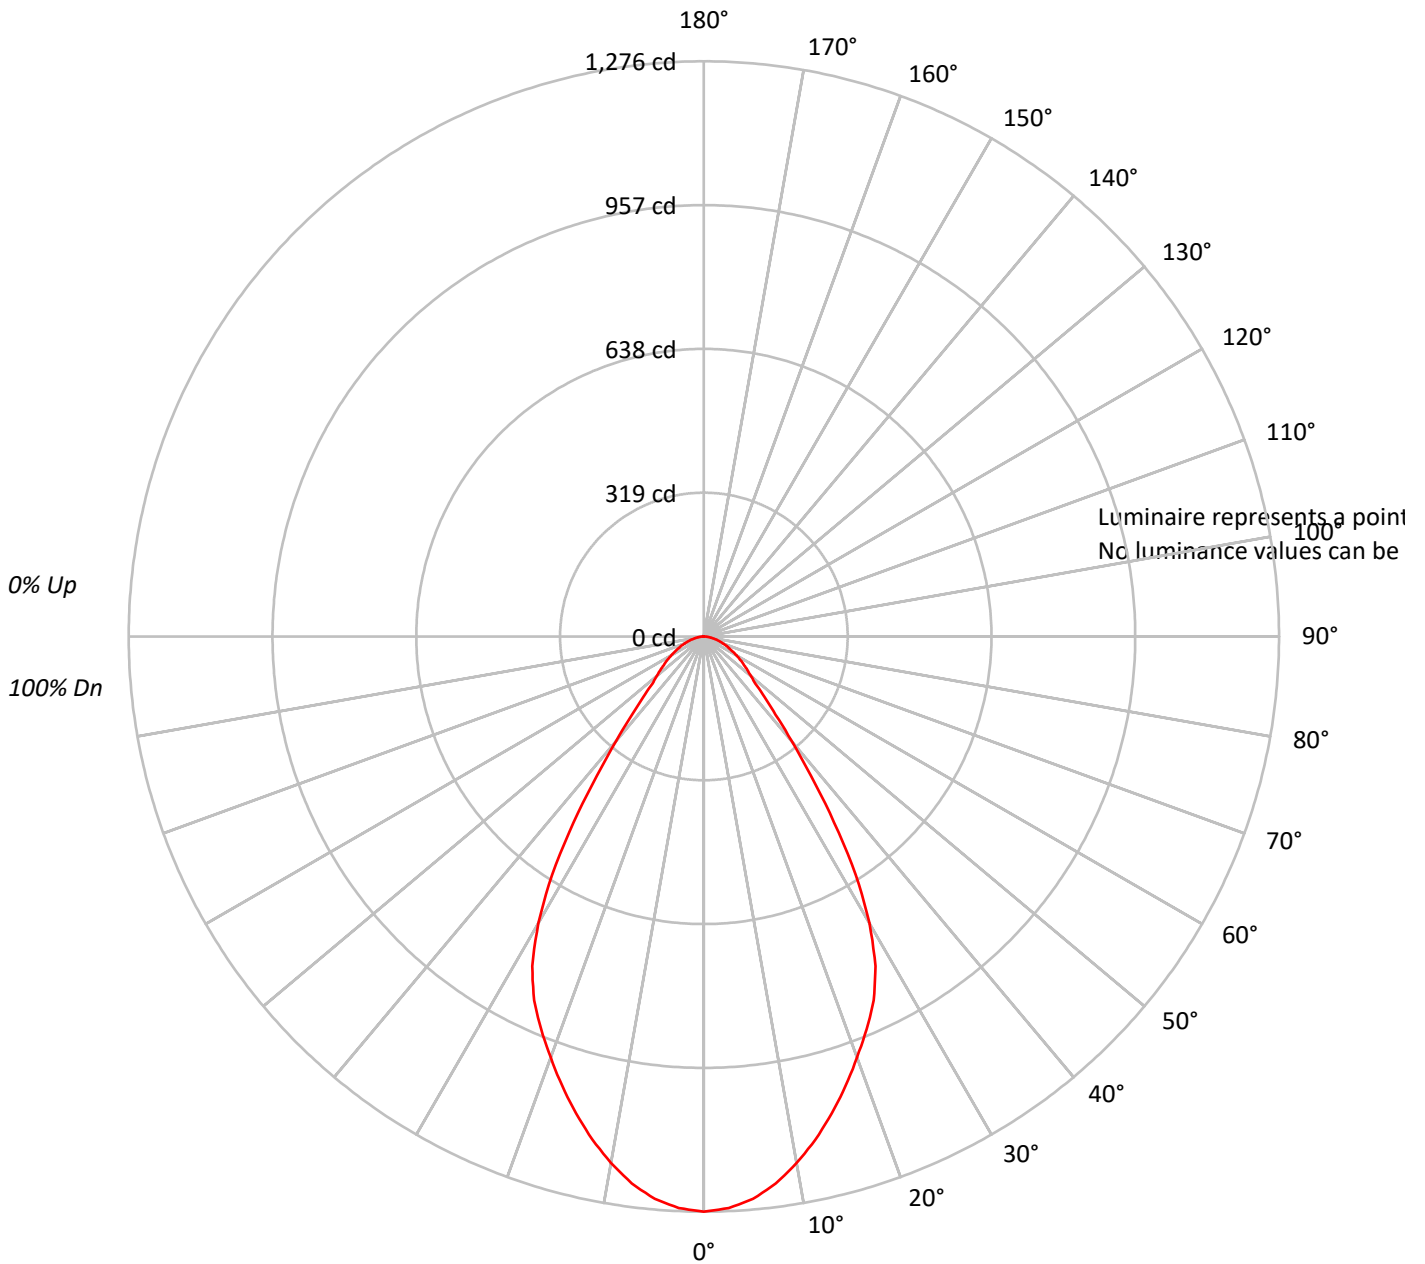



TEST NUMBER: P207979

CATALOG NUMBER: LD4B20D010 EU4B10208050 4LBNMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	105	103	109	106	104	101	102	100	98	98	97	95	95	94	92	90			
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			
3	98	90	84	80	96	89	83	79	86	82	78	84	80	76	81	78	75	73			
4	92	83	76	71	90	82	76	71	80	74	70	78	73	69	76	72	68	67			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	63	61			
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	62	57	53	52			
8	73	62	55	50	71	61	55	50	60	54	50	59	53	49	58	53	49	48			
9	69	58	51	46	68	57	51	46	56	50	46	55	50	46	54	49	46	44			
10	65	54	48	43	64	54	47	43	53	47	43	52	47	43	51	46	43	41			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P207979

CATALOG NUMBER: LD4B20D010 EU4B10208050 4LBNMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	117.4	7.8
10°-20°	307.2	20.5
20°-30°	404.3	27.0
30°-40°	314.7	21.0
40°-50°	152.9	10.2
50°-60°	96.6	6.5
60°-70°	62.3	4.2
70°-80°	32.6	2.2
80°-90°	8.1	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	828.9	55.4
0°-40°	1143.6	76.4
0°-60°	1393.0	93.1
0°-90°	1496.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1496.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1276	
5°	1252	117
15°	1096	307
25°	891	404
35°	504	315
45°	190	153
55°	107	97
65°	62	62
75°	31	33
85°	7	8
90°	0	



TEST NUMBER: P207979

CATALOG NUMBER: LD4B20D010 EU4B10208050 4LBNMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1276.1
2.5°	1269.0
5°	1252.4
7.5°	1223.9
10°	1185.8
12.5°	1143.1
15°	1095.5
17.5°	1045.6
20°	993.3
22.5°	943.4
25°	891.2
27.5°	824.6
30°	734.3
32.5°	627.4
35°	503.8
37.5°	389.7
40°	301.8
42.5°	235.3
45°	190.1
47.5°	154.5
50°	135.5
52.5°	121.2
55°	106.9
57.5°	95.1
60°	83.2
62.5°	71.3
65°	61.8
67.5°	54.7
70°	45.2
72.5°	38.0
75°	30.9
77.5°	23.8
80°	16.6
82.5°	11.9
85°	7.1
87.5°	2.4
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)