

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207161

Luminaire Tested: **LD4B20D010 EU4B10209050 4LBMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207161
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B20D010 EU4B10209050 4LBMH1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W
DL3-21.8 6W DLE-22.46W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1327.1 lumens
Efficiency: N/A
Efficacy: 63.8 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207161

CATALOG NUMBER: LD4B20D010 EU4B10209050 4LBMH1

Luminous Intensity Polar Plot

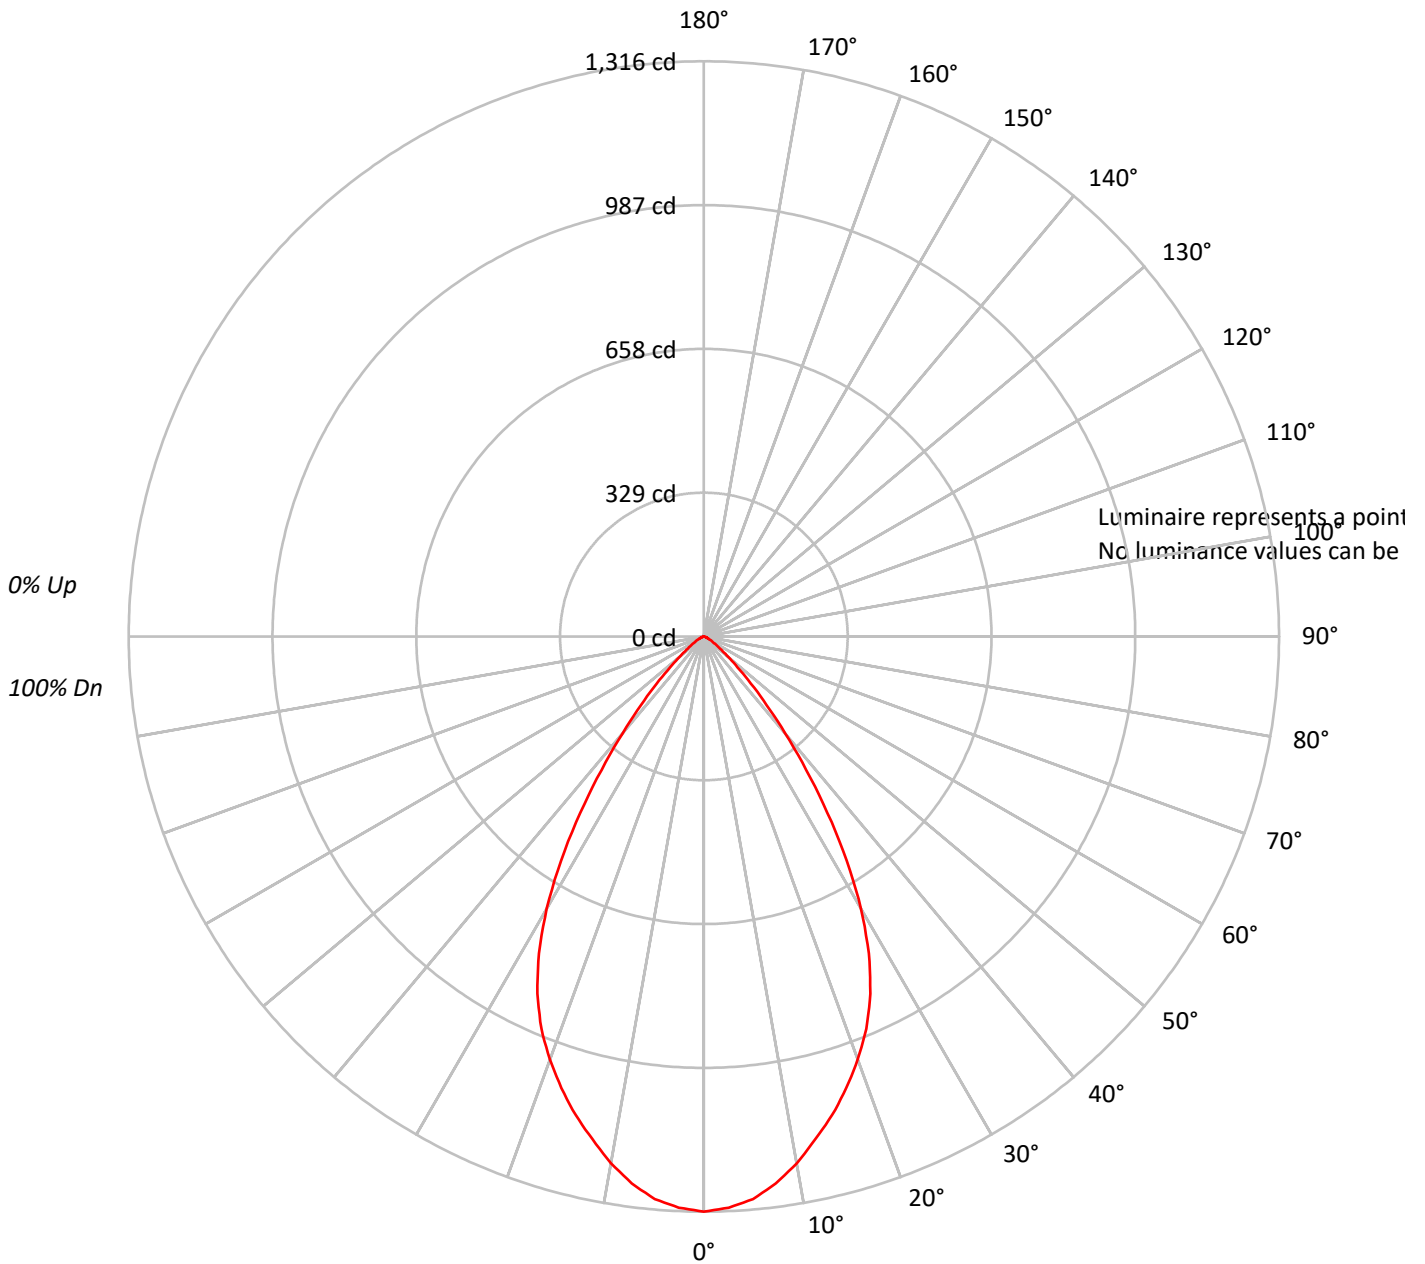



TEST NUMBER: P207161

CATALOG NUMBER: LD4B20D010 EU4B10209050 4LBMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79	79	79	79
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	73	73	73	73
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67	67	67	67
6	86	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62	62	62	62
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58	58	58	58
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54	54	54	54
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50	50	50	50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47	47	47	47

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207161

CATALOG NUMBER: LD4B20D010 EU4B10209050 4LBMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.1	9.1
10°-20°	317.7	23.9
20°-30°	408.3	30.8
30°-40°	307.2	23.1
40°-50°	123.4	9.3
50°-60°	35.1	2.6
60°-70°	11.1	0.8
70°-80°	3.2	0.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	847.0	63.8
0°-40°	1154.2	87.0
0°-60°	1312.6	98.9
0°-90°	1327.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1327.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1316	
5°	1292	121
15°	1134	318
25°	901	408
35°	493	307
45°	152	123
55°	36	35
65°	10	11
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P207161

CATALOG NUMBER: LD4B20D010 EU4B10209050 4LBMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1316.0
2.5°	1308.0
5°	1292.0
7.5°	1261.9
10°	1223.8
12.5°	1177.8
15°	1133.7
17.5°	1083.6
20°	1029.6
22.5°	971.5
25°	901.4
27.5°	817.2
30°	719.1
32.5°	608.9
35°	492.7
37.5°	384.6
40°	288.4
42.5°	212.3
45°	152.2
47.5°	104.2
50°	72.1
52.5°	50.1
55°	36.1
57.5°	26.0
60°	20.0
62.5°	14.0
65°	10.0
67.5°	8.0
70°	6.0
72.5°	4.0
75°	2.0
77.5°	2.0
80°	2.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)