

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P252094

Luminaire Tested: **LD4B30D010 EU4B30509024 4LBBA1MB**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P252094  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1712-453-4)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD4B30D010 EU4B30509024 4LBBA1MB  
Description: PORTFOLIO 4 INCH BAFFLE RECESSED DOWNLIGHT, WITH MATTE BLACK TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1054.0 lumens  
Efficiency: N/A  
Efficacy: 37.6 lumens/watt  
Spacing Criteria (0/90/45): 1.04 / 1.04 / 0.94  
Luminous Opening: Circular (Dia: 0.38' x H: 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P252094

CATALOG NUMBER: LD4B30D010 EU4B30509024 4LBBA1MB

### Luminous Intensity Polar Plot

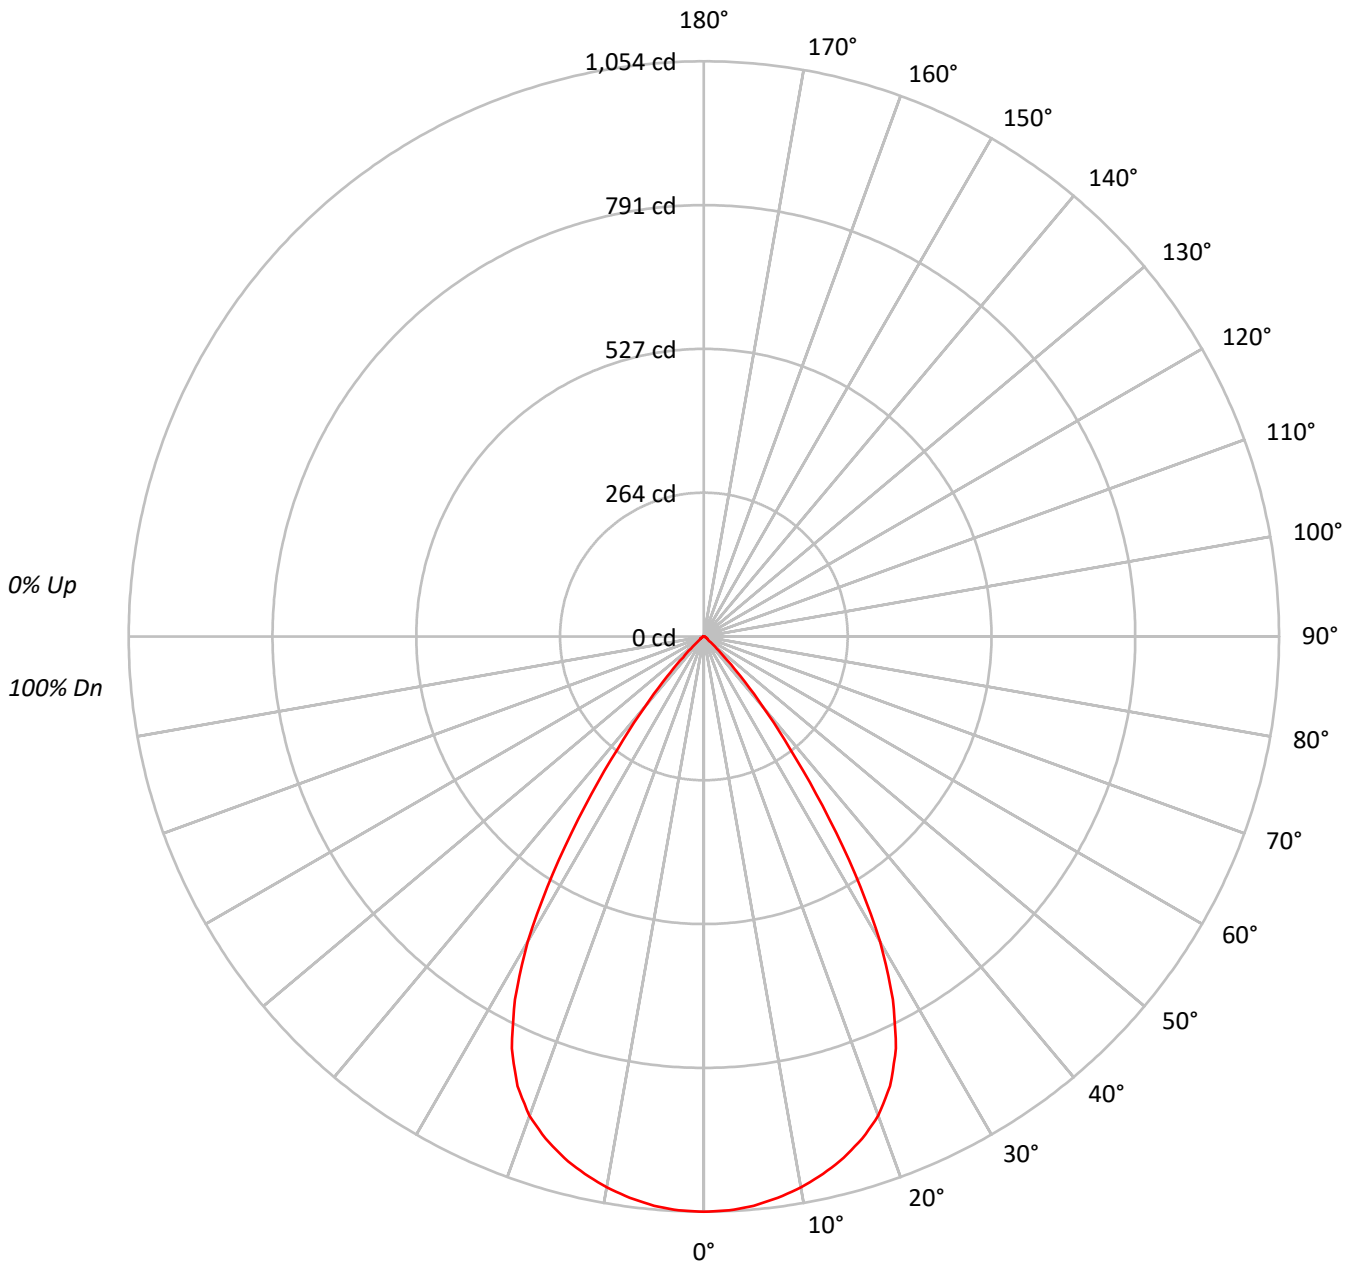



TEST NUMBER: P252094

CATALOG NUMBER: LD4B30D010 EU4B30509024 4LBBA1MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	88	83	79	86	82	78	84	81	77	82	79	77	75			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70			
6	88	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65			
7	83	74	68	63	82	73	67	63	72	67	63	71	66	63	69	65	62	61			
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	61	58	57			
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53			
10	72	62	56	52	71	61	56	52	60	55	52	60	55	52	59	55	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	102731
5°	102448
10°	101455
15°	99827
20°	96909
25°	89532
30°	72630
35°	45020
40°	21183
45°	7401
50°	2092
55°	1410
60°	1072
65°	945
70°	798
75°	527
80°	786
85°	0



TEST NUMBER: P252094

CATALOG NUMBER: LD4B30D010 EU4B30509024 4LBBA1MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	99.2	9.4
10°-20°	278.1	26.4
20°-30°	373.8	35.5
30°-40°	238.8	22.7
40°-50°	50.8	4.8
50°-60°	7.7	0.7
60°-70°	3.7	0.4
70°-80°	1.7	0.2
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	751.2	71.3
0°-40°	990.0	93.9
0°-60°	1048.4	99.5
0°-90°	1054.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1054.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1054	
5°	1047	99
15°	989	278
25°	833	374
35°	378	239
45°	54	51
55°	8	8
65°	4	4
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P252094

CATALOG NUMBER: LD4B30D010 EU4B30509024 4LBBA1MB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1054.1
2.5°	1052.7
5°	1047.2
7.5°	1037.6
10°	1025.2
12.5°	1008.7
15°	989.4
17.5°	964.7
20°	934.4
22.5°	891.7
25°	832.6
27.5°	750.0
30°	645.4
32.5°	516.0
35°	378.4
37.5°	258.7
40°	166.5
42.5°	99.1
45°	53.7
47.5°	27.5
50°	13.8
52.5°	9.6
55°	8.3
57.5°	6.9
60°	5.5
62.5°	4.1
65°	4.1
67.5°	2.8
70°	2.8
72.5°	1.4
75°	1.4
77.5°	1.4
80°	1.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)