

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P206449

Luminaire Tested: **LD4B30D010 EU4B30509027 4LBCSMB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P206449
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B30D010 EU4B30509027 4LBCSMB1
Description: PORTFOLIO 4 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE METALLIC SILVER TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2342.1 lumens
Efficiency: N/A
Efficacy: 83.6 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P206449

CATALOG NUMBER: LD4B30D010 EU4B30509027 4LBCSMB1

Luminous Intensity Polar Plot

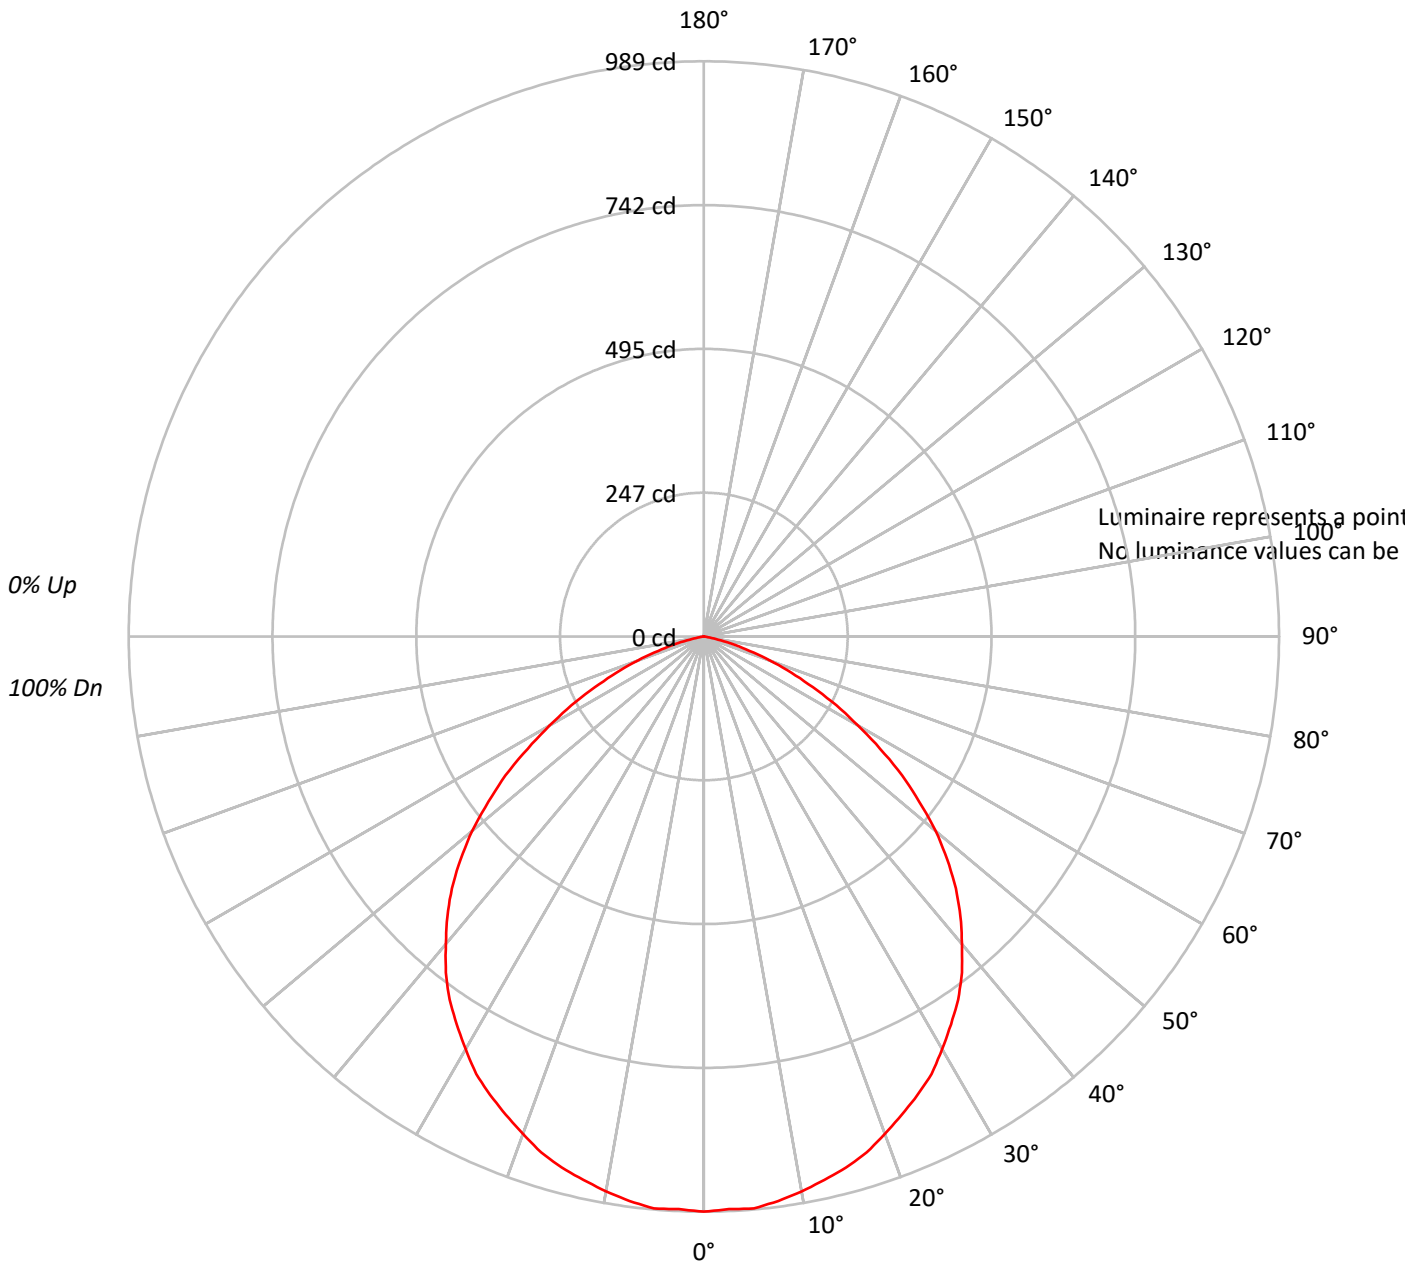



TEST NUMBER: P206449

CATALOG NUMBER: LD4B30D010 EU4B30509027 4LBCSMB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	90	88				88
2	102	95	89	84	99	93	87	83	89	85	81	86	82	79	83	80	77	75				75
3	93	84	77	71	91	83	76	70	80	74	69	77	72	68	74	70	67	65				65
4	86	75	67	61	84	74	66	61	71	65	60	69	63	59	67	62	58	56				56
5	79	67	59	53	77	66	59	53	64	57	52	62	56	52	61	55	51	49				49
6	74	61	53	47	72	60	52	46	58	51	46	57	50	46	55	50	45	43				43
7	68	55	47	41	67	55	47	41	53	46	41	52	45	41	50	45	40	39				39
8	64	51	43	37	62	50	42	37	49	42	37	48	41	37	46	41	36	35				35
9	60	47	39	33	58	46	39	33	45	38	33	44	38	33	43	37	33	31				31
10	56	43	35	30	55	43	35	30	42	35	30	41	34	30	40	34	30	28				28

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P206449

CATALOG NUMBER: LD4B30D010 EU4B30509027 4LBCSMB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	93.5	4.0
10°-20°	266.5	11.4
20°-30°	400.6	17.1
30°-40°	475.3	20.3
40°-50°	470.4	20.1
50°-60°	369.5	15.8
60°-70°	207.2	8.8
70°-80°	58.2	2.5
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	760.6	32.5
0°-40°	1236.0	52.8
0°-60°	2075.8	88.6
0°-90°	2342.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2342.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	989	
5°	987	94
15°	945	266
25°	870	401
35°	762	475
45°	613	470
55°	416	369
65°	206	207
75°	50	58
85°	0	1
90°	0	



TEST NUMBER: P206449

CATALOG NUMBER: LD4B30D010 EU4B30509027 4LBCSMB1

CANDELA DISTRIBUTION (FULL):

0°	
0°	988.9
2.5°	985.6
5°	987.3
7.5°	978.9
10°	968.8
12.5°	957.0
15°	945.3
17.5°	930.2
20°	910.0
22.5°	889.9
25°	869.7
27.5°	847.9
30°	819.4
32.5°	790.8
35°	762.3
37.5°	728.7
40°	690.1
42.5°	653.1
45°	612.8
47.5°	567.5
50°	520.5
52.5°	466.8
55°	416.4
57.5°	359.3
60°	305.6
62.5°	256.9
65°	206.5
67.5°	162.9
70°	120.9
72.5°	82.3
75°	50.4
77.5°	25.2
80°	6.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)