

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207268

Luminaire Tested: **LD4B30D010 EU4B30508030 4LBMWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207268
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B30D010 EU4B30508030 4LBMWH1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2240.8 lumens
Efficiency: N/A
Efficacy: 80.0 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.87
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207268

CATALOG NUMBER: LD4B30D010 EU4B30508030 4LBMWH1

Luminous Intensity Polar Plot

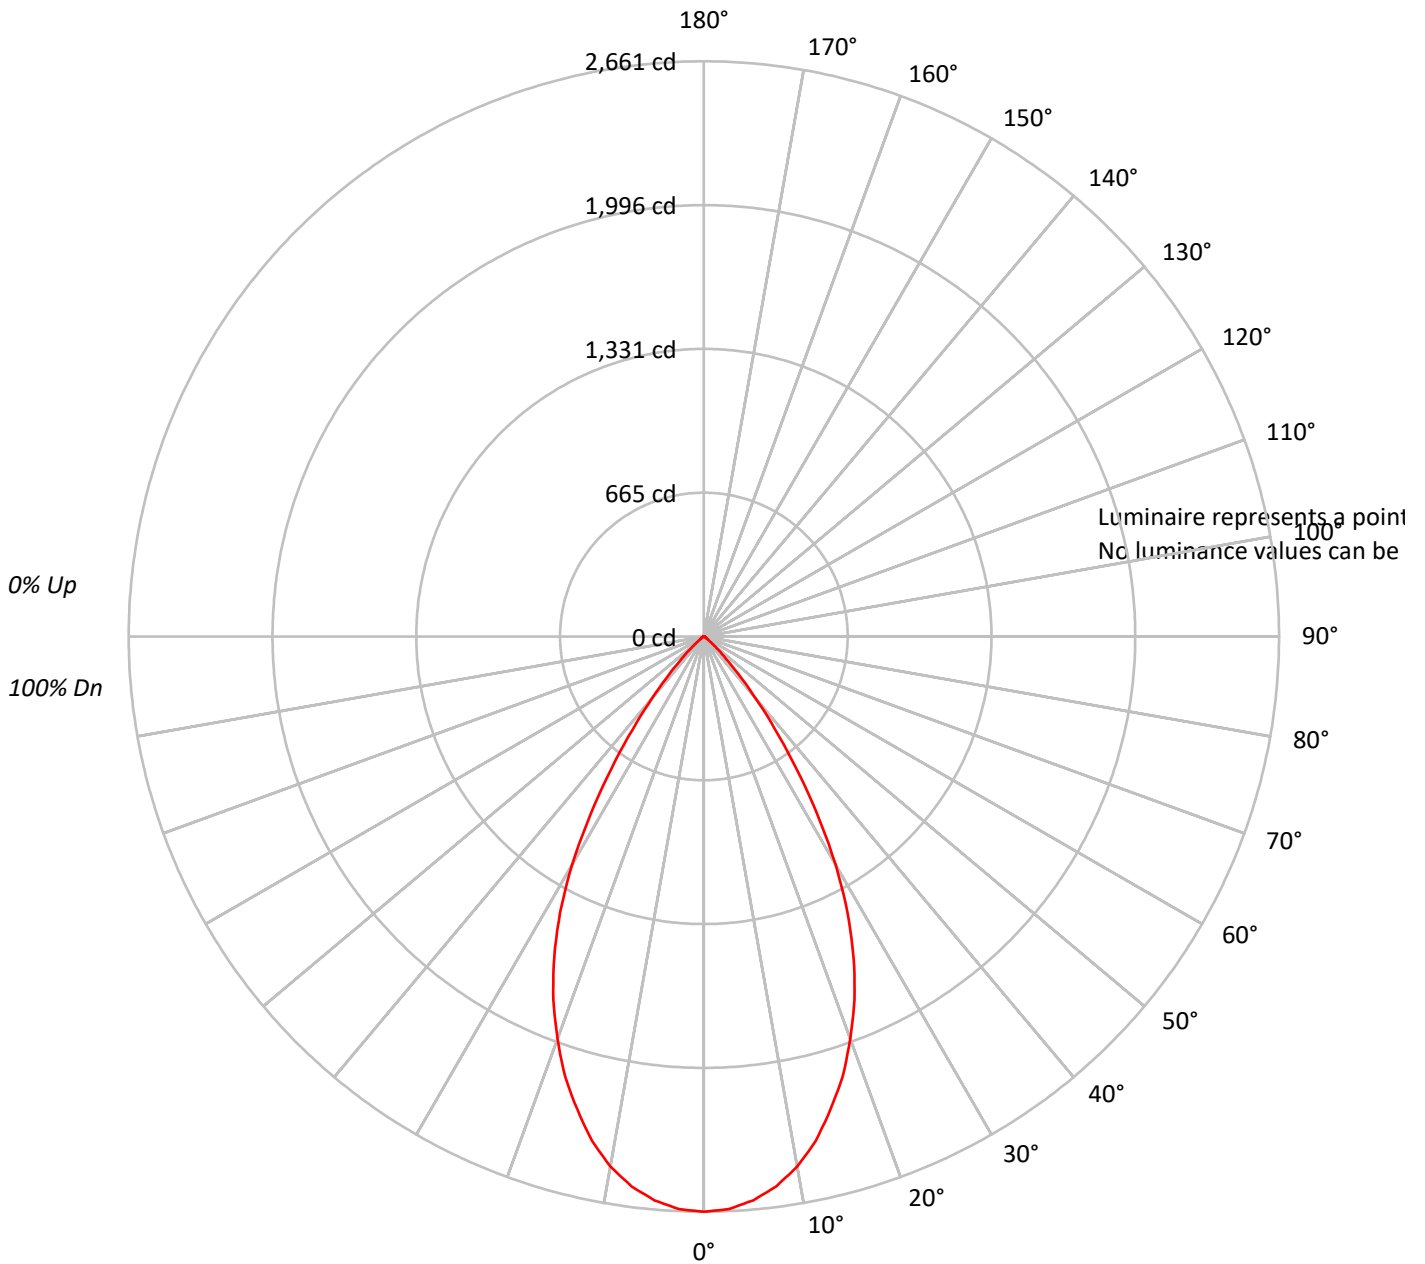



TEST NUMBER: P207268

CATALOG NUMBER: LD4B30D010 EU4B30508030 4LBMWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	108	106	111	109	106	105	105	103	101	101	100	98	98	96	95	94		
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87		
3	103	96	91	88	101	95	90	87	92	89	85	90	87	84	88	85	83	81		
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76		
5	93	84	79	74	91	84	78	74	82	77	73	80	76	73	79	75	72	71		
6	88	79	73	69	87	79	73	69	77	72	68	76	71	68	74	71	68	66		
7	84	75	69	65	82	74	68	64	73	68	64	72	67	64	70	66	63	62		
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	59	58		
9	76	66	61	57	75	66	60	57	65	60	56	64	60	56	63	59	56	55		
10	73	63	57	53	72	62	57	53	62	57	53	61	56	53	60	56	53	52		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207268

CATALOG NUMBER: LD4B30D010 EU4B30508030 4LBMWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	245.9	11.0
10°-20°	632.1	28.2
20°-30°	741.6	33.1
30°-40°	469.3	20.9
40°-50°	125.7	5.6
50°-60°	17.6	0.8
60°-70°	6.5	0.3
70°-80°	2.2	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1619.5	72.3
0°-40°	2088.9	93.2
0°-60°	2232.1	99.6
0°-90°	2240.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2240.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2661	
5°	2618	246
15°	2264	632
25°	1638	742
35°	745	469
45°	142	126
55°	17	18
65°	7	6
75°	3	2
85°	0	0
90°	0	



TEST NUMBER: P207268

CATALOG NUMBER: LD4B30D010 EU4B30508030 4LBMWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2661.3
2.5°	2651.4
5°	2618.3
7.5°	2565.3
10°	2489.2
12.5°	2389.9
15°	2264.1
17.5°	2135.0
20°	1979.4
22.5°	1820.5
25°	1638.5
27.5°	1439.9
30°	1218.1
32.5°	976.5
35°	744.8
37.5°	539.5
40°	370.7
42.5°	238.3
45°	142.3
47.5°	79.4
50°	43.0
52.5°	23.2
55°	16.6
57.5°	13.2
60°	9.9
62.5°	9.9
65°	6.6
67.5°	3.3
70°	3.3
72.5°	3.3
75°	3.3
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)