

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P205613

Luminaire Tested: **LD4B30D010 EU4B30508030 4LBSWMH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205613  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD4B30D010 EU4B30508030 4LBSWMH1  
Description: PORTFOLIO 4 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH WARM HAZE TRIM  
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W  
DL3-29.67W DLE-29.73W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2905.7 lumens  
Efficiency: N/A  
Efficacy: 103.8 lumens/watt  
Spacing Criteria (0/90/45): 0.99 / 0.99 / 1.08  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205613

CATALOG NUMBER: LD4B30D010 EU4B30508030 4LBSWMH1

### Luminous Intensity Polar Plot

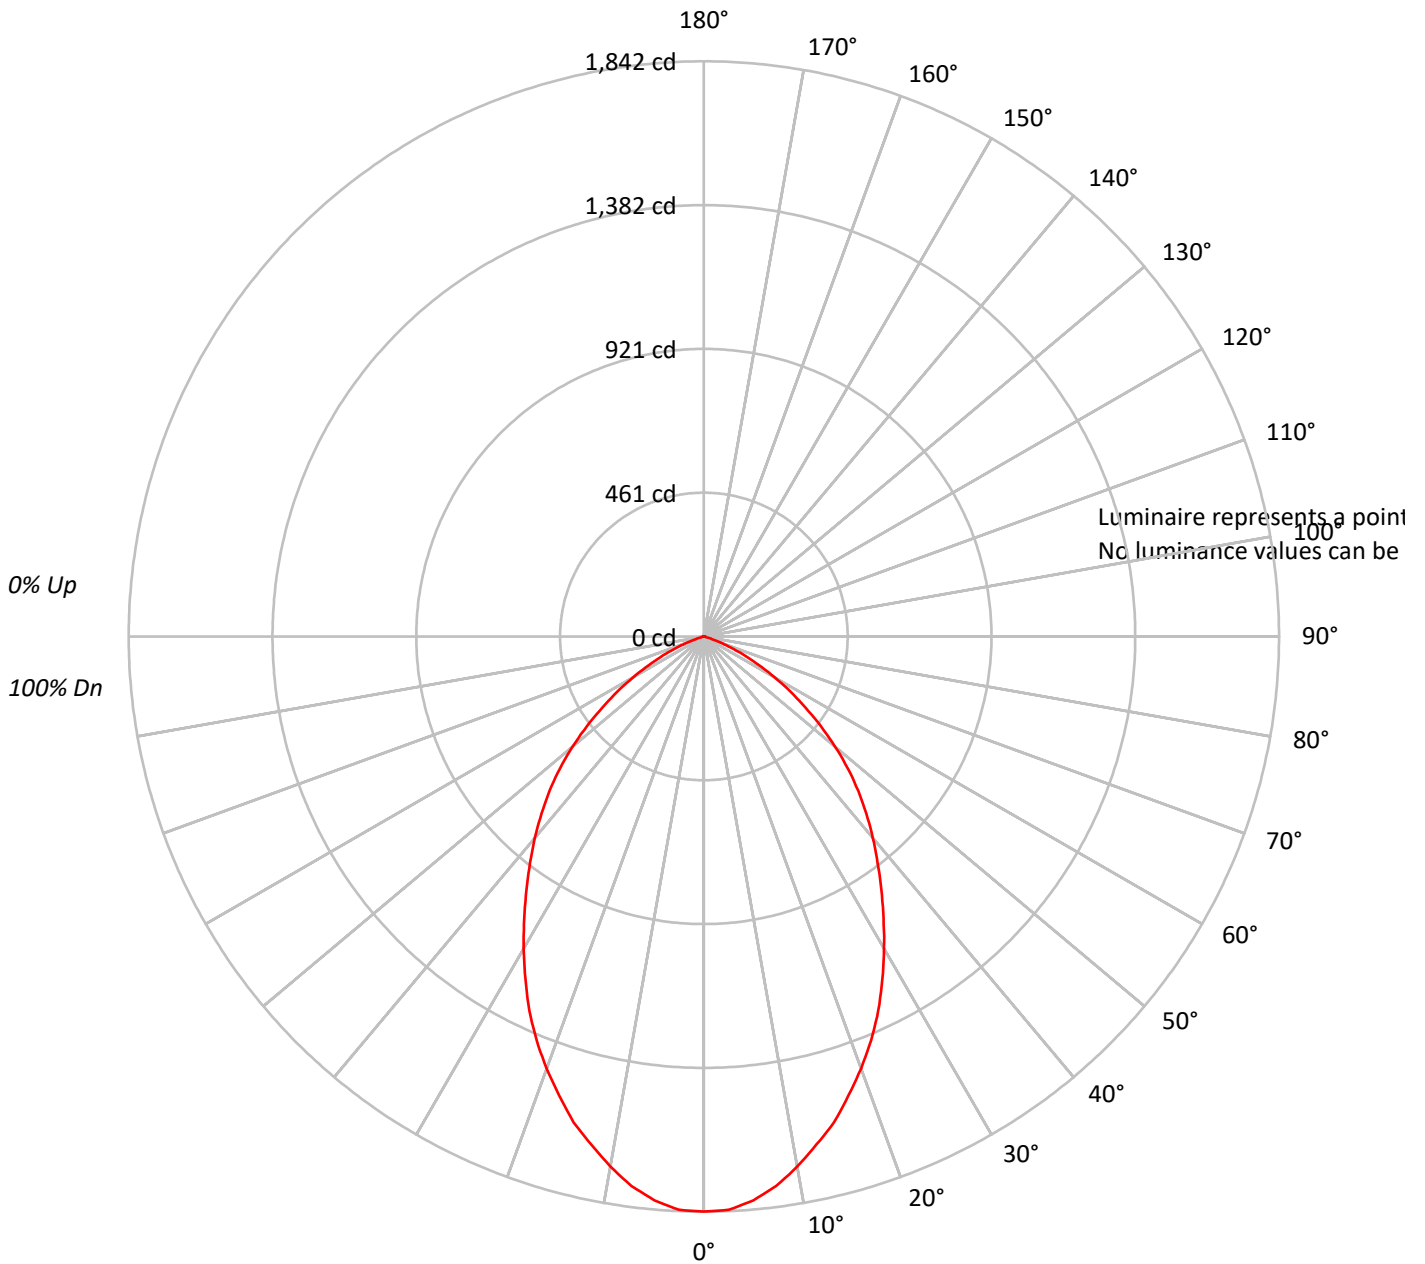



TEST NUMBER: P205613

CATALOG NUMBER: LD4B30D010 EU4B30508030 4LBSWMH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	108	105	102	109	106	103	101	102	100	97	98	96	94	95	93	92	90		
2	104	98	92	88	102	96	91	87	92	88	85	89	86	83	86	84	81	79		
3	96	88	82	76	94	87	81	76	84	79	74	81	77	73	79	75	72	70		
4	90	80	73	67	88	79	72	67	76	70	66	74	69	65	72	68	64	62		
5	83	73	65	59	82	72	64	59	70	63	59	68	62	58	66	61	57	56		
6	78	66	59	53	76	65	58	53	64	57	53	62	57	52	61	56	52	50		
7	73	61	53	48	71	60	53	48	59	52	48	57	52	47	56	51	47	45		
8	68	56	49	44	67	56	48	43	54	48	43	53	47	43	52	47	43	41		
9	64	52	45	40	63	52	45	40	50	44	40	49	44	39	49	43	39	38		
10	60	48	41	37	59	48	41	37	47	41	36	46	40	36	45	40	36	35		

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P205613

CATALOG NUMBER: LD4B30D010 EU4B30508030 4LBSWMH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	170.2	5.9
10°-20°	451.1	15.5
20°-30°	605.8	20.8
30°-40°	620.1	21.3
40°-50°	536.7	18.5
50°-60°	357.0	12.3
60°-70°	146.6	5.0
70°-80°	17.4	0.6
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1227.1	42.2
0°-40°	1847.1	63.6
0°-60°	2740.9	94.3
0°-90°	2905.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2905.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1842	
5°	1813	170
15°	1611	451
25°	1322	606
35°	990	620
45°	699	537
55°	396	357
65°	145	147
75°	8	17
85°	0	1
90°	0	



TEST NUMBER: P205613

CATALOG NUMBER: LD4B30D010 EU4B30508030 4LBSWMH1

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1841.6
2.5°	1837.8
5°	1813.0
7.5°	1774.9
10°	1723.5
12.5°	1666.4
15°	1611.2
17.5°	1540.7
20°	1472.1
22.5°	1399.8
25°	1321.7
27.5°	1237.9
30°	1154.1
32.5°	1070.3
35°	990.3
37.5°	914.1
40°	841.8
42.5°	769.4
45°	698.9
47.5°	624.7
50°	548.5
52.5°	472.3
55°	396.1
57.5°	329.5
60°	260.9
62.5°	198.1
65°	144.7
67.5°	95.2
70°	55.2
72.5°	26.7
75°	7.6
77.5°	3.8
80°	1.9
82.5°	1.9
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)