

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P206348

Luminaire Tested: **LD4B30D010 EU4B30509035 4LBCSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P206348
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B30D010 EU4B30509035 4LBCSMW1
Description: PORTFOLIO 4 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2637.8 lumens
Efficiency: N/A
Efficacy: 94.2 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P206348

CATALOG NUMBER: LD4B30D010 EU4B30509035 4LBCSMW1

Luminous Intensity Polar Plot

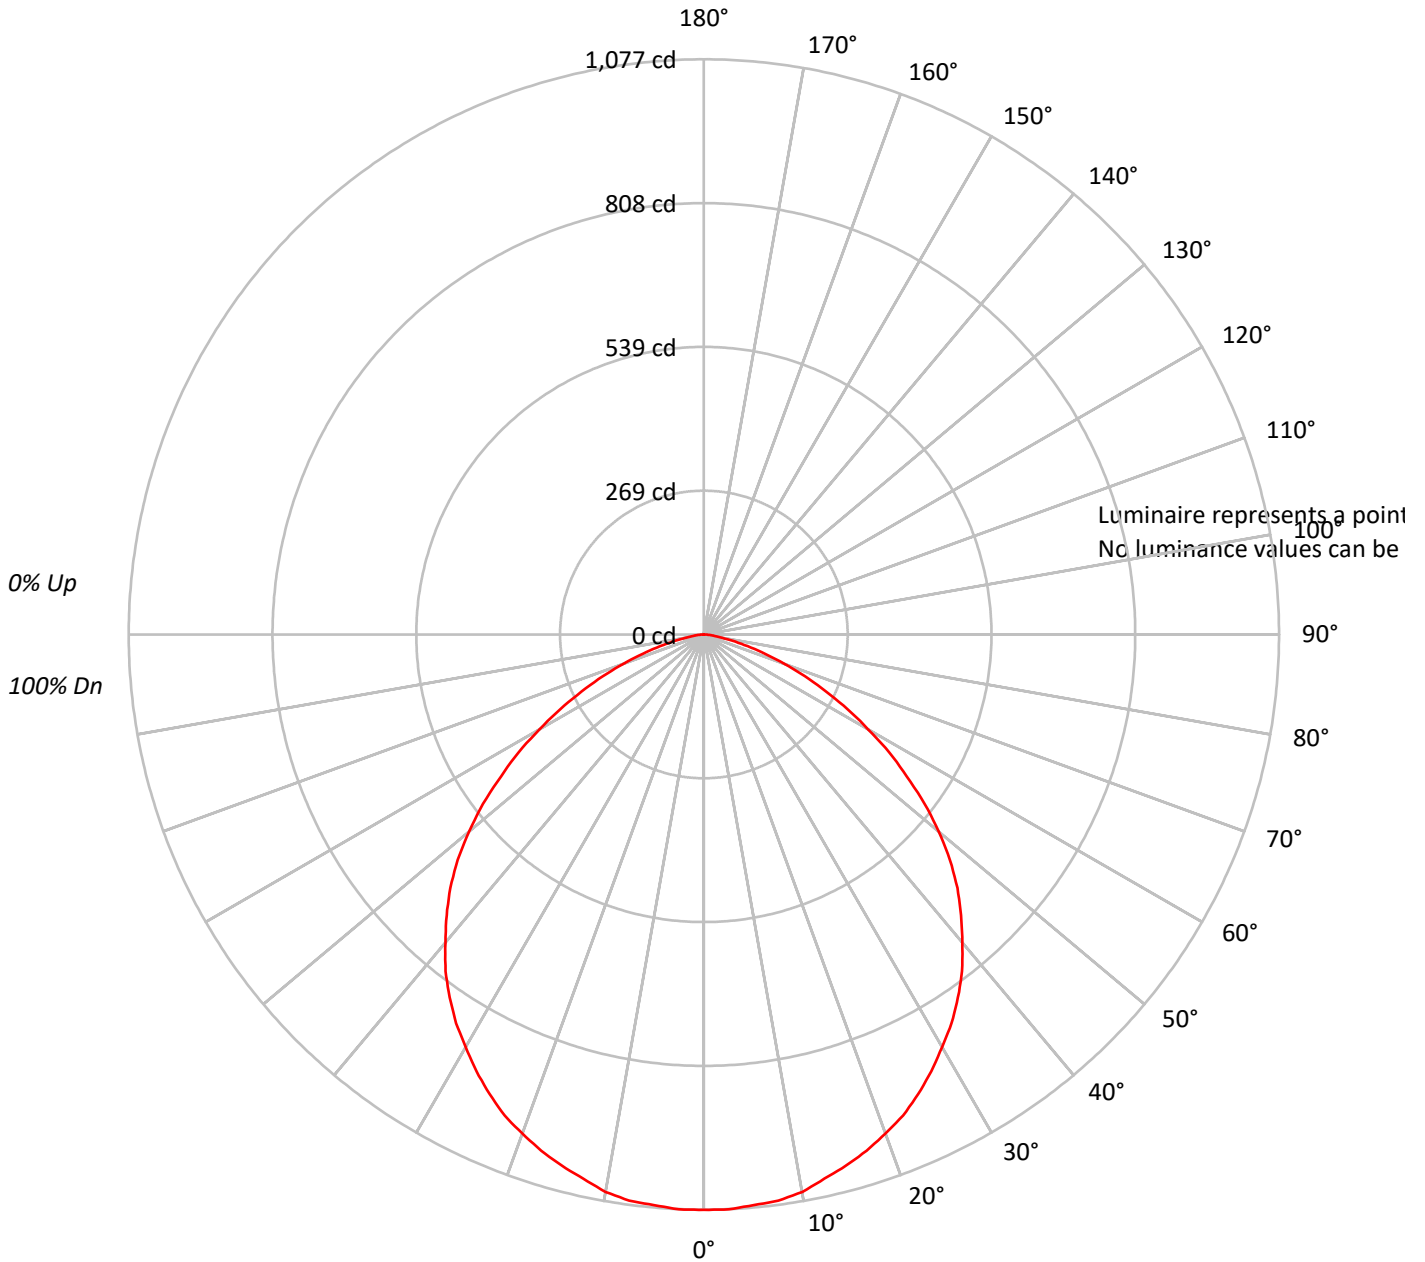



TEST NUMBER: P206348

CATALOG NUMBER: LD4B30D010 EU4B30509035 4LBCSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87	87	87	87
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74	74	74	74
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63	63	63	63
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55	55	55	55
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48	48	48	48
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42	42	42	42
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37	37	37	37
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33	33	33	33
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30	30	30	30
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27	27	27	27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P206348

CATALOG NUMBER: LD4B30D010 EU4B30509035 4LBCSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.1	3.9
10°-20°	290.6	11.0
20°-30°	437.1	16.6
30°-40°	518.1	19.6
40°-50°	515.6	19.5
50°-60°	415.6	15.8
60°-70°	251.4	9.5
70°-80°	93.3	3.5
80°-90°	13.9	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	829.8	31.5
0°-40°	1347.9	51.1
0°-60°	2279.1	86.4
0°-90°	2637.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2637.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1077	
5°	1072	102
15°	1029	291
25°	950	437
35°	830	518
45°	671	516
55°	464	416
65°	253	251
75°	85	93
85°	11	14
90°	0	



TEST NUMBER: P206348

CATALOG NUMBER: LD4B30D010 EU4B30509035 4LBCSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1077.3
2.5°	1077.3
5°	1072.5
7.5°	1069.3
10°	1059.8
12.5°	1043.8
15°	1029.4
17.5°	1013.4
20°	994.2
22.5°	975.0
25°	949.5
27.5°	922.3
30°	891.9
32.5°	863.2
35°	829.6
37.5°	794.4
40°	752.9
42.5°	712.9
45°	671.3
47.5°	625.0
50°	573.8
52.5°	521.1
55°	463.5
57.5°	412.4
60°	354.9
62.5°	303.7
65°	252.6
67.5°	204.6
70°	159.8
72.5°	119.9
75°	84.7
77.5°	54.3
80°	32.0
82.5°	19.2
85°	11.2
87.5°	4.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)