

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207584

Luminaire Tested: **LD4B30D010 EU4B30509035 4LBMMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207584
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B30D010 EU4B30509035 4LBMMW1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1978.5 lumens
Efficiency: N/A
Efficacy: 70.7 lumens/watt
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207584

CATALOG NUMBER: LD4B30D010 EU4B30509035 4LBMMW1

Luminous Intensity Polar Plot

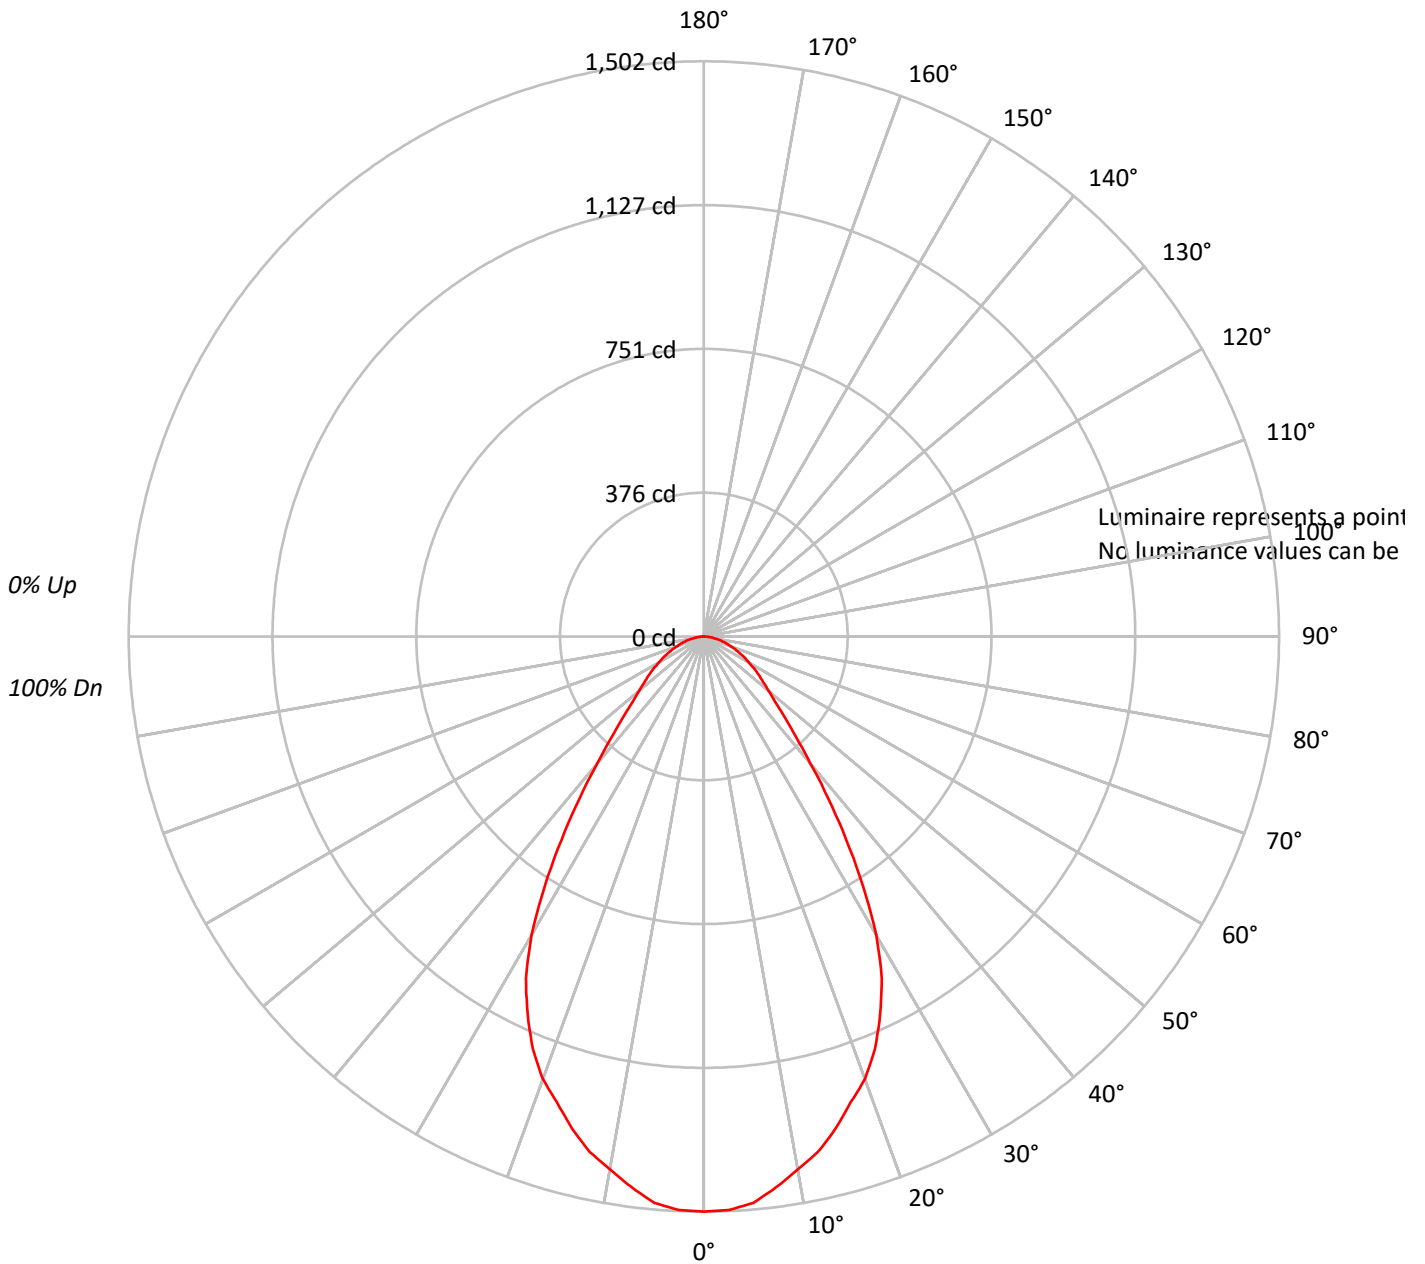



TEST NUMBER: P207584

CATALOG NUMBER: LD4B30D010 EU4B30509035 4LBMMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89																			
2	104	98	92	88	102	96	91	87	93	89	85	89	86	83	87	84	81	80																			
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71																			
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	69	66	64																			
5	85	75	67	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58																			
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53																			
7	75	64	57	52	74	63	56	51	62	56	51	60	55	51	59	54	50	49																			
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45																			
9	67	55	48	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42																			
10	63	52	45	41	62	51	45	41	51	45	40	50	44	40	49	44	40	39																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207584

CATALOG NUMBER: LD4B30D010 EU4B30509035 4LBMMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	139.2	7.0
10°-20°	373.2	18.9
20°-30°	496.2	25.1
30°-40°	405.9	20.5
40°-50°	236.4	11.9
50°-60°	156.8	7.9
60°-70°	103.1	5.2
70°-80°	54.4	2.8
80°-90°	13.3	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1008.6	51.0
0°-40°	1414.5	71.5
0°-60°	1807.6	91.4
0°-90°	1978.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1978.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1502	
5°	1485	139
15°	1330	373
25°	1089	496
35°	648	406
45°	298	236
55°	175	157
65°	103	103
75°	52	54
85°	12	13
90°	0	



TEST NUMBER: P207584

CATALOG NUMBER: LD4B30D010 EU4B30509035 4LBMMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1501.9
2.5°	1499.0
5°	1484.7
7.5°	1450.3
10°	1413.0
12.5°	1378.6
15°	1329.9
17.5°	1275.4
20°	1229.6
22.5°	1166.5
25°	1089.1
27.5°	1006.0
30°	900.0
32.5°	773.9
35°	647.7
37.5°	533.1
40°	432.8
42.5°	355.4
45°	298.1
47.5°	252.2
50°	220.7
52.5°	194.9
55°	174.8
57.5°	154.8
60°	134.7
62.5°	120.4
65°	103.2
67.5°	88.9
70°	74.5
72.5°	63.1
75°	51.6
77.5°	40.1
80°	28.7
82.5°	20.1
85°	11.5
87.5°	2.9
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)