

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P206240

Luminaire Tested: **LD4B30D010 EU4B30508050 4LBPSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P206240
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B30D010 EU4B30508050 4LBPSMW1
Description: PORTFOLIO 4 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH PLASTIC MATTE WHITE TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3221.1 lumens
Efficiency: N/A
Efficacy: 115.0 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P206240

CATALOG NUMBER: LD4B30D010 EU4B30508050 4LBPSMW1

Luminous Intensity Polar Plot

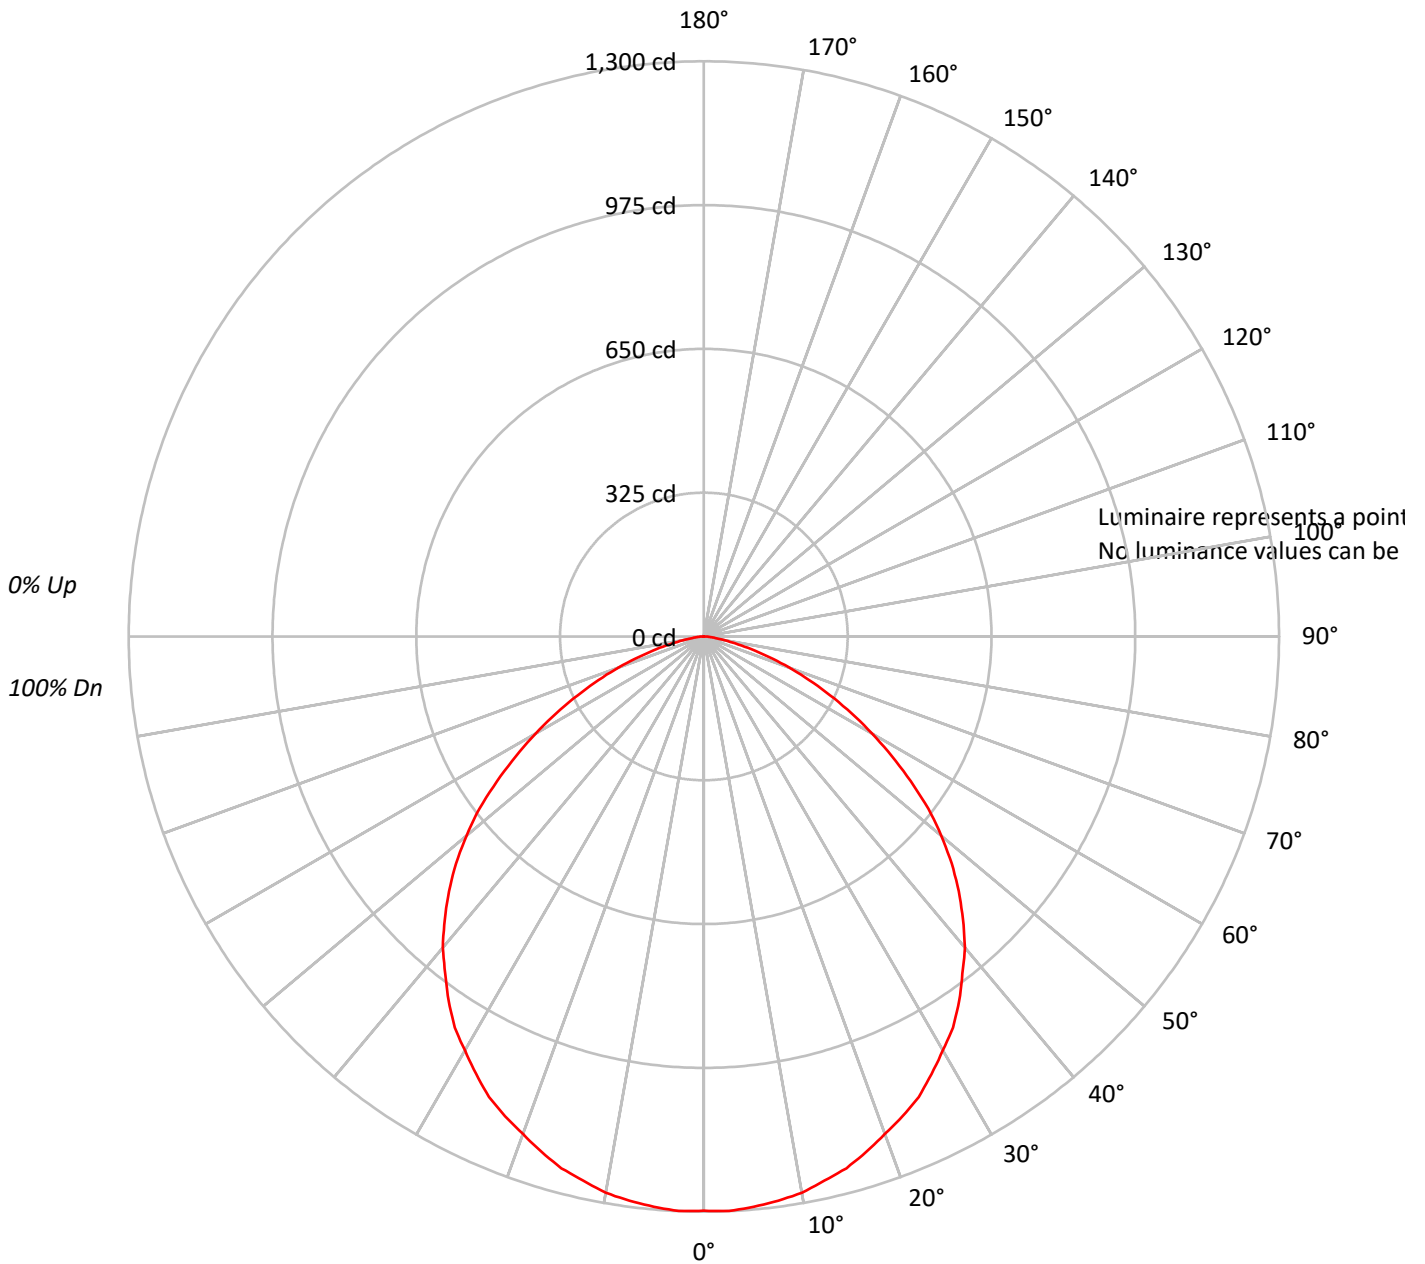



TEST NUMBER: P206240

CATALOG NUMBER: LD4B30D010 EU4B30508050 4LBPSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86				86
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74				74
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63				63
4	85	74	66	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54				54
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47				47
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42				42
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37				37
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33				33
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30				30
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27				27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P206240

CATALOG NUMBER: LD4B30D010 EU4B30508050 4LBPSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	123.0	3.8
10°-20°	350.5	10.9
20°-30°	527.9	16.4
30°-40°	628.1	19.5
40°-50°	627.0	19.5
50°-60°	509.9	15.8
60°-70°	313.7	9.7
70°-80°	121.5	3.8
80°-90°	19.5	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1001.4	31.1
0°-40°	1629.5	50.6
0°-60°	2766.4	85.9
0°-90°	3221.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3221.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1298	
5°	1294	123
15°	1244	351
25°	1149	528
35°	1006	628
45°	815	627
55°	571	510
65°	315	314
75°	111	122
85°	15	19
90°	0	



TEST NUMBER: P206240

CATALOG NUMBER: LD4B30D010 EU4B30508050 4LBPSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1297.8
2.5°	1299.7
5°	1294.0
7.5°	1286.3
10°	1276.8
12.5°	1259.6
15°	1244.3
17.5°	1221.4
20°	1196.6
22.5°	1173.7
25°	1148.9
27.5°	1114.6
30°	1080.2
32.5°	1047.8
35°	1005.8
37.5°	960.0
40°	918.0
42.5°	866.5
45°	814.9
47.5°	759.6
50°	700.4
52.5°	639.4
55°	570.6
57.5°	503.8
60°	439.0
62.5°	376.0
65°	314.9
67.5°	257.6
70°	204.2
72.5°	154.6
75°	110.7
77.5°	72.5
80°	43.9
82.5°	26.7
85°	15.3
87.5°	7.6
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)