

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P206873

Luminaire Tested: **LD4B40D010 EU4B30509024 4LBWGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P206873
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B40D010 EU4B30509024 4LBWGPH1
Description: PORTFOLIO 4 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-43.02W DE010-42.54W D5LT-42.539W DMX-41.87W DL2-41.57W
DL3-44.71W DLE-39.33W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1933.0 lumens
Efficiency: N/A
Efficacy: 46.2 lumens/watt
Spacing Criteria (0/90/45): 1.12 / 1.12 / 1.08
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P206873

CATALOG NUMBER: LD4B40D010 EU4B30509024 4LBWGPH1

Luminous Intensity Polar Plot

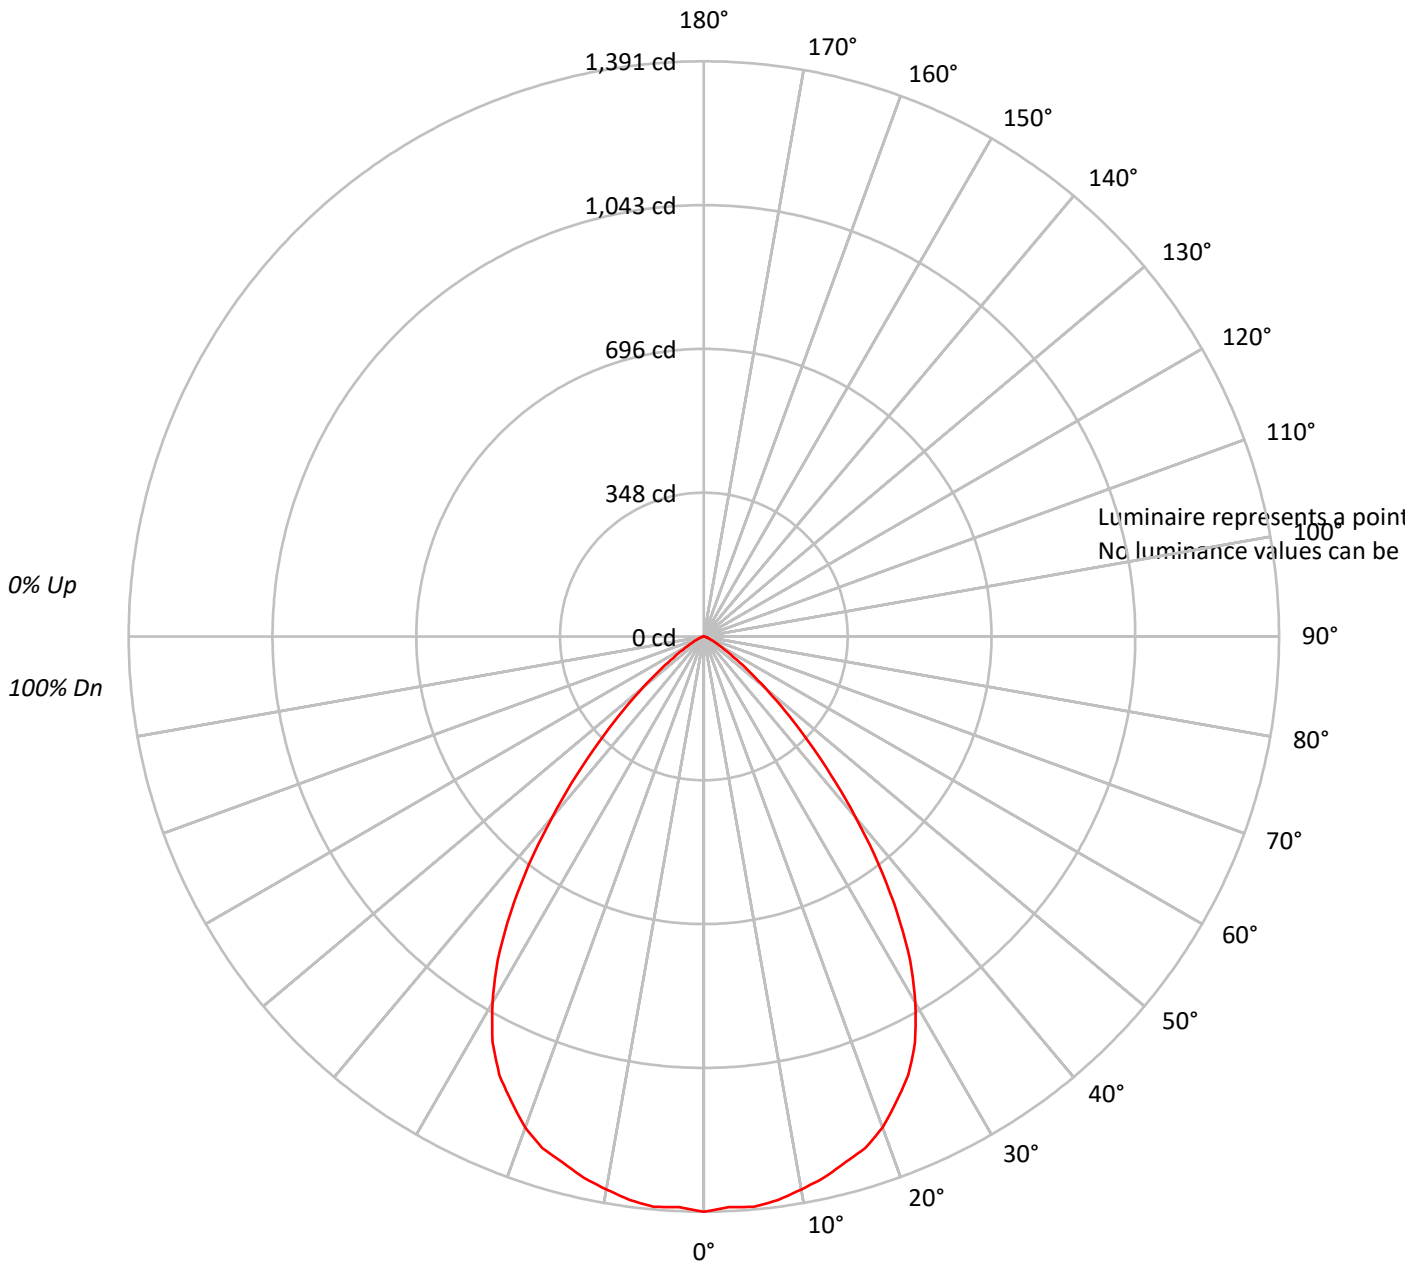



TEST NUMBER: P206873

CATALOG NUMBER: LD4B40D010 EU4B30509024 4LBWGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																		
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	113	110	107	104	110	107	105	103	103	101	99	100	98	96	96	95	94	92																												
2	106	100	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83																												
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	77	76																												
4	94	85	78	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69																												
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	64	63																												
6	83	72	65	61	81	71	65	60	70	64	60	68	63	59	67	63	59	57																												
7	78	67	60	55	76	66	60	55	65	59	55	64	58	55	63	58	54	53																												
8	73	62	56	51	72	62	55	51	61	55	50	59	54	50	58	54	50	48																												
9	69	58	51	47	68	58	51	47	57	51	47	56	50	46	55	50	46	45																												
10	65	54	48	43	64	54	48	43	53	47	43	52	47	43	51	46	43	41																												

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P206873

CATALOG NUMBER: LD4B40D010 EU4B30509024 4LBWGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	131.2	6.8
10°-20°	371.9	19.2
20°-30°	533.4	27.6
30°-40°	502.2	26.0
40°-50°	277.3	14.3
50°-60°	89.0	4.6
60°-70°	22.3	1.2
70°-80°	5.3	0.3
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1036.5	53.6
0°-40°	1538.7	79.6
0°-60°	1905.0	98.5
0°-90°	1933.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1933.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1391	
5°	1385	131
15°	1318	372
25°	1170	533
35°	815	502
45°	352	277
55°	90	89
65°	20	22
75°	3	5
85°	0	0
90°	0	



TEST NUMBER: P206873

CATALOG NUMBER: LD4B40D010 EU4B30509024 4LBWGPH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	1391.3
2.5°	1381.2
5°	1384.6
7.5°	1374.5
10°	1357.8
12.5°	1341.0
15°	1317.5
17.5°	1297.4
20°	1263.9
22.5°	1217.0
25°	1170.0
27.5°	1106.3
30°	1022.5
32.5°	928.6
35°	814.7
37.5°	694.0
40°	569.9
42.5°	455.9
45°	352.0
47.5°	264.8
50°	191.1
52.5°	134.1
55°	90.5
57.5°	60.3
60°	43.6
62.5°	30.2
65°	20.1
67.5°	13.4
70°	10.1
72.5°	6.7
75°	3.4
77.5°	3.4
80°	3.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)