

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207079

Luminaire Tested: **LD4B40D010 EU4B30509024 4LBWMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P207079  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD4B40D010 EU4B30509024 4LBWMW1  
Description: PORTFOLIO 4 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT  
WIDE DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-43.02W DE010-42.54W D5LT-42.539W DMX-41.87W DL2-41.57W  
DL3-44.71W DLE-39.33W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2579.6 lumens  
Efficiency: N/A  
Efficacy: 61.7 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.09  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 41.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P207079

CATALOG NUMBER: LD4B40D010 EU4B30509024 4LBWMW1

### Luminous Intensity Polar Plot

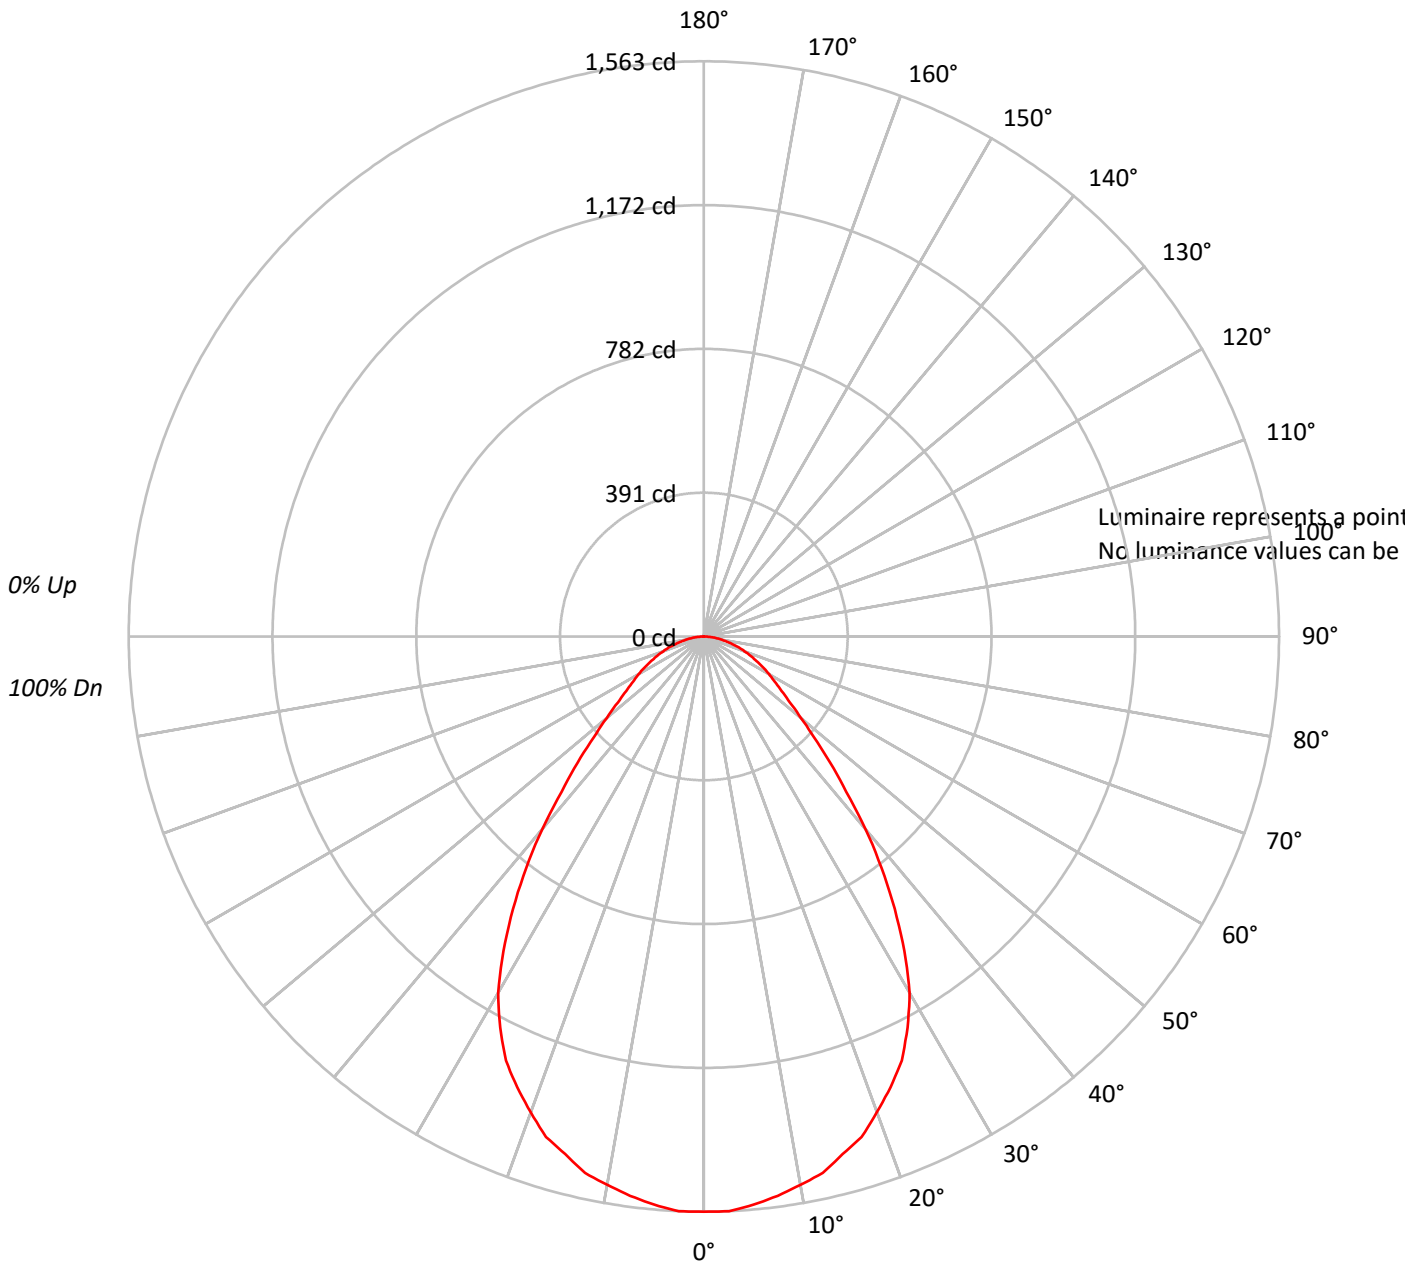



TEST NUMBER: P207079

CATALOG NUMBER: LD4B40D010 EU4B30509024 4LBWMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88		
2	103	96	91	86	101	94	89	85	91	87	83	88	84	81	85	82	80	78		
3	96	87	80	75	93	85	79	74	83	77	73	80	76	72	78	74	71	69		
4	89	79	72	66	87	78	71	66	75	69	65	73	68	64	71	67	63	61		
5	83	72	64	59	81	71	64	58	69	63	58	67	62	57	65	61	57	55		
6	78	66	58	53	76	65	58	53	64	57	52	62	56	52	60	55	51	50		
7	73	61	53	48	71	60	53	48	59	52	47	57	51	47	56	51	47	45		
8	68	56	49	44	67	56	49	44	54	48	43	53	47	43	52	47	43	41		
9	64	52	45	40	63	52	45	40	51	44	40	50	44	40	49	43	39	38		
10	61	49	42	37	59	48	41	37	47	41	37	46	41	37	46	40	36	35		

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P207079

CATALOG NUMBER: LD4B40D010 EU4B30509024 4LBWMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	146.8	5.7
10°-20°	410.4	15.9
20°-30°	580.0	22.5
30°-40°	561.9	21.8
40°-50°	379.1	14.7
50°-60°	235.3	9.1
60°-70°	157.3	6.1
70°-80°	86.0	3.3
80°-90°	22.8	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1137.2	44.1
0°-40°	1699.1	65.9
0°-60°	2313.5	89.7
0°-90°	2579.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2579.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1563	
5°	1550	147
15°	1456	410
25°	1272	580
35°	904	562
45°	485	379
55°	258	235
65°	157	157
75°	80	86
85°	20	23
90°	0	



TEST NUMBER: P207079

CATALOG NUMBER: LD4B40D010 EU4B30509024 4LBMMW1

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1563.2
2.5°	1563.2
5°	1549.8
7.5°	1533.1
10°	1513.0
12.5°	1492.9
15°	1456.1
17.5°	1425.9
20°	1375.7
22.5°	1325.5
25°	1272.0
27.5°	1198.3
30°	1118.0
32.5°	1014.2
35°	903.8
37.5°	793.3
40°	682.8
42.5°	572.4
45°	485.4
47.5°	405.0
50°	344.8
52.5°	294.6
55°	257.7
57.5°	227.6
60°	204.2
62.5°	180.8
65°	157.3
67.5°	137.2
70°	117.2
72.5°	100.4
75°	80.3
77.5°	63.6
80°	46.9
82.5°	33.5
85°	20.1
87.5°	6.7
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)