

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207188

Luminaire Tested: **LD4B40D010 EU4B30509727 4LBMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207188
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B40D010 EU4B30509727 4LBMH1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-43.02W DE010-42.54W D5LT-42.539W DMX-41.87W DL2-41.57W
DL3-44.71W DLE-39.33W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2195.2 lumens
Efficiency: N/A
Efficacy: 52.5 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207188

CATALOG NUMBER: LD4B40D010 EU4B30509727 4LBMH1

Luminous Intensity Polar Plot

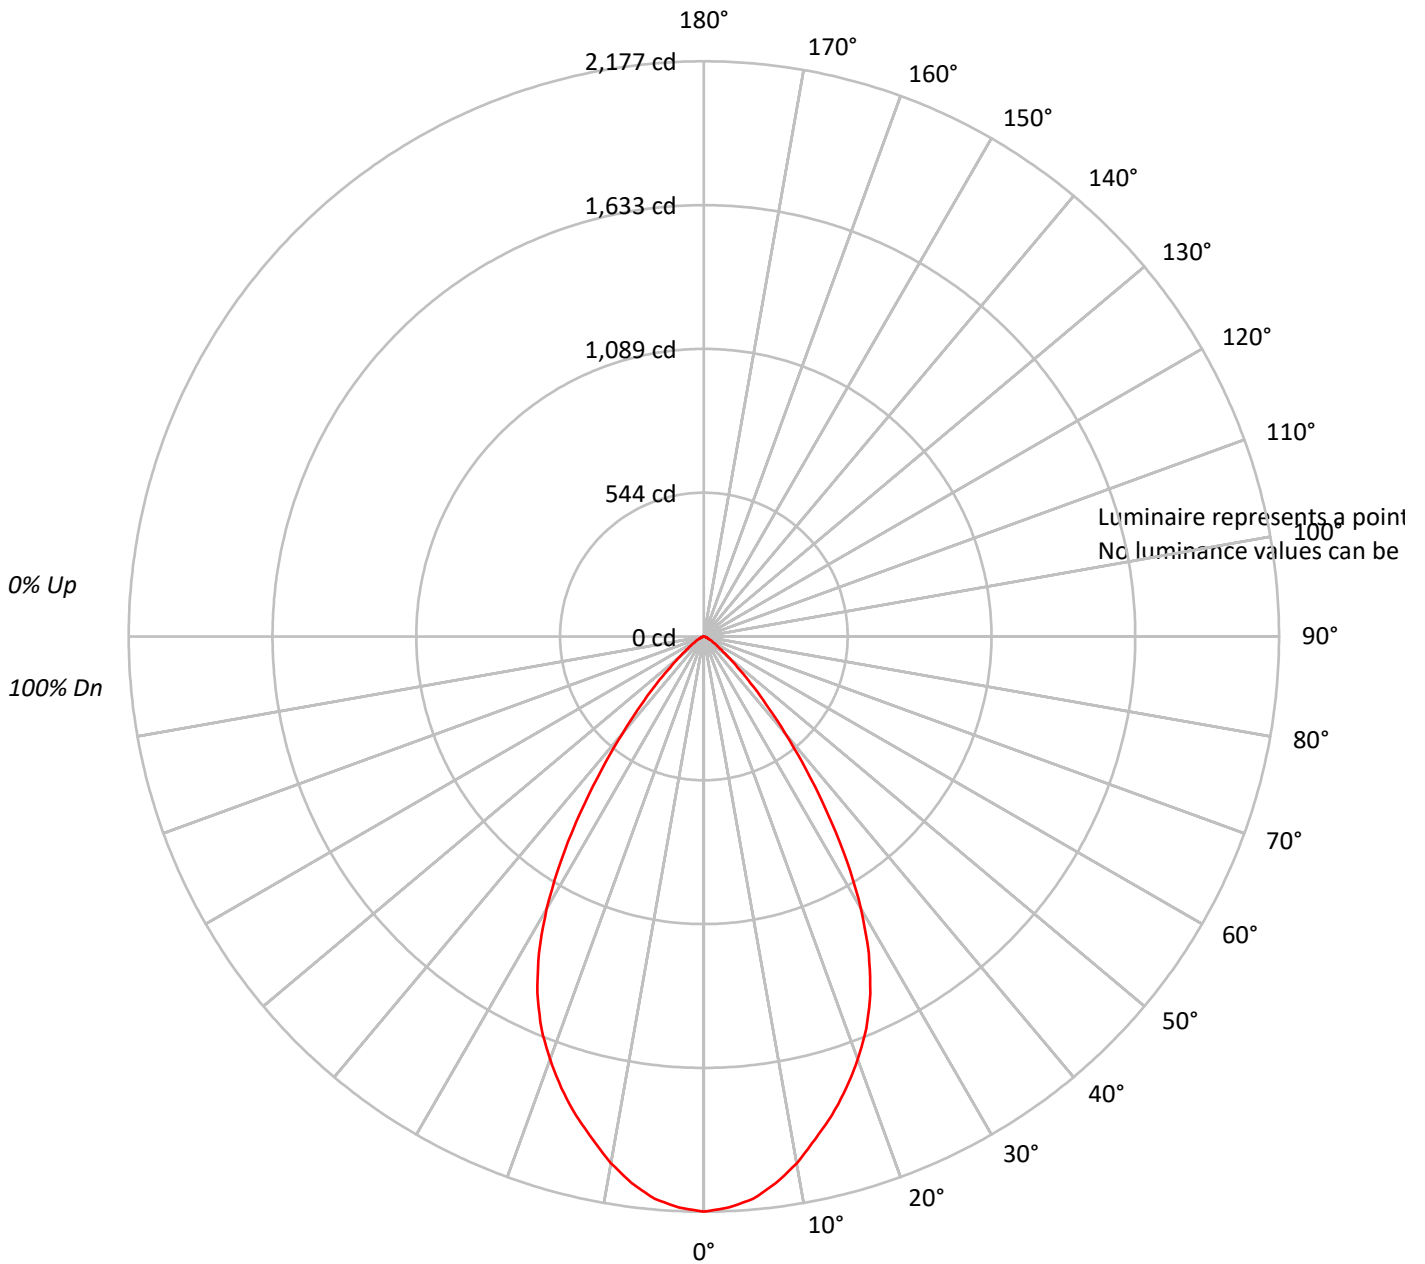



TEST NUMBER: P207188

CATALOG NUMBER: LD4B40D010 EU4B30509727 4LBMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79			
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	73			
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67			
6	86	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62			
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58			
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54			
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50			
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207188

CATALOG NUMBER: LD4B40D010 EU4B30509727 4LBMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	200.3	9.1
10°-20°	525.5	23.9
20°-30°	675.3	30.8
30°-40°	508.1	23.1
40°-50°	204.1	9.3
50°-60°	58.0	2.6
60°-70°	18.4	0.8
70°-80°	5.2	0.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1401.0	63.8
0°-40°	1909.1	87.0
0°-60°	2171.1	98.9
0°-90°	2195.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2195.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2177	
5°	2137	200
15°	1875	525
25°	1491	675
35°	815	508
45°	252	204
55°	60	58
65°	17	18
75°	3	5
85°	0	0
90°	0	



TEST NUMBER: P207188

CATALOG NUMBER: LD4B40D010 EU4B30509727 4LBMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2176.7
2.5°	2163.4
5°	2136.9
7.5°	2087.2
10°	2024.3
12.5°	1948.1
15°	1875.2
17.5°	1792.4
20°	1702.9
22.5°	1606.9
25°	1490.9
27.5°	1351.7
30°	1189.4
32.5°	1007.2
35°	815.0
37.5°	636.1
40°	477.1
42.5°	351.2
45°	251.8
47.5°	172.3
50°	119.3
52.5°	82.8
55°	59.6
57.5°	43.1
60°	33.1
62.5°	23.2
65°	16.6
67.5°	13.3
70°	9.9
72.5°	6.6
75°	3.3
77.5°	3.3
80°	3.3
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)