

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P208418

Luminaire Tested: **LD4B40D010 EU4B30509727 4LBSLI1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P208418  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD4B40D010 EU4B30509727 4LBSLI1  
Description: PORTFOLIO 4 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH SPECULAR CLEAR TRIM  
WATTAGE D010TR-43.02W DE010-42.54W D5LT-42.539W DMX-41.87W DL2-41.57W  
DL3-44.71W DLE-39.33W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2989.8 lumens  
Efficiency: N/A  
Efficacy: 71.5 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 41.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P208418

CATALOG NUMBER: LD4B40D010 EU4B30509727 4LBSLI1

### Luminous Intensity Polar Plot

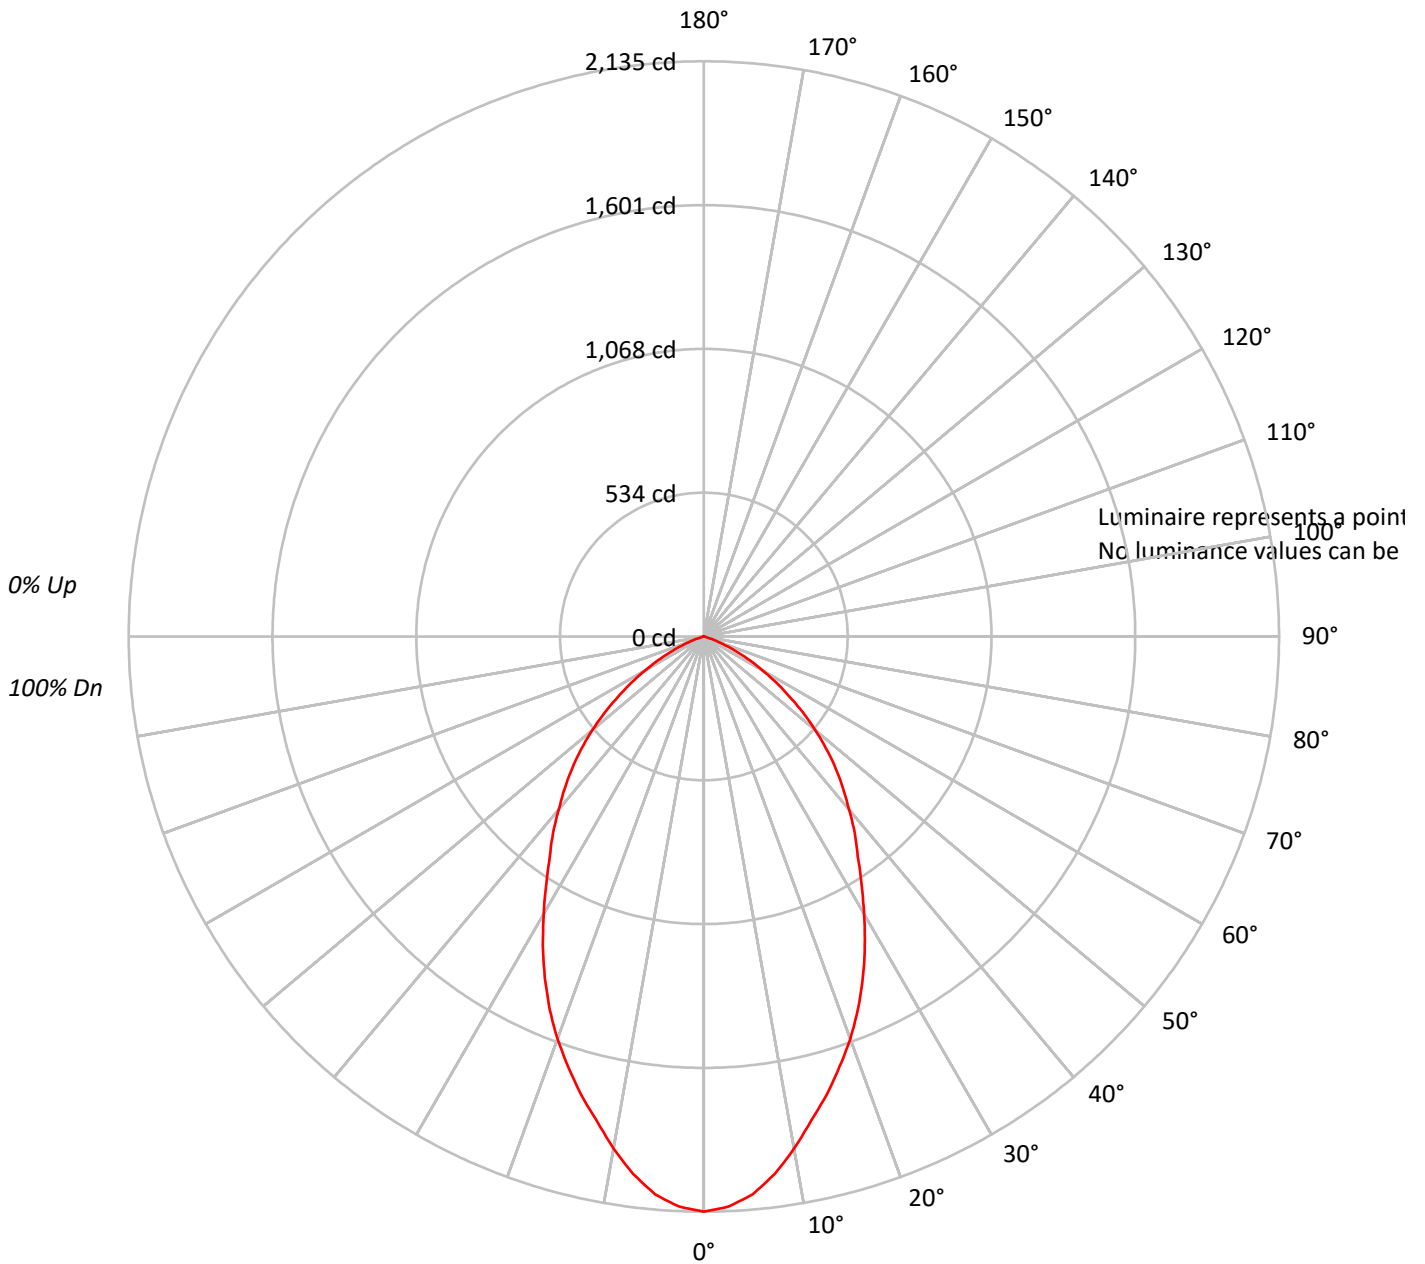



TEST NUMBER: P208418

CATALOG NUMBER: LD4B40D010 EU4B30509727 4LBSLI1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90	90	90	90
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80	80	80	80
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71	71	71	71
4	90	81	73	68	88	79	73	68	77	71	67	75	70	66	73	69	65	63	63	63	63
5	84	73	66	61	82	72	65	60	70	64	60	69	63	59	67	62	59	57	57	57	57
6	79	67	60	54	77	66	59	54	65	58	54	63	58	53	62	57	53	51	51	51	51
7	74	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46	46	46	46
8	69	57	50	45	68	57	50	45	55	49	45	54	49	44	53	48	44	42	42	42	42
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	44	41	39	39	39	39
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36	36	36	36

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P208418

CATALOG NUMBER: LD4B40D010 EU4B30509727 4LBSLI1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	193.6	6.5
10°-20°	493.7	16.5
20°-30°	639.7	21.4
30°-40°	626.8	21.0
40°-50°	531.3	17.8
50°-60°	348.3	11.6
60°-70°	140.0	4.7
70°-80°	16.0	0.5
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1327.0	44.4
0°-40°	1953.8	65.3
0°-60°	2833.3	94.8
0°-90°	2989.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2989.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2135	
5°	2078	194
15°	1761	494
25°	1397	640
35°	996	627
45°	692	531
55°	387	348
65°	136	140
75°	7	16
85°	0	0
90°	0	



TEST NUMBER: P208418

CATALOG NUMBER: LD4B40D010 EU4B30509727 4LBSL11

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2134.8
2.5°	2118.3
5°	2078.5
7.5°	2012.3
10°	1929.6
12.5°	1840.2
15°	1760.8
17.5°	1674.8
20°	1588.7
22.5°	1496.0
25°	1396.7
27.5°	1294.1
30°	1188.2
32.5°	1088.9
35°	996.2
37.5°	920.1
40°	837.4
42.5°	764.6
45°	691.7
47.5°	615.6
50°	539.5
52.5°	463.4
55°	387.2
57.5°	317.7
60°	251.5
62.5°	192.0
65°	135.7
67.5°	89.4
70°	53.0
72.5°	23.2
75°	6.6
77.5°	3.3
80°	3.3
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)