

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207590

Luminaire Tested: **LD4B40D010 EU4B30508030 4LBMMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P207590  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD4B40D010 EU4B30508030 4LBMMW1  
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-43.02W DE010-42.54W D5LT-42.539W DMX-41.87W DL2-41.57W  
DL3-44.71W DLE-39.33W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3198.9 lumens  
Efficiency: N/A  
Efficacy: 76.5 lumens/watt  
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 41.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P207590

CATALOG NUMBER: LD4B40D010 EU4B30508030 4LBMMW1

### Luminous Intensity Polar Plot

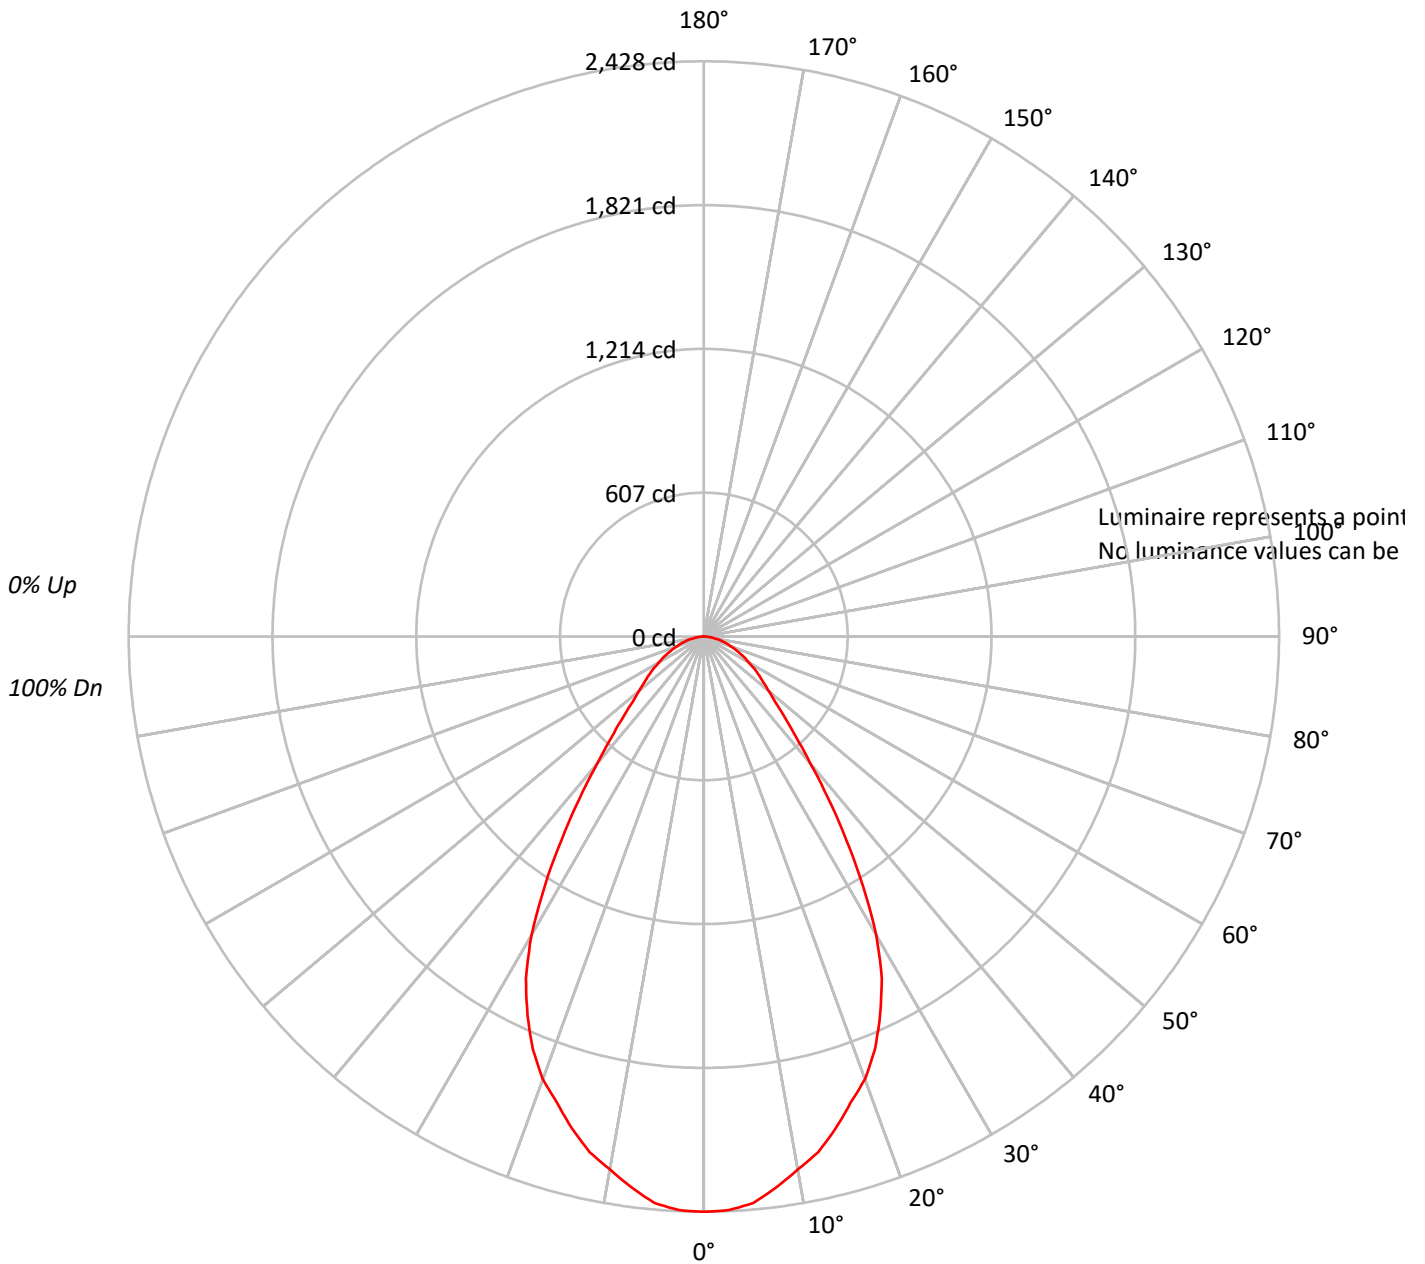



TEST NUMBER: P207590

CATALOG NUMBER: LD4B40D010 EU4B30508030 4LBMMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89			
2	104	98	92	88	102	96	91	87	93	89	85	89	86	83	87	84	81	80			
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71			
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	69	66	64			
5	85	75	67	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58			
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53			
7	75	64	57	52	74	63	56	51	62	56	51	60	55	51	59	54	50	49			
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45			
9	67	55	48	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42			
10	63	52	45	41	62	51	45	41	51	45	40	50	44	40	49	44	40	39			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P207590

CATALOG NUMBER: LD4B40D010 EU4B30508030 4LBMMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	225.1	7.0
10°-20°	603.4	18.9
20°-30°	802.4	25.1
30°-40°	656.2	20.5
40°-50°	382.2	11.9
50°-60°	253.5	7.9
60°-70°	166.7	5.2
70°-80°	88.0	2.7
80°-90°	21.4	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1630.9	51.0
0°-40°	2287.2	71.5
0°-60°	2922.9	91.4
0°-90°	3198.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3198.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2428	
5°	2401	225
15°	2150	603
25°	1761	802
35°	1047	656
45°	482	382
55°	283	253
65°	167	167
75°	83	88
85°	18	21
90°	0	



TEST NUMBER: P207590

CATALOG NUMBER: LD4B40D010 EU4B30508030 4LBMMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2428.4
2.5°	2423.8
5°	2400.6
7.5°	2345.0
10°	2284.8
12.5°	2229.1
15°	2150.4
17.5°	2062.3
20°	1988.2
22.5°	1886.2
25°	1761.1
27.5°	1626.7
30°	1455.2
32.5°	1251.3
35°	1047.4
37.5°	862.0
40°	699.8
42.5°	574.7
45°	482.0
47.5°	407.8
50°	356.8
52.5°	315.1
55°	282.7
57.5°	250.3
60°	217.8
62.5°	194.6
65°	166.8
67.5°	143.7
70°	120.5
72.5°	102.0
75°	83.4
77.5°	64.9
80°	46.3
82.5°	32.4
85°	18.5
87.5°	4.6
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)