

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P208002

Luminaire Tested: **LD4B40D010 EU4B30508030 4LBNMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P208002
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B40D010 EU4B30508030 4LBNMW1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-43.02W DE010-42.54W D5LT-42.539W DMX-41.87W DL2-41.57W
DL3-44.71W DLE-39.33W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2916.1 lumens
Efficiency: N/A
Efficacy: 69.8 lumens/watt
Spacing Criteria (0/90/45): 0.96 / 0.96 / 0.95
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P208002

CATALOG NUMBER: LD4B40D010 EU4B30508030 4LBNMW1

Luminous Intensity Polar Plot

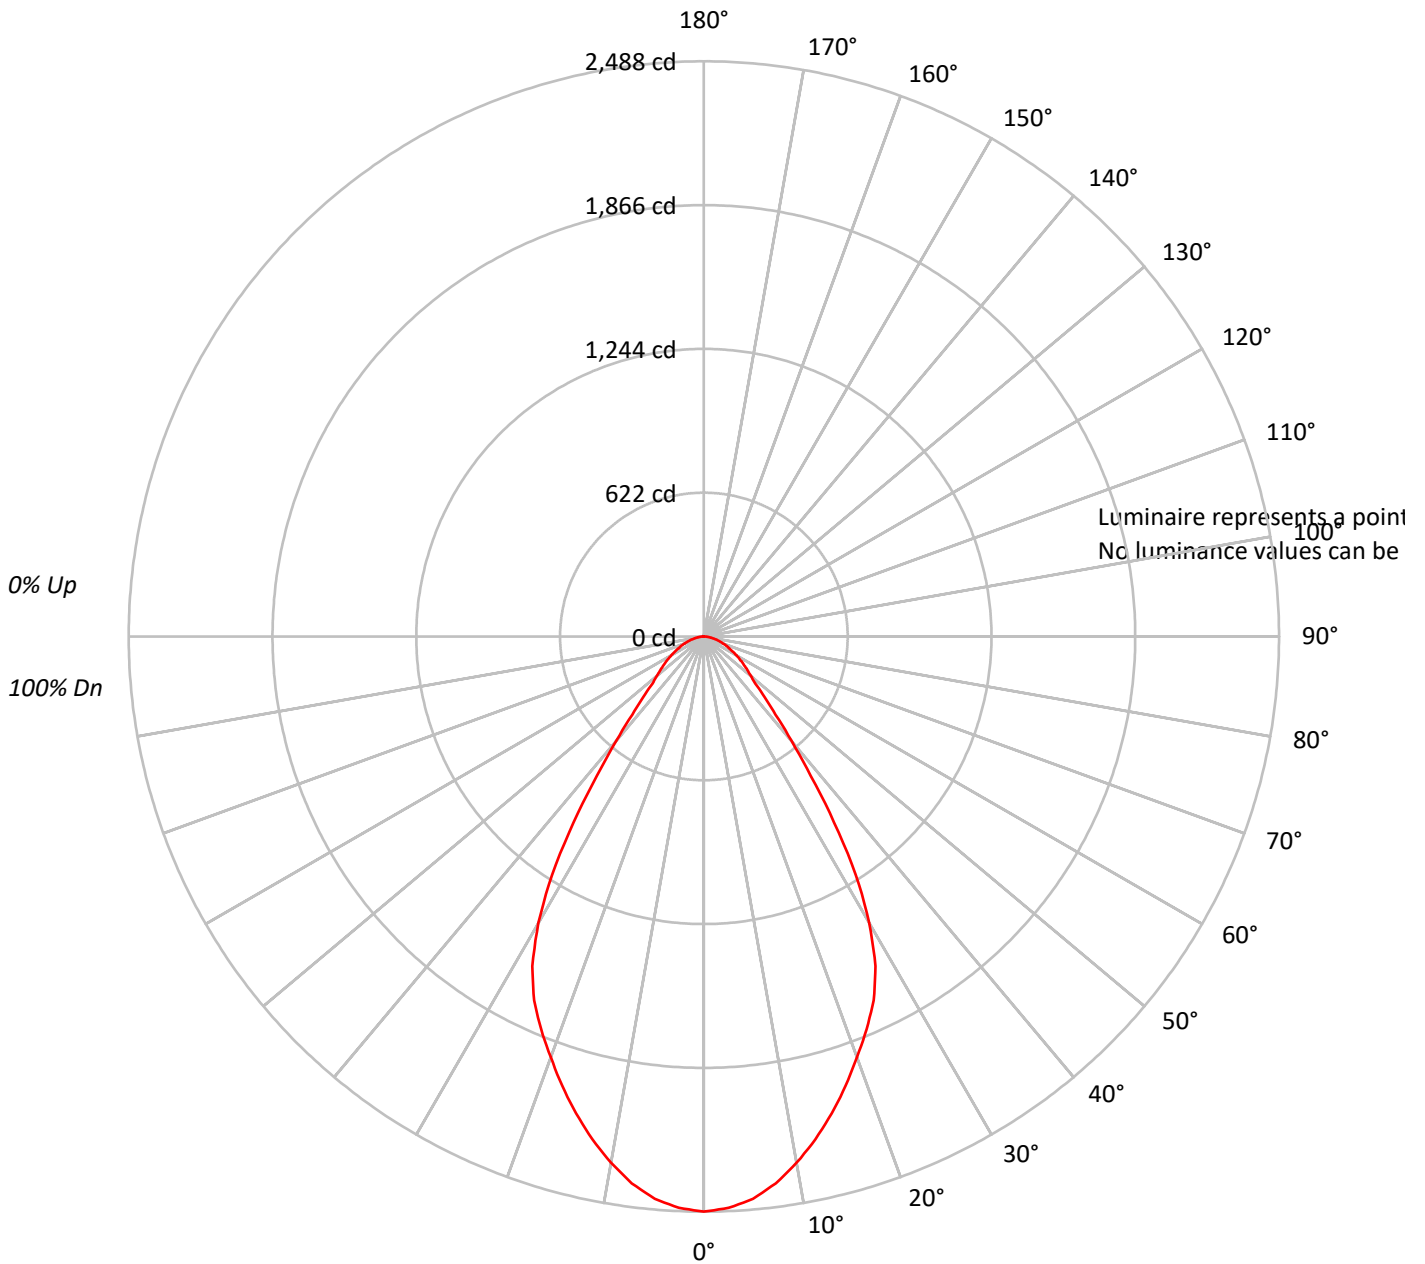



TEST NUMBER: P208002

CATALOG NUMBER: LD4B40D010 EU4B30508030 4LBNMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	105	103	109	106	104	101	102	100	98	98	97	95	95	94	92	90		
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81		
3	98	90	84	80	96	89	83	79	86	82	78	84	80	76	81	78	75	73		
4	92	83	76	71	90	82	76	71	80	74	70	78	73	69	76	72	68	67		
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	63	61		
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56		
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	62	57	53	52		
8	73	62	55	50	71	61	55	50	60	54	50	59	53	49	58	53	49	48		
9	69	58	51	46	68	57	51	46	56	50	46	55	50	46	54	49	46	44		
10	65	54	48	43	64	54	47	43	53	47	43	52	47	43	51	46	43	41		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P208002

CATALOG NUMBER: LD4B40D010 EU4B30508030 4LBNMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	228.9	7.8
10°-20°	598.8	20.5
20°-30°	788.1	27.0
30°-40°	613.5	21.0
40°-50°	298.0	10.2
50°-60°	188.2	6.5
60°-70°	121.4	4.2
70°-80°	63.5	2.2
80°-90°	15.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1615.8	55.4
0°-40°	2229.3	76.4
0°-60°	2715.5	93.1
0°-90°	2916.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2916.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2488	
5°	2441	229
15°	2136	599
25°	1737	788
35°	982	613
45°	371	298
55°	208	188
65°	120	121
75°	60	63
85°	14	16
90°	0	



TEST NUMBER: P208002

CATALOG NUMBER: LD4B40D010 EU4B30508030 4LBNMW1

CANDELA DISTRIBUTION (FULL):

0°	
0°	2487.7
2.5°	2473.8
5°	2441.4
7.5°	2385.8
10°	2311.7
12.5°	2228.3
15°	2135.6
17.5°	2038.4
20°	1936.4
22.5°	1839.1
25°	1737.2
27.5°	1607.5
30°	1431.5
32.5°	1223.0
35°	982.1
37.5°	759.7
40°	588.3
42.5°	458.6
45°	370.6
47.5°	301.1
50°	264.1
52.5°	236.3
55°	208.5
57.5°	185.3
60°	162.1
62.5°	139.0
65°	120.4
67.5°	106.6
70°	88.0
72.5°	74.1
75°	60.2
77.5°	46.3
80°	32.4
82.5°	23.2
85°	13.9
87.5°	4.6
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)