

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207797

Luminaire Tested: **LD4B40D010 EU4B30508035 4LBNGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207797
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B40D010 EU4B30508035 4LBNGPH1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-43.02W DE010-42.54W D5LT-42.539W DMX-41.87W DL2-41.57W
DL3-44.71W DLE-39.33W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1962.2 lumens
Efficiency: N/A
Efficacy: 46.9 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.88
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207797

CATALOG NUMBER: LD4B40D010 EU4B30508035 4LBNGPH1

Luminous Intensity Polar Plot

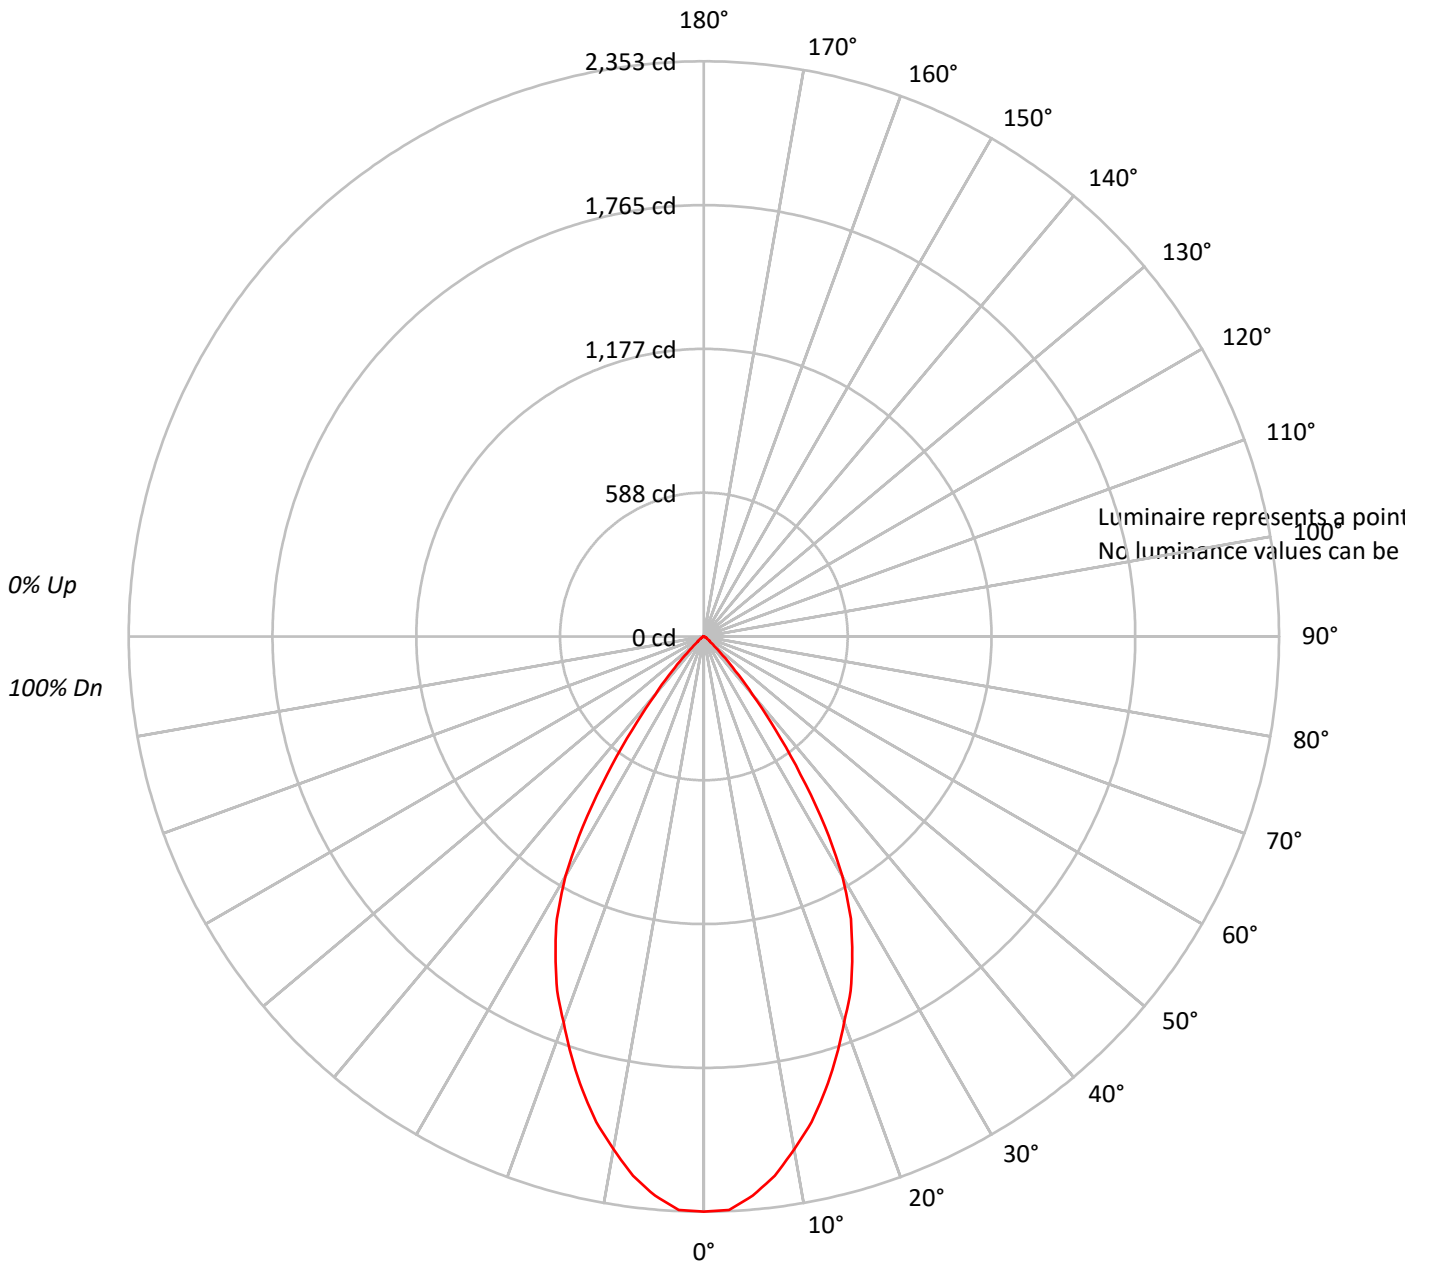



TEST NUMBER: P207797

CATALOG NUMBER: LD4B40D010 EU4B30508035 4LBNGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94																			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	91	89	87																			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81																			
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76																			
5	93	84	78	74	91	83	78	74	82	77	73	80	76	73	78	75	72	70																			
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62																			
8	80	70	64	60	78	70	64	60	68	63	60	67	63	59	66	62	59	58																			
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54																			
10	72	63	57	53	71	62	57	53	61	56	53	61	56	53	60	56	52	51																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207797

CATALOG NUMBER: LD4B40D010 EU4B30508035 4LBNGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	213.9	10.9
10°-20°	536.3	27.3
20°-30°	653.6	33.3
30°-40°	431.2	22.0
40°-50°	99.3	5.1
50°-60°	19.0	1.0
60°-70°	7.0	0.4
70°-80°	1.9	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1403.8	71.5
0°-40°	1835.0	93.5
0°-60°	1953.3	99.5
0°-90°	1962.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1962.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2353	
5°	2296	214
15°	1920	536
25°	1436	654
35°	689	431
45°	109	99
55°	19	19
65°	5	7
75°	0	2
85°	0	0
90°	0	



TEST NUMBER: P207797

CATALOG NUMBER: LD4B40D010 EU4B30508035 4LBNGPH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	2353.0
2.5°	2348.3
5°	2296.0
7.5°	2224.7
10°	2129.6
12.5°	2034.5
15°	1920.5
17.5°	1801.6
20°	1678.0
22.5°	1568.7
25°	1435.6
27.5°	1302.5
30°	1131.4
32.5°	922.2
35°	689.3
37.5°	480.1
40°	309.0
42.5°	190.1
45°	109.3
47.5°	57.0
50°	33.3
52.5°	28.5
55°	19.0
57.5°	14.3
60°	14.3
62.5°	9.5
65°	4.8
67.5°	4.8
70°	4.8
72.5°	4.8
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)