

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207592

Luminaire Tested: **LD4B40D010 EU4B30508040 4LBMMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207592
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B40D010 EU4B30508040 4LBMMW1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-43.02W DE010-42.54W D5LT-42.539W DMX-41.87W DL2-41.57W
DL3-44.71W DLE-39.33W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3313.6 lumens
Efficiency: N/A
Efficacy: 79.3 lumens/watt
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207592

CATALOG NUMBER: LD4B40D010 EU4B30508040 4LBMMW1

Luminous Intensity Polar Plot

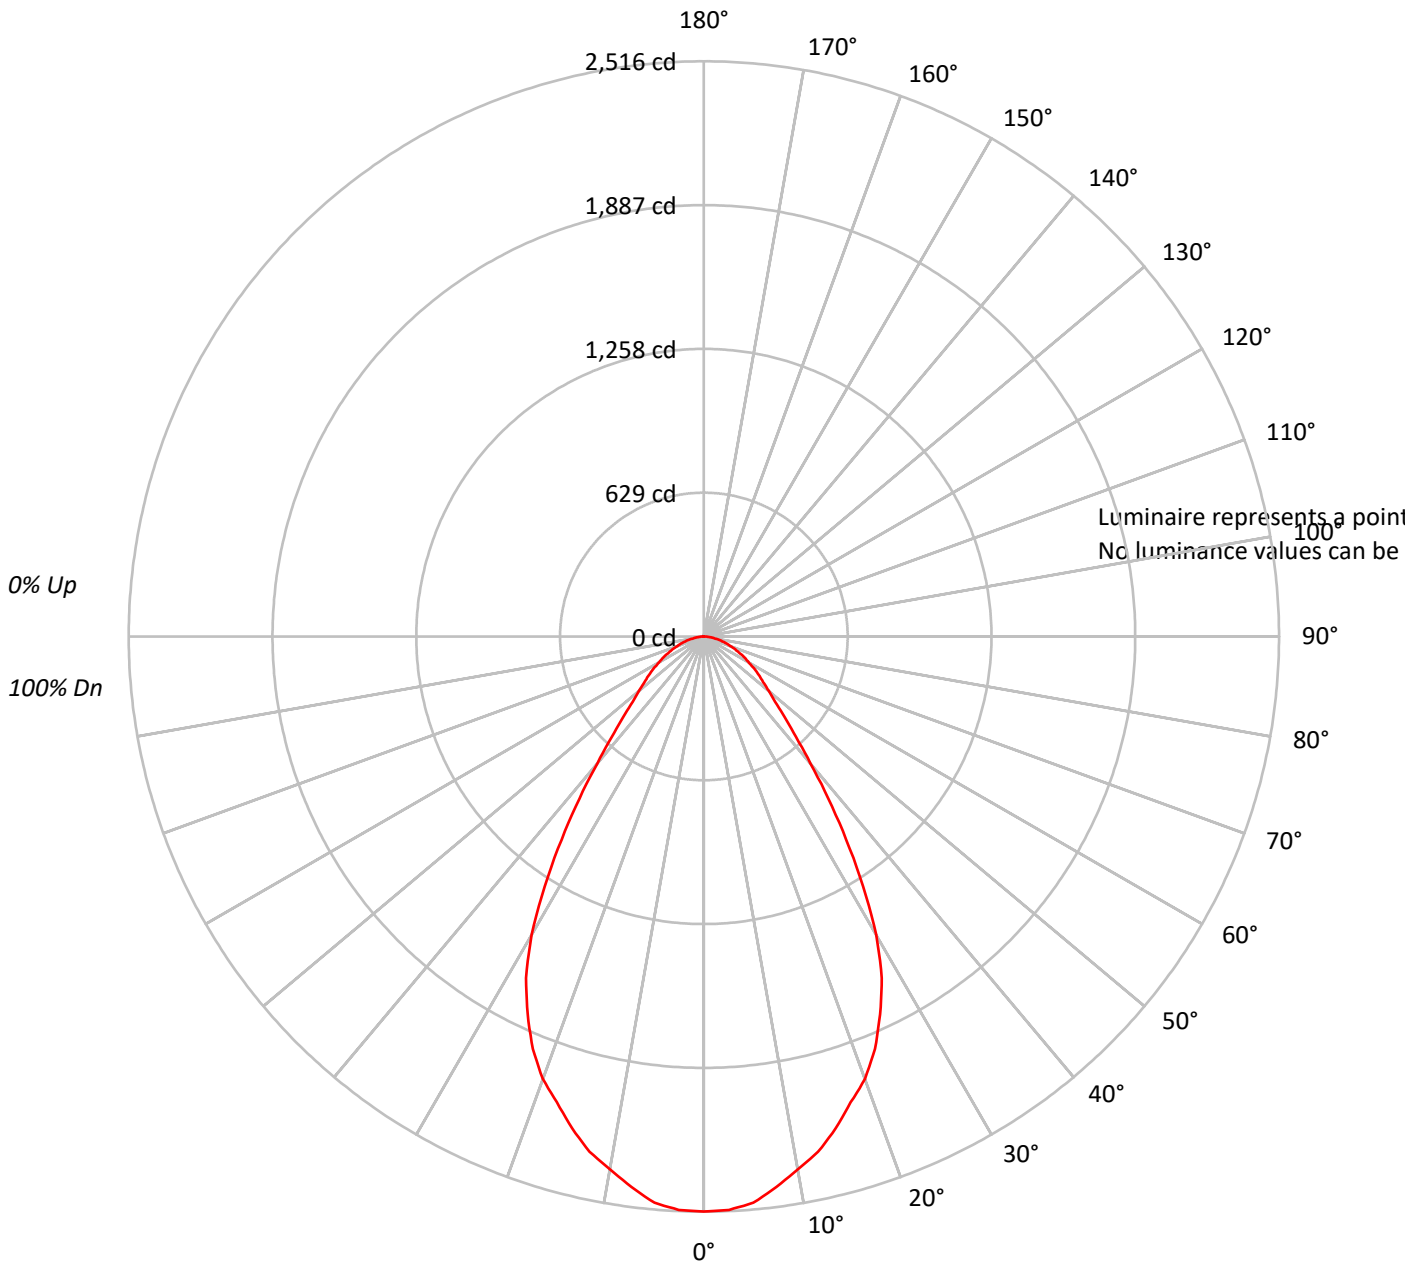



TEST NUMBER: P207592

CATALOG NUMBER: LD4B40D010 EU4B30508040 4LBMMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89			
2	104	98	92	88	102	96	91	87	93	89	85	89	86	83	87	84	81	80			
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71			
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	69	66	64			
5	85	75	67	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58			
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53			
7	75	64	57	52	74	63	56	51	62	56	51	60	55	51	59	54	50	49			
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45			
9	67	55	48	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42			
10	63	52	45	41	62	51	45	41	51	45	40	50	44	40	49	44	40	39			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207592

CATALOG NUMBER: LD4B40D010 EU4B30508040 4LBMMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	233.2	7.0
10°-20°	625.0	18.9
20°-30°	831.1	25.1
30°-40°	679.8	20.5
40°-50°	395.9	11.9
50°-60°	262.6	7.9
60°-70°	172.7	5.2
70°-80°	91.1	2.7
80°-90°	22.2	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1689.3	51.0
0°-40°	2369.1	71.5
0°-60°	3027.6	91.4
0°-90°	3313.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3313.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2516	
5°	2487	233
15°	2227	625
25°	1824	831
35°	1085	680
45°	499	396
55°	293	263
65°	173	173
75°	86	91
85°	19	22
90°	0	



TEST NUMBER: P207592

CATALOG NUMBER: LD4B40D010 EU4B30508040 4LBMMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2515.5
2.5°	2510.7
5°	2486.6
7.5°	2429.0
10°	2366.6
12.5°	2309.0
15°	2227.4
17.5°	2136.2
20°	2059.4
22.5°	1953.8
25°	1824.2
27.5°	1685.0
30°	1507.4
32.5°	1296.1
35°	1084.9
37.5°	892.9
40°	724.9
42.5°	595.3
45°	499.3
47.5°	422.4
50°	369.6
52.5°	326.4
55°	292.8
57.5°	259.2
60°	225.6
62.5°	201.6
65°	172.8
67.5°	148.8
70°	124.8
72.5°	105.6
75°	86.4
77.5°	67.2
80°	48.0
82.5°	33.6
85°	19.2
87.5°	4.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)