

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207696

Luminaire Tested: **LD4B40D010 EU4B30508050 4LBNH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207696
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B40D010 EU4B30508050 4LBNH1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-43.02W DE010-42.54W D5LT-42.539W DMX-41.87W DL2-41.57W
DL3-44.71W DLE-39.33W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2644.6 lumens
Efficiency: N/A
Efficacy: 63.3 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207696

CATALOG NUMBER: LD4B40D010 EU4B30508050 4LBNH1

Luminous Intensity Polar Plot

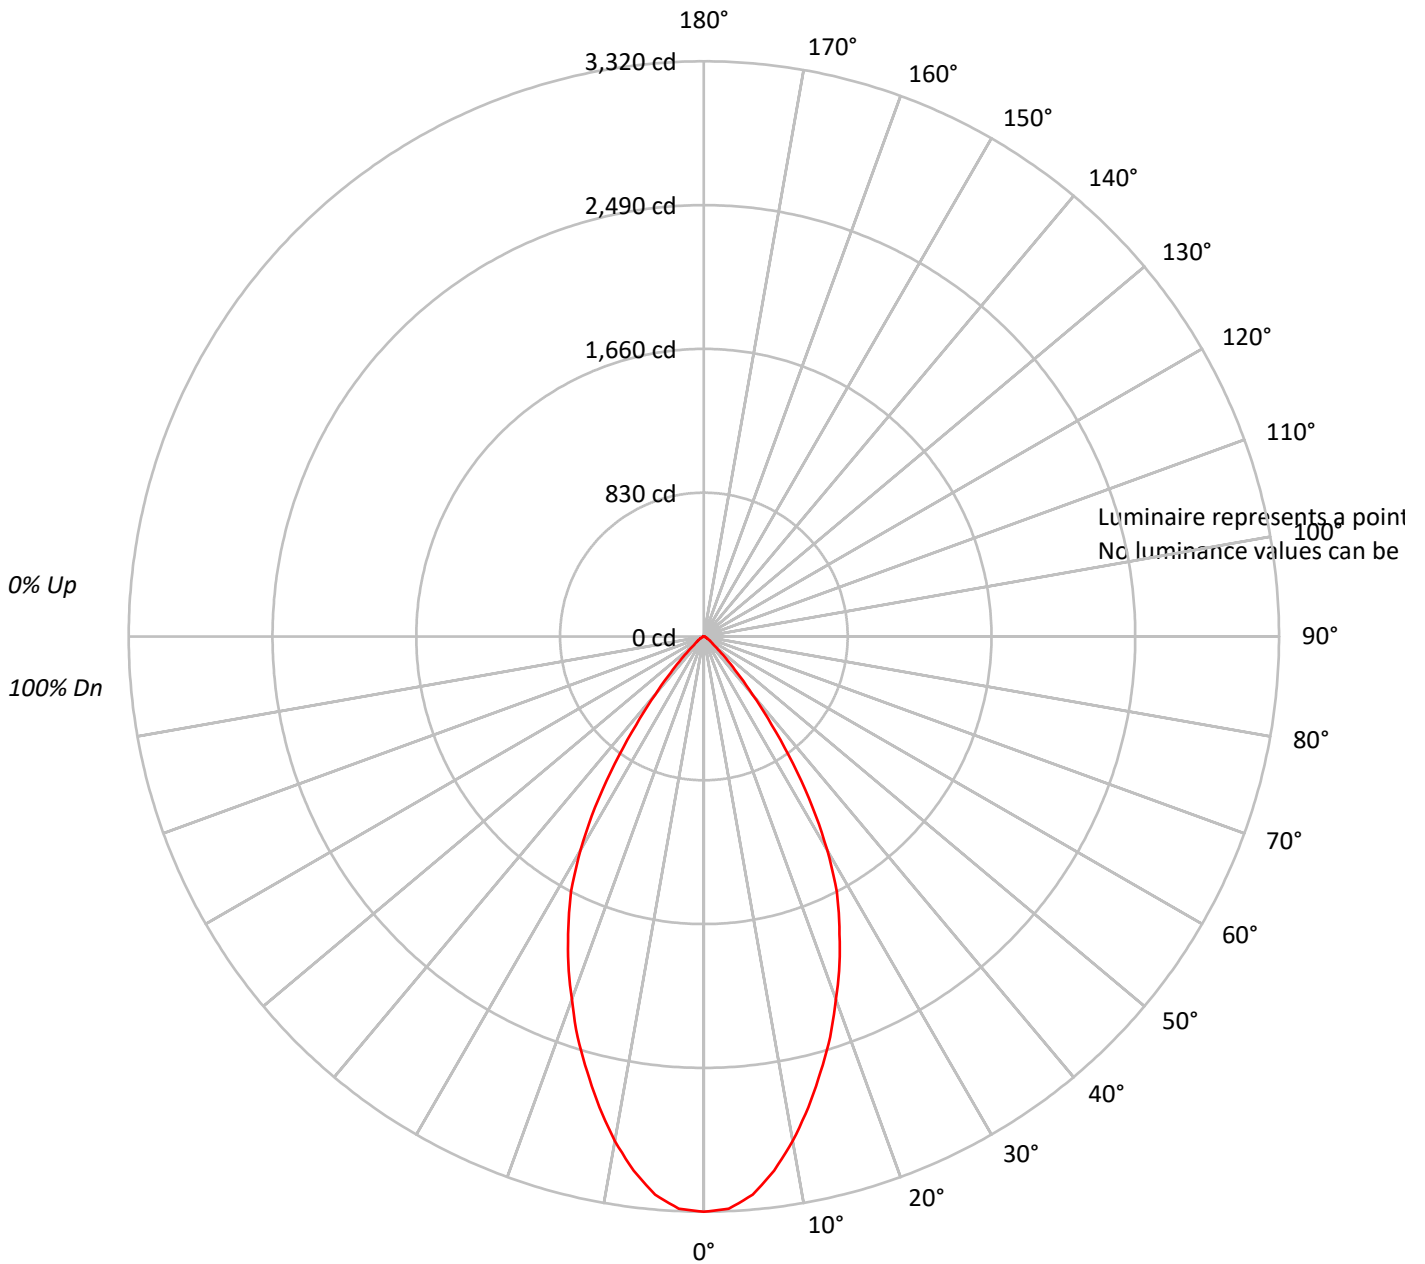



TEST NUMBER: P207696

CATALOG NUMBER: LD4B40D010 EU4B30508050 4LBNH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93																			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87																			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81																			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75																			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70																			
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65																			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61																			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58																			
9	76	66	60	56	74	65	60	56	65	59	56	64	59	56	63	59	55	54																			
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207696

CATALOG NUMBER: LD4B40D010 EU4B30508050 4LBNH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	299.6	11.3
10°-20°	726.7	27.5
20°-30°	843.7	31.9
30°-40°	558.7	21.1
40°-50°	156.7	5.9
50°-60°	39.4	1.5
60°-70°	14.8	0.6
70°-80°	5.1	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1870.0	70.7
0°-40°	2428.7	91.8
0°-60°	2624.8	99.2
0°-90°	2644.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2644.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3320	
5°	3234	300
15°	2602	727
25°	1850	844
35°	896	559
45°	182	157
55°	43	39
65°	14	15
75°	5	5
85°	0	0
90°	0	



TEST NUMBER: P207696

CATALOG NUMBER: LD4B40D010 EU4B30508050 4LBNH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3320.4
2.5°	3306.0
5°	3234.2
7.5°	3109.6
10°	2956.3
12.5°	2783.8
15°	2601.7
17.5°	2424.4
20°	2228.0
22.5°	2045.9
25°	1849.5
27.5°	1662.6
30°	1423.0
32.5°	1169.1
35°	896.0
37.5°	642.0
40°	436.0
42.5°	282.7
45°	182.1
47.5°	110.2
50°	71.9
52.5°	52.7
55°	43.1
57.5°	33.5
60°	24.0
62.5°	19.2
65°	14.4
67.5°	9.6
70°	9.6
72.5°	4.8
75°	4.8
77.5°	4.8
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)