

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P208523

Luminaire Tested: **LD4B50D010TE EU4B30508027 4LBNWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P208523
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B50D010TE EU4B30508027 4LBNWH1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH WHEAT TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3266.2 lumens
Efficiency: N/A
Efficacy: 55.6 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.62
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P208523

CATALOG NUMBER: LD4B50D010TE EU4B30508027 4LBNWH1

Luminous Intensity Polar Plot

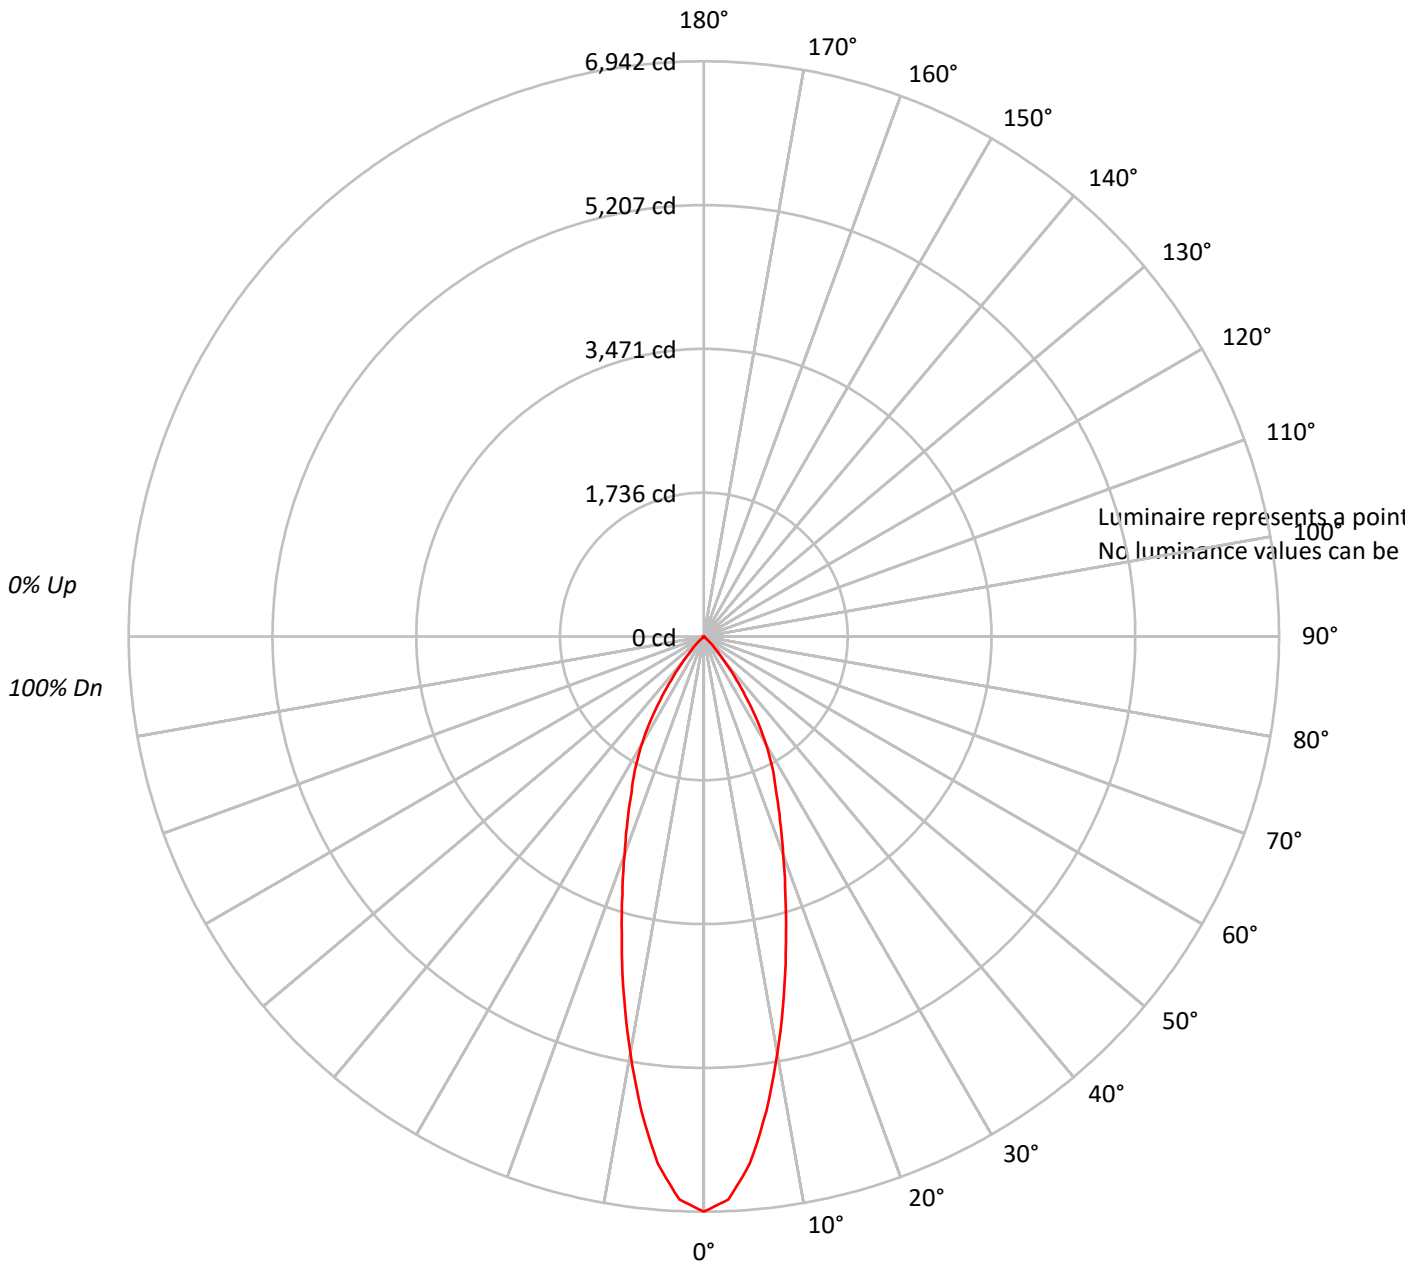



TEST NUMBER: P208523

CATALOG NUMBER: LD4B50D010TE EU4B30508027 4LBNWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	95		
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89		
3	104	98	94	90	102	97	93	90	94	91	88	92	89	87	90	87	85	84		
4	100	93	88	84	98	92	87	83	90	86	82	88	84	82	86	83	81	79		
5	95	88	82	78	94	87	82	78	85	81	77	83	80	77	82	79	76	75		
6	91	83	78	74	90	82	77	74	81	76	73	79	76	73	78	75	72	71		
7	87	79	73	70	86	78	73	69	77	72	69	76	72	69	75	71	68	67		
8	84	75	70	66	82	74	69	66	73	69	65	72	68	65	71	68	65	64		
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	65	62	61		
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	66	62	59	58		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P208523

CATALOG NUMBER: LD4B50D010TE EU4B30508027 4LBNWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	567.6	17.4
10°-20°	1064.8	32.6
20°-30°	955.4	29.3
30°-40°	548.2	16.8
40°-50°	109.4	3.3
50°-60°	13.8	0.4
60°-70°	6.2	0.2
70°-80°	0.7	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2587.8	79.2
0°-40°	3136.0	96.0
0°-60°	3259.2	99.8
0°-90°	3266.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3266.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6942	
5°	6383	568
15°	3823	1065
25°	2064	955
35°	868	548
45°	118	109
55°	17	14
65°	6	6
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P208523

CATALOG NUMBER: LD4B50D010TE EU4B30508027 4LBNWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	6941.5
2.5°	6800.5
5°	6383.2
7.5°	5774.2
10°	5108.8
12.5°	4454.7
15°	3823.2
17.5°	3270.6
20°	2796.9
22.5°	2402.2
25°	2063.8
27.5°	1793.2
30°	1494.3
32.5°	1189.8
35°	868.4
37.5°	592.1
40°	366.5
42.5°	219.9
45°	118.4
47.5°	50.7
50°	22.6
52.5°	16.9
55°	16.9
57.5°	11.3
60°	11.3
62.5°	5.6
65°	5.6
67.5°	5.6
70°	5.6
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)