

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P206579

Luminaire Tested: **LD4B50D010TE EU4B30509030 4LBCSMMS1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P206579
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B50D010TE EU4B30509030 4LBCSMMS1
Description: PORTFOLIO 4 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE BLACK TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3914.8 lumens
Efficiency: N/A
Efficacy: 66.6 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.27
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P206579

CATALOG NUMBER: LD4B50D010TE EU4B30509030 4LBCSMMS1

Luminous Intensity Polar Plot

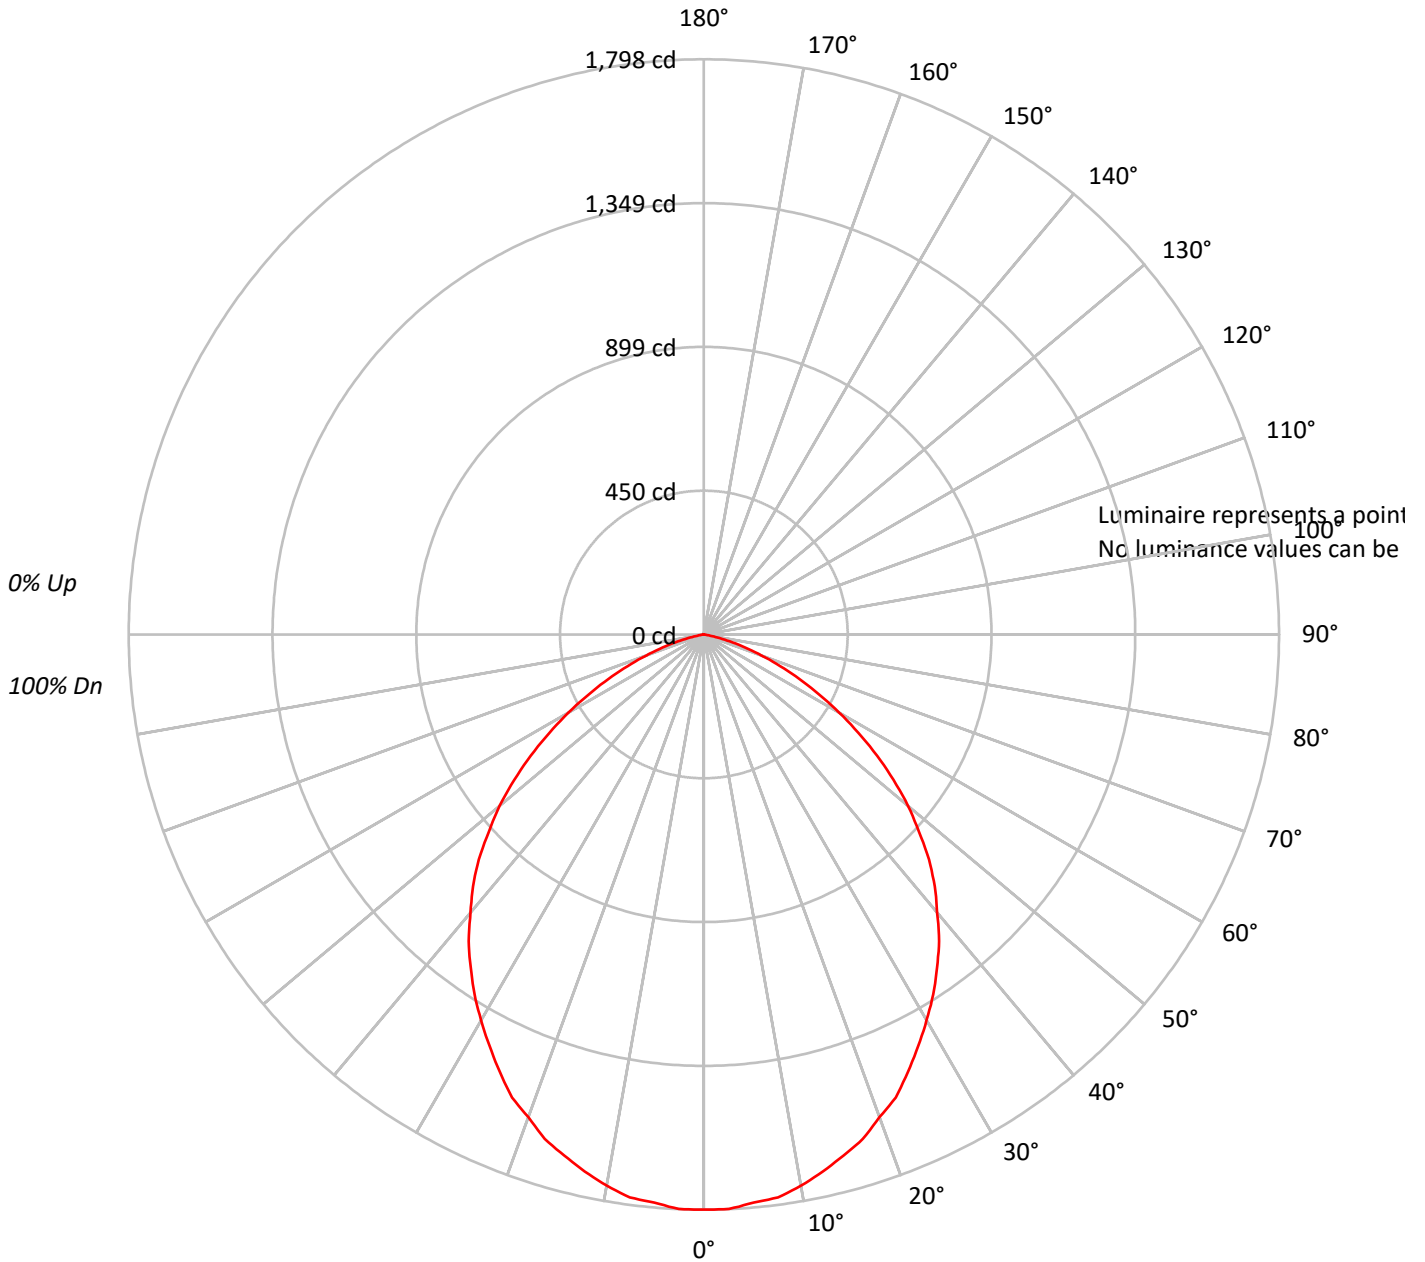



TEST NUMBER: P206579

CATALOG NUMBER: LD4B50D010TE EU4B30509030 4LBCSMMS1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	107	103	100	108	105	101	98	100	98	95	97	94	92	93	91	90	88			88
2	102	95	89	84	99	93	88	83	90	85	81	86	83	79	83	80	78	76			76
3	94	85	77	72	92	83	76	71	80	74	70	77	73	69	75	71	67	65			65
4	87	76	68	62	84	74	67	61	72	66	61	70	64	60	68	63	59	57			57
5	80	68	60	54	78	67	59	54	65	58	53	63	57	53	61	56	52	50			50
6	74	62	54	48	72	61	53	47	59	52	47	58	51	47	56	51	46	44			44
7	69	56	48	42	67	56	48	42	54	47	42	53	46	42	51	46	41	40			40
8	64	52	44	38	63	51	43	38	50	43	38	48	42	38	47	42	37	36			36
9	60	48	40	35	59	47	40	34	46	39	34	45	39	34	44	38	34	32			32
10	57	44	36	31	55	43	36	31	43	36	31	42	35	31	41	35	31	29			29

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P206579

CATALOG NUMBER: LD4B50D010TE EU4B30509030 4LBCSMMS1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	169.4	4.3
10°-20°	475.4	12.1
20°-30°	694.3	17.7
30°-40°	794.2	20.3
40°-50°	763.2	19.5
50°-60°	589.4	15.1
60°-70°	329.0	8.4
70°-80°	95.7	2.4
80°-90°	4.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1339.2	34.2
0°-40°	2133.3	54.5
0°-60°	3485.9	89.0
0°-90°	3914.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3914.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1798	
5°	1783	169
15°	1686	475
25°	1509	694
35°	1271	794
45°	995	763
55°	661	589
65°	329	329
75°	84	96
85°	2	4
90°	0	



TEST NUMBER: P206579

CATALOG NUMBER: LD4B50D010TE EU4B30509030 4LBCSMMS1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1797.8
2.5°	1797.8
5°	1782.6
7.5°	1775.0
10°	1749.7
12.5°	1719.3
15°	1686.4
17.5°	1653.4
20°	1605.3
22.5°	1567.3
25°	1509.1
27.5°	1450.9
30°	1392.6
32.5°	1334.4
35°	1271.1
37.5°	1207.8
40°	1134.4
42.5°	1068.5
45°	995.1
47.5°	911.5
50°	833.0
52.5°	747.0
55°	660.9
57.5°	572.2
60°	488.7
62.5°	405.1
65°	329.2
67.5°	258.3
70°	192.4
72.5°	134.2
75°	83.6
77.5°	43.0
80°	15.2
82.5°	5.1
85°	2.5
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)