

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P206378

Luminaire Tested: **LD4B50D010TE EU4B30509730 4LBCSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P206378
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B50D010TE EU4B30509730 4LBCSMW1
Description: PORTFOLIO 4 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4049.9 lumens
Efficiency: N/A
Efficacy: 68.9 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P206378

CATALOG NUMBER: LD4B50D010TE EU4B30509730 4LBCSMW1

Luminous Intensity Polar Plot

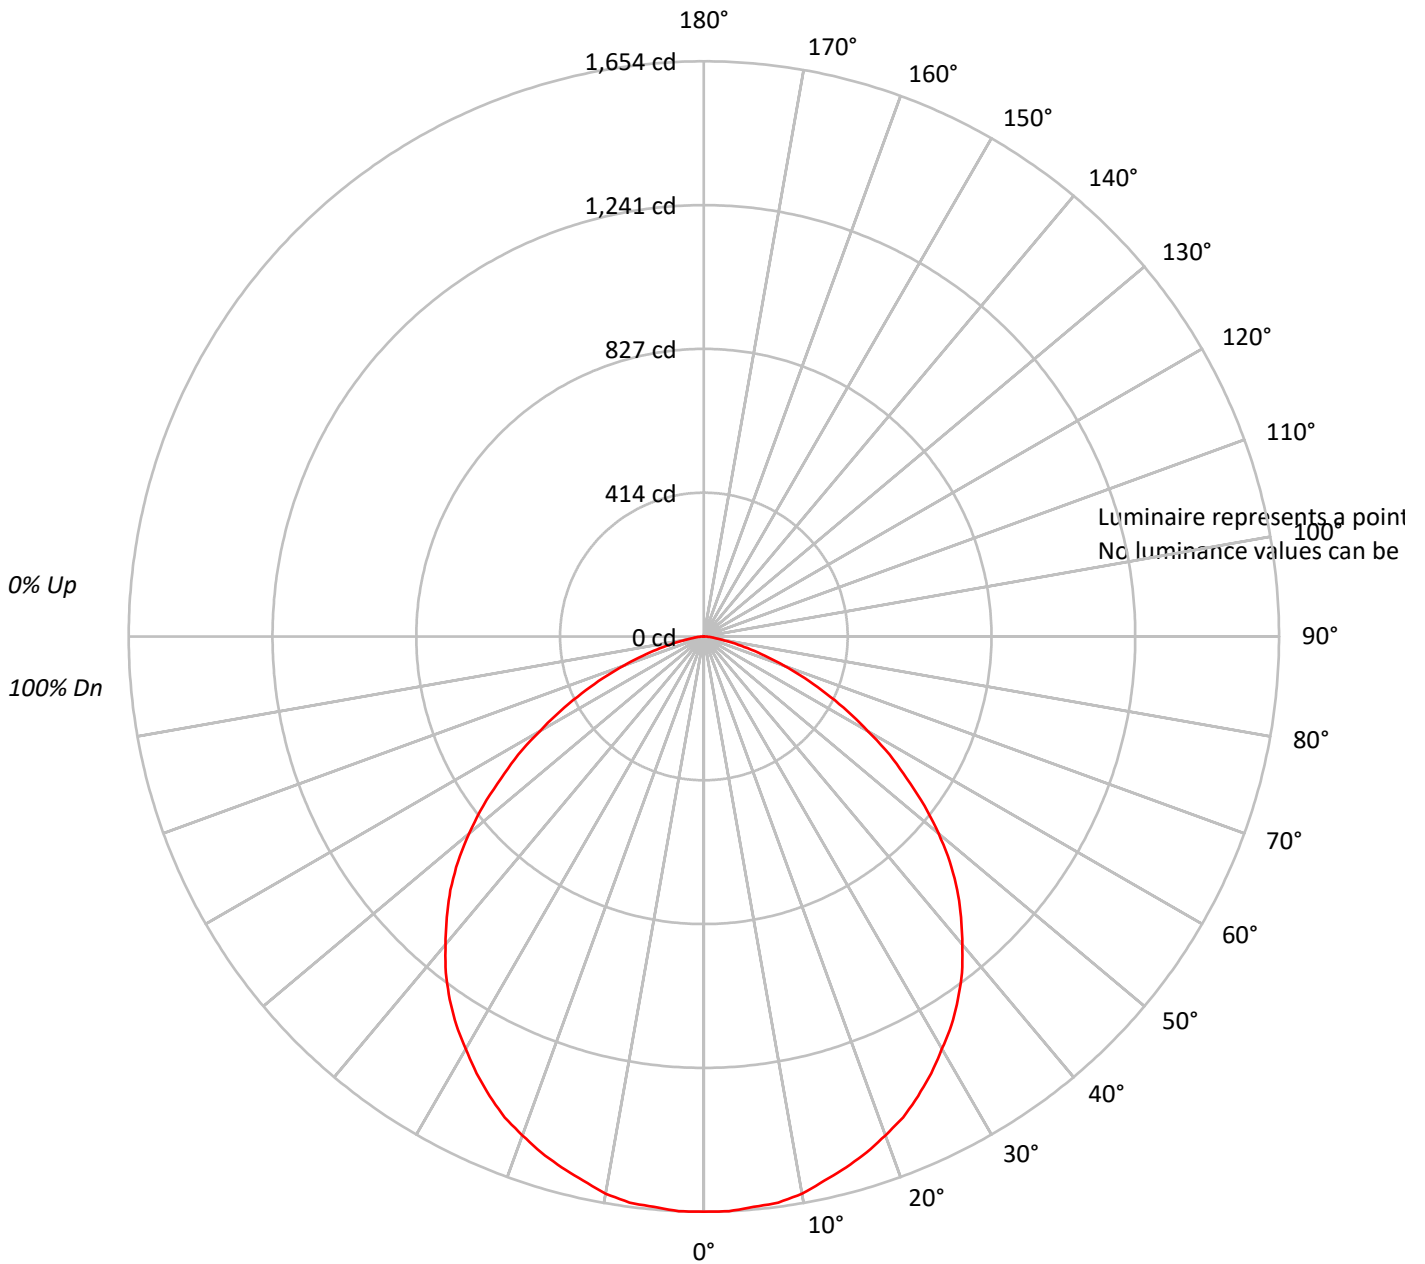



TEST NUMBER: P206378

CATALOG NUMBER: LD4B50D010TE EU4B30509730 4LBCSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87				87
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74				74
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63				63
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55				55
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48				48
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42				42
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37				37
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33				33
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30				30
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27				27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P206378

CATALOG NUMBER: LD4B50D010TE EU4B30509730 4LBCSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	156.7	3.9
10°-20°	446.2	11.0
20°-30°	671.2	16.6
30°-40°	795.4	19.6
40°-50°	791.6	19.5
50°-60°	638.1	15.8
60°-70°	386.0	9.5
70°-80°	143.3	3.5
80°-90°	21.4	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1274.1	31.5
0°-40°	2069.5	51.1
0°-60°	3499.2	86.4
0°-90°	4049.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4049.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1654	
5°	1647	157
15°	1580	446
25°	1458	671
35°	1274	795
45°	1031	792
55°	712	638
65°	388	386
75°	130	143
85°	17	21
90°	0	



TEST NUMBER: P206378

CATALOG NUMBER: LD4B50D010TE EU4B30509730 4LBCSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1654.1
2.5°	1654.1
5°	1646.7
7.5°	1641.8
10°	1627.1
12.5°	1602.6
15°	1580.5
17.5°	1555.9
20°	1526.5
22.5°	1497.0
25°	1457.8
27.5°	1416.0
30°	1369.4
32.5°	1325.2
35°	1273.7
37.5°	1219.7
40°	1155.9
42.5°	1094.6
45°	1030.7
47.5°	959.6
50°	881.0
52.5°	800.1
55°	711.7
57.5°	633.2
60°	544.8
62.5°	466.3
65°	387.8
67.5°	314.1
70°	245.4
72.5°	184.1
75°	130.1
77.5°	83.4
80°	49.1
82.5°	29.4
85°	17.2
87.5°	7.4
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)