

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P252118

Luminaire Tested: **LD4B50D010TE EU4B30508040 4LBBA1MB**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P252118  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-1712-453-4)  
Test Lab: INNOVATION CENTER(G1)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD4B50D010TE EU4B30508040 4LBBA1MB  
Description: PORTFOLIO 4 INCH BAFFLE RECESSED DOWNLIGHT, WITH MATTE BLACK TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2692.0 lumens  
Efficiency: N/A  
Efficacy: 45.8 lumens/watt  
Spacing Criteria (0/90/45): 1.04 / 1.04 / 0.94  
Luminous Opening: Circular (Dia: 0.38' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 58.77  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P252118

CATALOG NUMBER: LD4B50D010TE EU4B30508040 4LBBA1MB

### Luminous Intensity Polar Plot

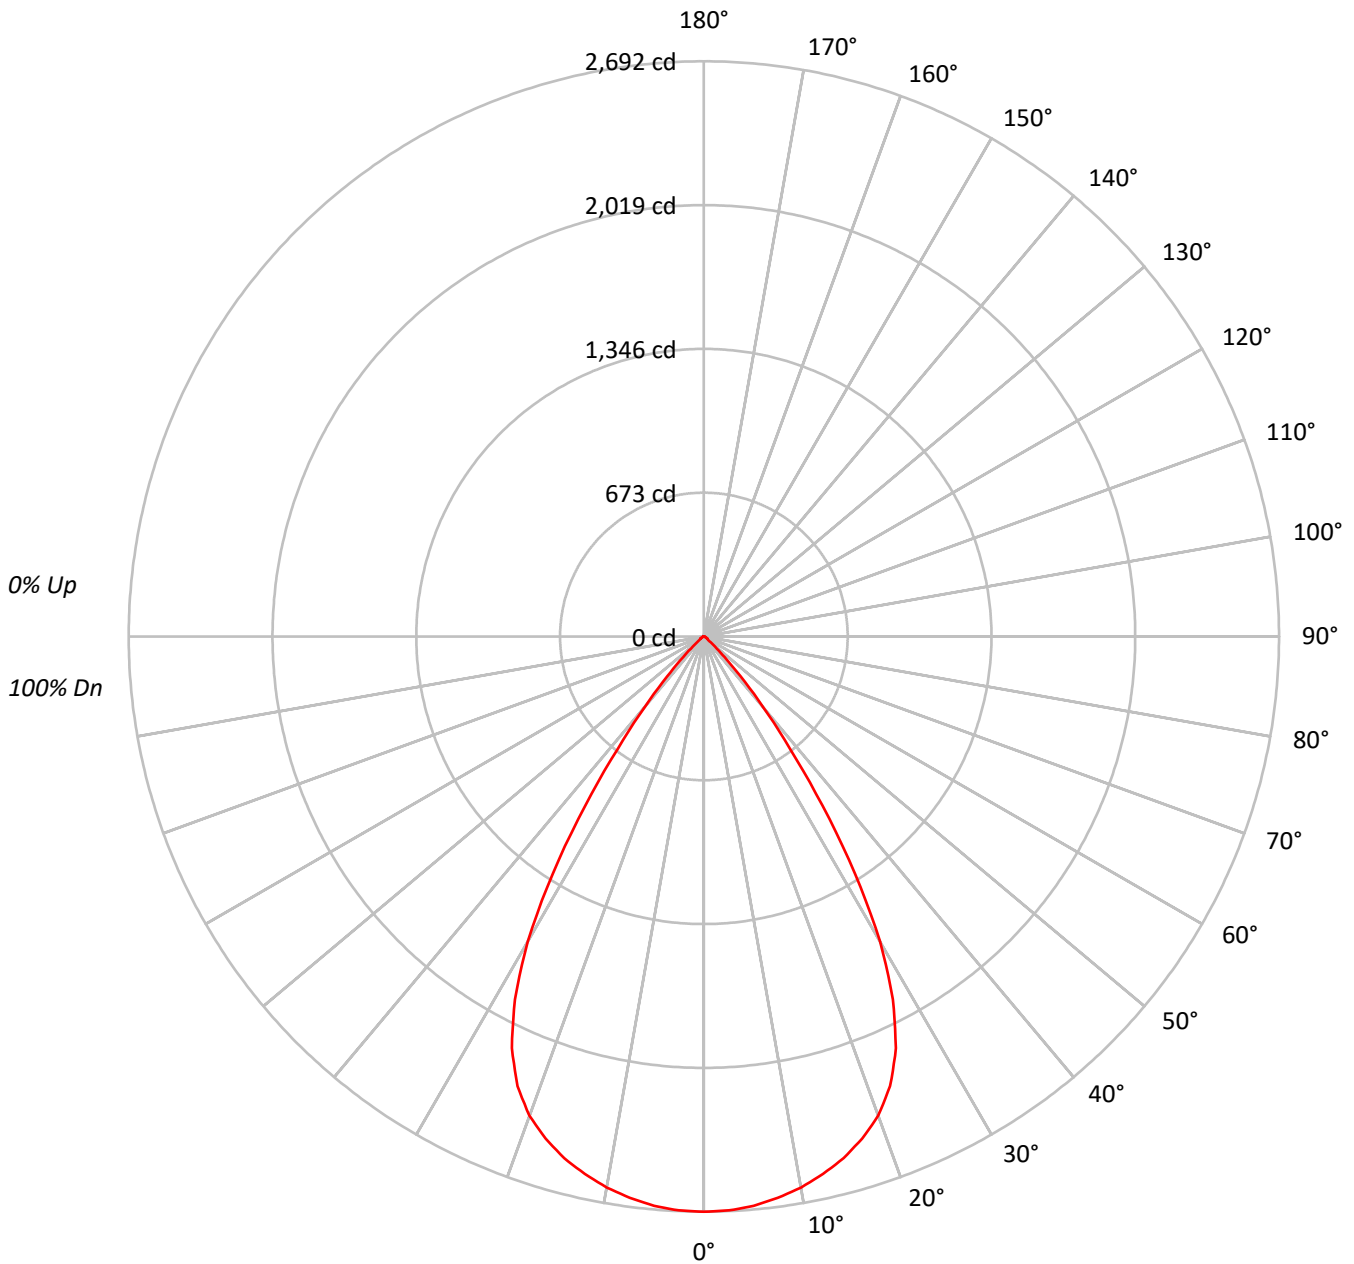



TEST NUMBER: P252118

CATALOG NUMBER: LD4B50D010TE EU4B30508040 4LBBA1MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	88	83	79	86	82	78	84	81	77	82	79	77	75			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70			
6	88	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65			
7	83	74	68	63	82	73	67	63	72	67	63	71	66	63	69	65	62	61			
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	61	58	57			
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53			
10	72	62	56	52	71	61	56	52	60	55	52	60	55	52	59	55	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	262386
5°	261667
10°	259131
15°	254974
20°	247510
25°	228658
30°	185503
35°	115001
40°	54108
45°	18896
50°	5322
55°	3585
60°	2748
65°	2421
70°	1995
75°	1318
80°	1964
85°	0



TEST NUMBER: P252118

CATALOG NUMBER: LD4B50D010TE EU4B30508040 4LBBA1MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	253.5	9.4
10°-20°	710.3	26.4
20°-30°	954.8	35.5
30°-40°	610.0	22.7
40°-50°	129.7	4.8
50°-60°	19.6	0.7
60°-70°	9.5	0.4
70°-80°	4.2	0.2
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1918.6	71.3
0°-40°	2528.6	93.9
0°-60°	2677.8	99.5
0°-90°	2692.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2692.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2692	
5°	2675	253
15°	2527	710
25°	2126	955
35°	967	610
45°	137	130
55°	21	20
65°	10	10
75°	4	4
85°	0	0
90°	0	



TEST NUMBER: P252118

CATALOG NUMBER: LD4B50D010TE EU4B30508040 4LBBA1MB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2692.3
2.5°	2688.8
5°	2674.7
7.5°	2650.1
10°	2618.5
12.5°	2576.3
15°	2527.1
17.5°	2463.8
20°	2386.5
22.5°	2277.5
25°	2126.4
27.5°	1915.5
30°	1648.4
32.5°	1318.0
35°	966.6
37.5°	660.8
40°	425.3
42.5°	253.1
45°	137.1
47.5°	70.3
50°	35.1
52.5°	24.6
55°	21.1
57.5°	17.6
60°	14.1
62.5°	10.5
65°	10.5
67.5°	7.0
70°	7.0
72.5°	3.5
75°	3.5
77.5°	3.5
80°	3.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)