

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P208320

Luminaire Tested: **LD4B50D010TE EU4B30508040 4LBNLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P208320
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B50D010TE EU4B30508040 4LBNI1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH SPECULAR CLEAR TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3964.4 lumens
Efficiency: N/A
Efficacy: 67.5 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P208320

CATALOG NUMBER: LD4B50D010TE EU4B30508040 4LBNLI1

Luminous Intensity Polar Plot

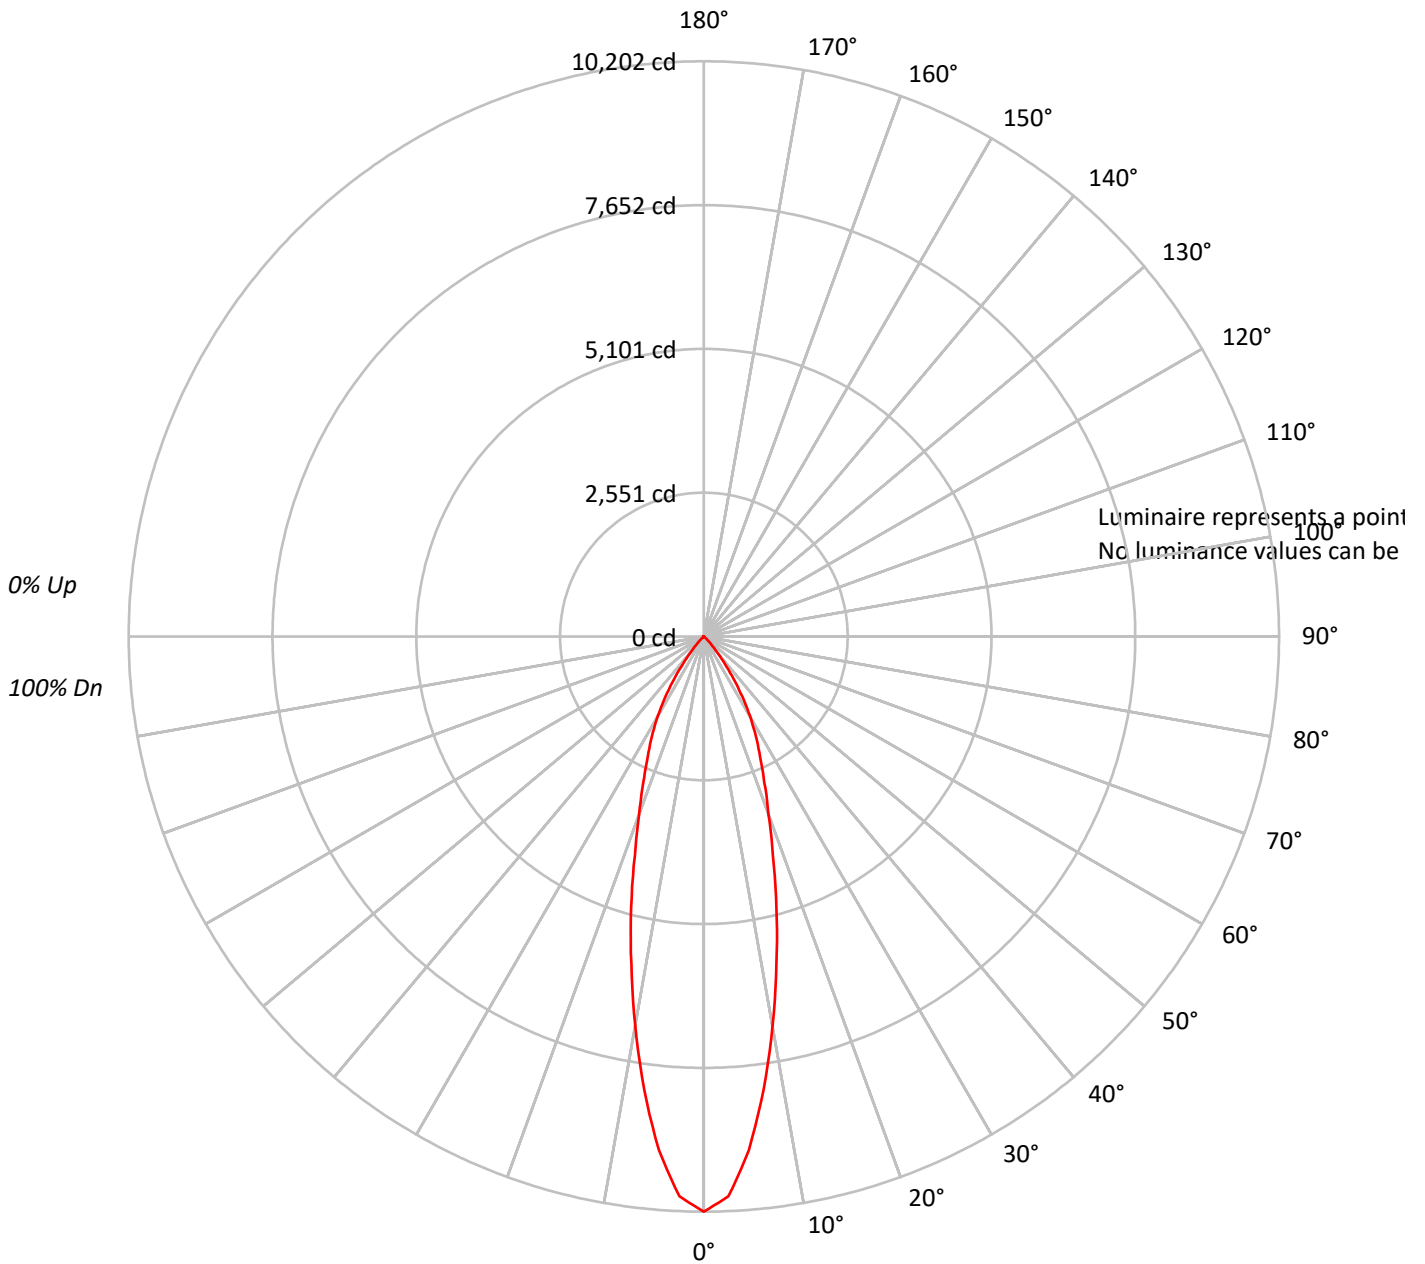



TEST NUMBER: P208320

CATALOG NUMBER: LD4B50D010TE EU4B30508040 4LBNLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95			95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90			90
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85			85
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81			81
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77			77
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73			73
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69			69
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66			66
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63			63
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61			61

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P208320

CATALOG NUMBER: LD4B50D010TE EU4B30508040 4LBNLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	804.0	20.3
10°-20°	1376.4	34.7
20°-30°	1093.9	27.6
30°-40°	579.1	14.6
40°-50°	99.8	2.5
50°-60°	7.5	0.2
60°-70°	3.7	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3274.4	82.6
0°-40°	3853.4	97.2
0°-60°	3960.7	99.9
0°-90°	3964.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3964.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10202	
5°	9146	804
15°	4976	1376
25°	2357	1094
35°	916	579
45°	104	100
55°	6	7
65°	6	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P208320

CATALOG NUMBER: LD4B50D010TE EU4B30508040 4LBNLI1

CANDELA DISTRIBUTION (FULL):

	0°
0°	10202.2
2.5°	9939.7
5°	9146.0
7.5°	8108.1
10°	7009.1
12.5°	5946.7
15°	4976.0
17.5°	4072.3
20°	3351.9
22.5°	2802.4
25°	2356.7
27.5°	1996.5
30°	1636.3
32.5°	1269.9
35°	915.8
37.5°	604.4
40°	360.2
42.5°	207.6
45°	103.8
47.5°	36.6
50°	12.2
52.5°	12.2
55°	6.1
57.5°	6.1
60°	6.1
62.5°	6.1
65°	6.1
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)