

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P208124

Luminaire Tested: **LD4B50D010TE EU4B30509040 4LBWLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P208124
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B50D010TE EU4B30509040 4LBWLI1
Description: PORTFOLIO 4 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4467.1 lumens
Efficiency: N/A
Efficacy: 76.0 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P208124

CATALOG NUMBER: LD4B50D010TE EU4B30509040 4LBWLI1

Luminous Intensity Polar Plot

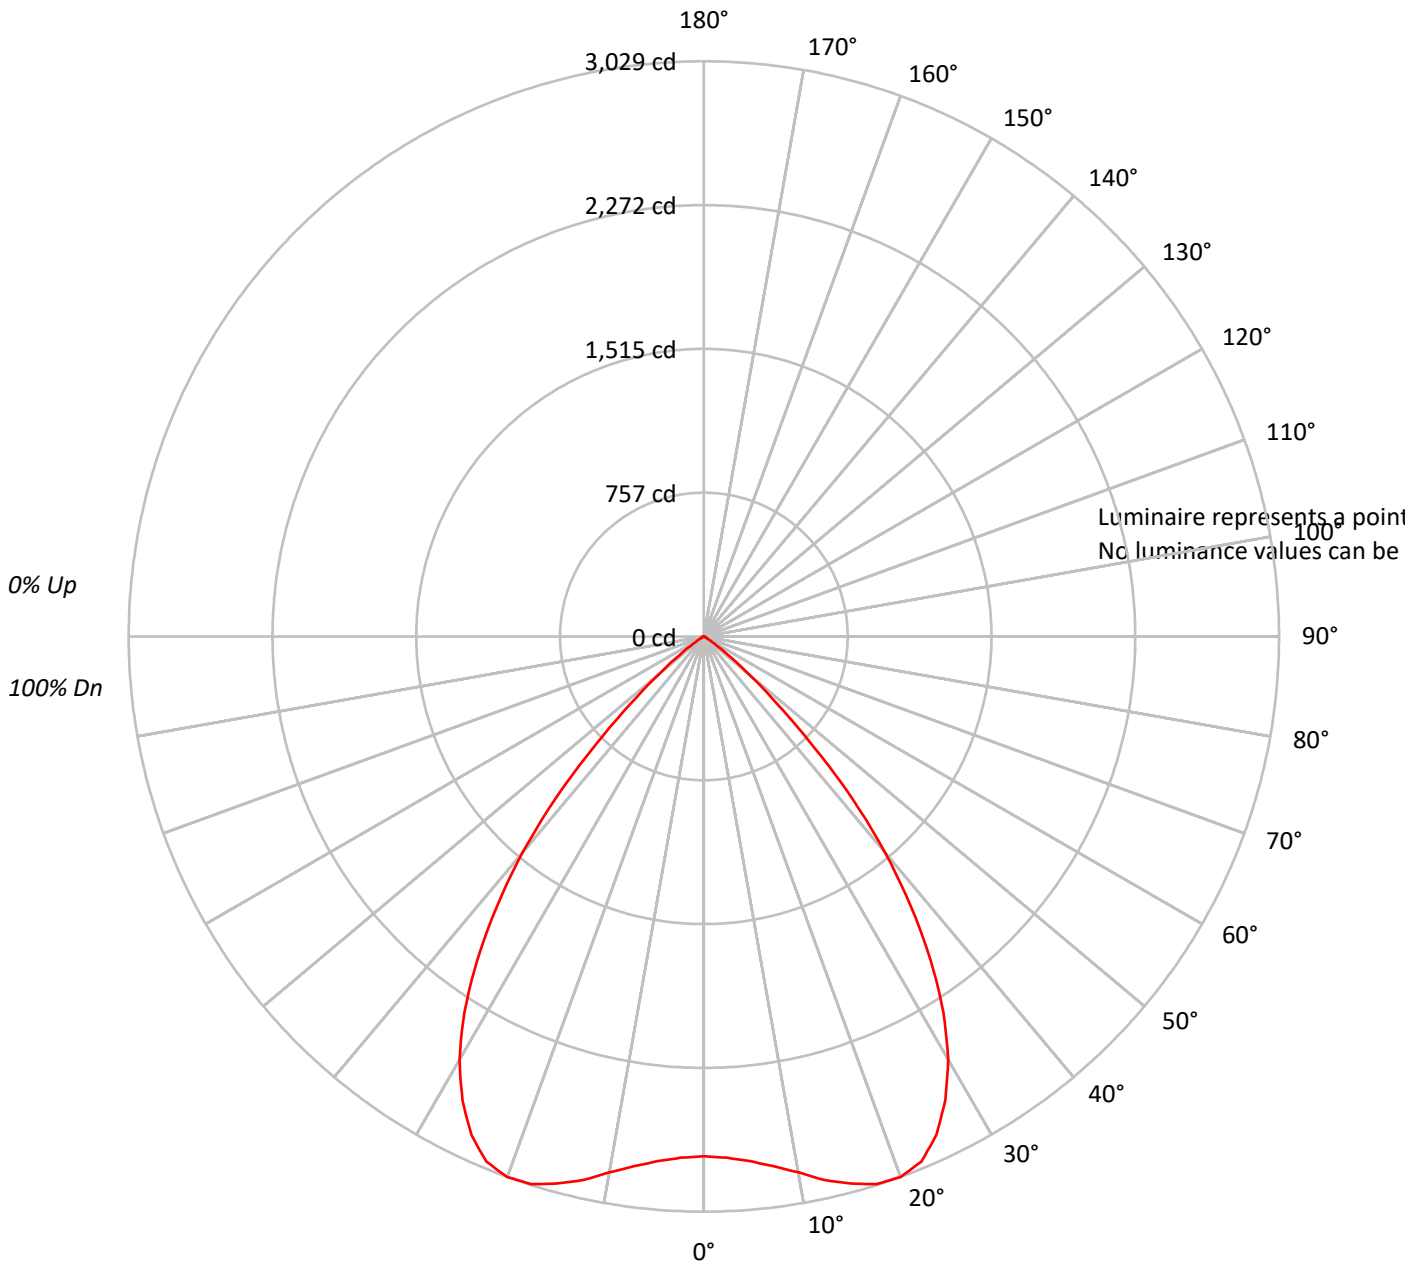



TEST NUMBER: P208124

CATALOG NUMBER: LD4B50D010TE EU4B30509040 4LBWLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92		
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84		
3	100	93	87	83	98	92	86	82	89	85	81	86	83	80	84	81	78	77		
4	94	86	79	75	92	84	79	74	82	77	73	80	76	72	78	75	72	70		
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64		
6	83	73	66	62	82	72	66	61	71	65	61	69	64	60	68	63	60	58		
7	78	68	61	56	77	67	61	56	66	60	56	64	59	55	63	59	55	54		
8	74	63	56	52	72	62	56	51	61	55	51	60	55	51	59	54	51	49		
9	69	59	52	48	68	58	52	47	57	51	47	56	51	47	55	50	47	45		
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P208124

CATALOG NUMBER: LD4B50D010TE EU4B30509040 4LBWLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	267.7	6.0
10°-20°	844.7	18.9
20°-30°	1317.8	29.5
30°-40°	1282.2	28.7
40°-50°	640.4	14.3
50°-60°	99.1	2.2
60°-70°	12.0	0.3
70°-80°	3.3	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2430.1	54.4
0°-40°	3712.3	83.1
0°-60°	4451.8	99.7
0°-90°	4467.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4467.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2737	
5°	2773	268
15°	2983	845
25°	2896	1318
35°	2082	1282
45°	803	640
55°	82	99
65°	10	12
75°	5	3
85°	0	0
90°	0	



TEST NUMBER: P208124

CATALOG NUMBER: LD4B50D010TE EU4B30509040 4LBWLI1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2737.1
2.5°	2747.4
5°	2772.9
7.5°	2813.9
10°	2865.0
12.5°	2931.5
15°	2982.7
17.5°	3023.6
20°	3028.8
22.5°	2992.9
25°	2895.7
27.5°	2752.5
30°	2573.4
32.5°	2348.3
35°	2082.3
37.5°	1790.6
40°	1483.7
42.5°	1156.2
45°	803.2
47.5°	516.7
50°	312.1
52.5°	168.8
55°	81.9
57.5°	35.8
60°	20.5
62.5°	15.3
65°	10.2
67.5°	10.2
70°	5.1
72.5°	5.1
75°	5.1
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)