

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839157

Luminaire Tested: **LD4C05D010 EU4059040 4LBSLI**

Issue Date: 2/9/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P839157  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208407)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/9/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C05D010 EU4059040 4LBSLI  
Description: 4 INCH 500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS AND 4LBS TRIM WITH LI FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 680.0 lumens  
Efficiency: N/A  
Efficacy: 94.4 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P839157

CATALOG NUMBER: LD4C05D010 EU4059040 4LBSLI

### Luminous Intensity Polar Plot

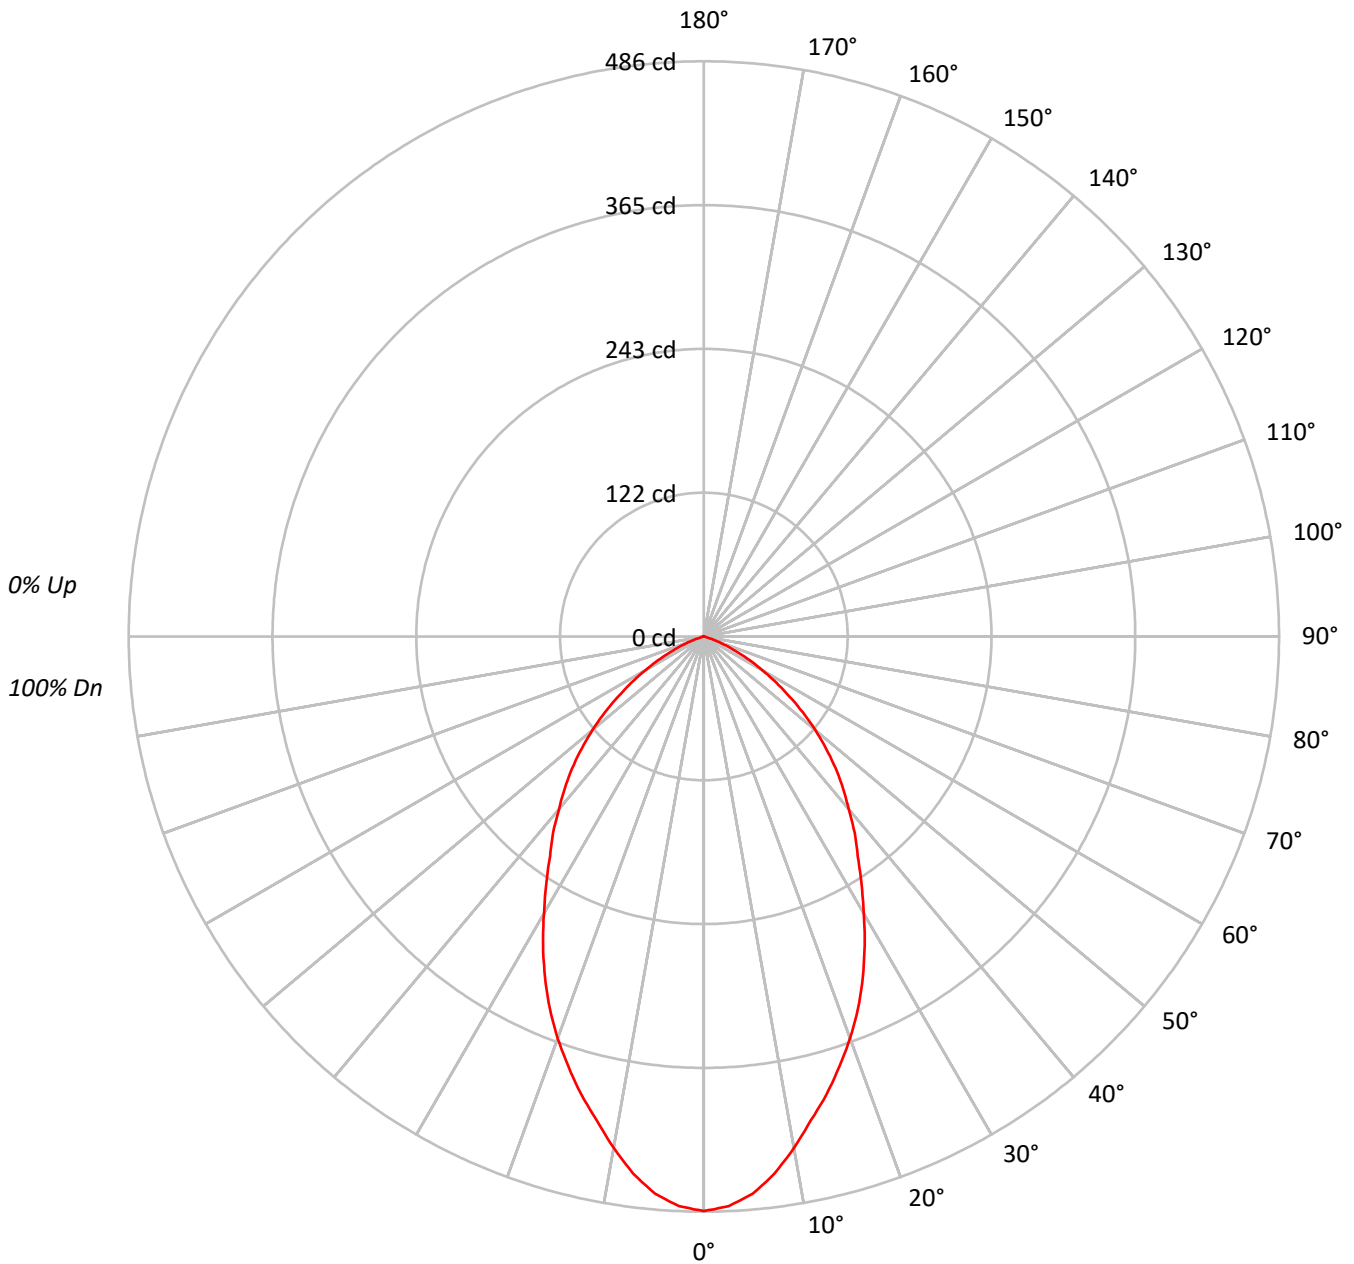



TEST NUMBER: P839157

CATALOG NUMBER: LD4C05D010 EU4059040 4LBSLI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90			
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80			
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71			
4	90	81	73	68	88	79	73	68	77	71	67	75	70	66	73	69	65	63			
5	84	73	66	61	82	72	65	60	70	64	60	69	63	59	67	62	59	57			
6	79	67	60	54	77	66	59	54	65	58	54	63	58	53	62	57	53	51			
7	74	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46			
8	69	57	50	45	68	57	50	45	55	49	45	54	49	44	53	48	44	42			
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	44	41	39			
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	59645
5°	58295
10°	54752
15°	50939
20°	47236
25°	43065
30°	38344
35°	33985
40°	30535
45°	27329
50°	23451
55°	18870
60°	14054
65°	8983
70°	4310
75°	712
80°	495
85°	0



TEST NUMBER: P839157

CATALOG NUMBER: LD4C05D010 EU4059040 4LBSLI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	44.0	6.5
10°-20°	112.3	16.5
20°-30°	145.5	21.4
30°-40°	142.6	21.0
40°-50°	120.8	17.8
50°-60°	79.2	11.7
60°-70°	31.8	4.7
70°-80°	3.6	0.5
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	301.8	44.4
0°-40°	444.4	65.4
0°-60°	644.4	94.8
0°-90°	680.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	680.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	486	
5°	473	44
15°	400	112
25°	318	146
35°	227	143
45°	157	121
55°	88	79
65°	31	32
75°	2	4
85°	0	0
90°	0	



TEST NUMBER: P839157

CATALOG NUMBER: LD4C05D010 EU4059040 4LBSLI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	485.5
2.5°	481.8
5°	472.7
7.5°	457.7
10°	438.9
12.5°	418.5
15°	400.5
17.5°	380.9
20°	361.3
22.5°	340.3
25°	317.7
27.5°	294.3
30°	270.3
32.5°	247.7
35°	226.6
37.5°	209.3
40°	190.4
42.5°	173.9
45°	157.3
47.5°	140.0
50°	122.7
52.5°	105.4
55°	88.1
57.5°	72.3
60°	57.2
62.5°	43.7
65°	30.9
67.5°	20.3
70°	12.0
72.5°	5.3
75°	1.5
77.5°	0.7
80°	0.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)