

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839162

Luminaire Tested: **LD4C08D010 EU4089027 4LBSH**

Issue Date: 2/14/2022



Test Information

Test Method: LM-79-08
Report Number: P839162
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205729)
Test Lab: INNOVATION CENTER
Issue Date: 2/14/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C08D010 EU4089027 4LBSH
Description: 4 INCH 800 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS AND 4LBS TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 831.0 lumens
Efficiency: N/A
Efficacy: 83.9 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.9
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P839162

CATALOG NUMBER: LD4C08D010 EU4089027 4LBSH

Luminous Intensity Polar Plot

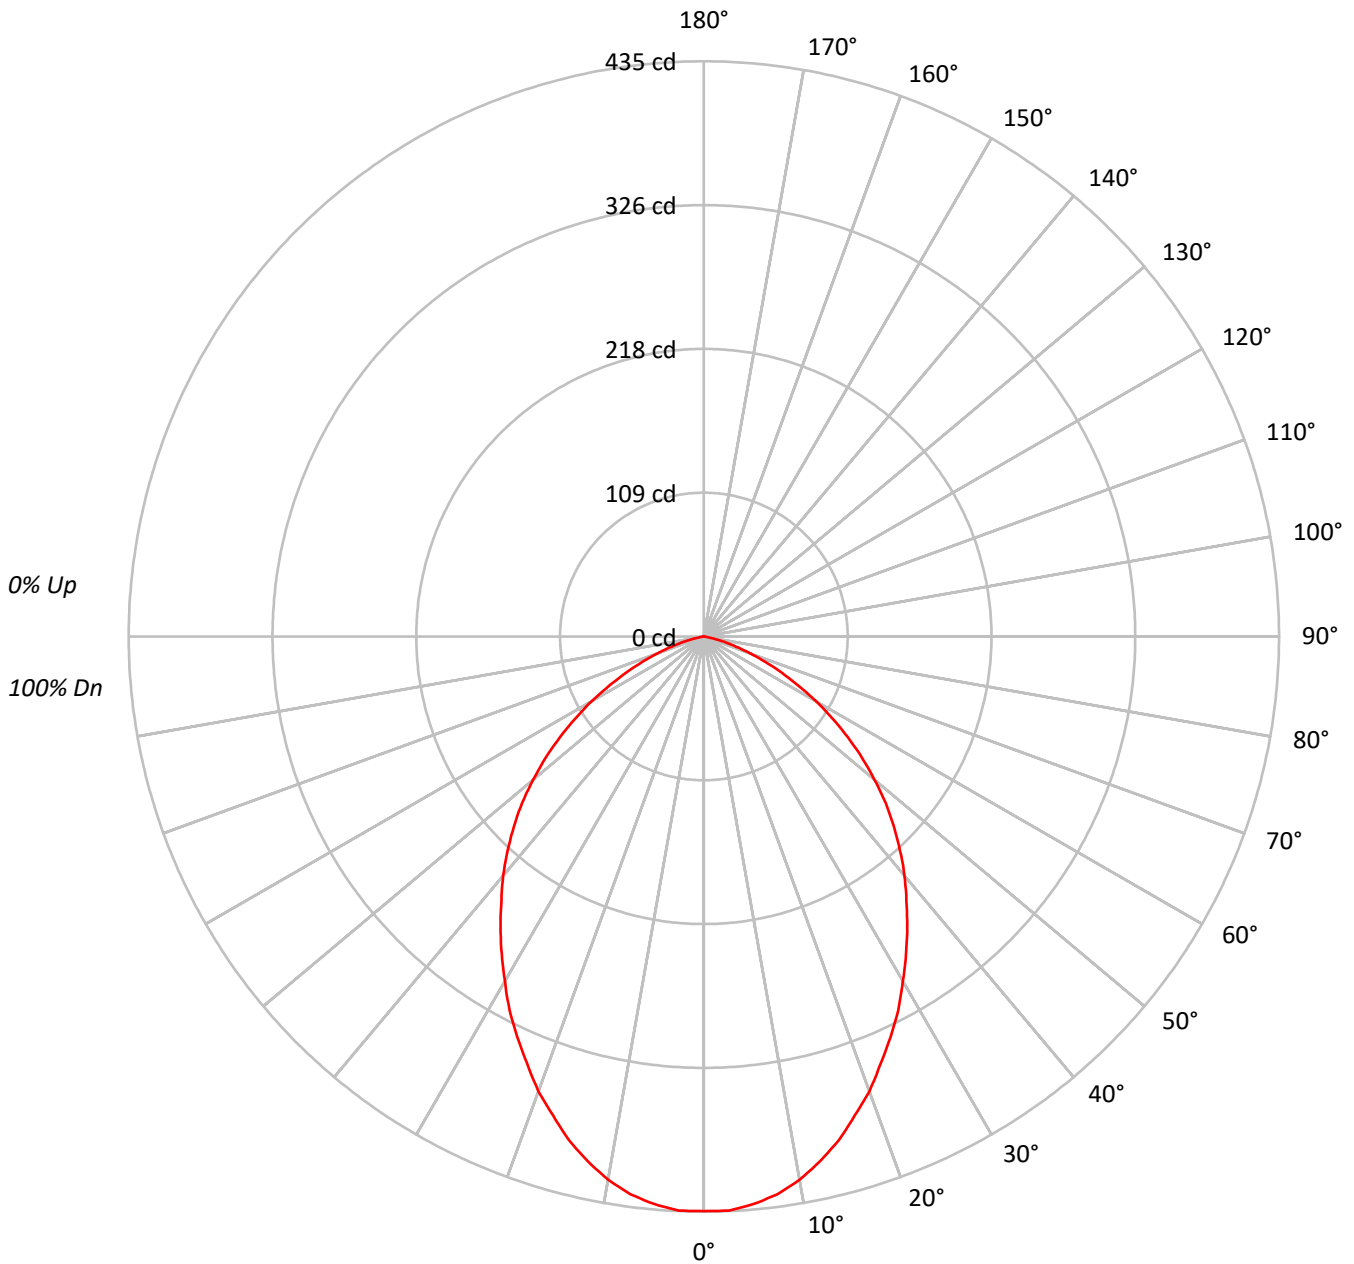



TEST NUMBER: P839162

CATALOG NUMBER: LD4C08D010 EU4089027 4LBSH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88																											
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77																											
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67																											
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58																											
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51																											
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46																											
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41																											
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37																											
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34																											
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31																											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	53392
5°	53140
10°	52045
15°	50163
20°	47850
25°	45275
30°	42700
35°	40209
40°	37864
45°	35287
50°	32186
55°	28423
60°	24055
65°	18895
70°	13470
75°	7405
80°	1273
85°	0



TEST NUMBER: P839162

CATALOG NUMBER: LD4C08D010 EU4089027 4LBSH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	40.7	4.9
10°-20°	110.7	13.3
20°-30°	153.7	18.5
30°-40°	167.7	20.2
40°-50°	156.4	18.8
50°-60°	118.7	14.3
60°-70°	65.0	7.8
70°-80°	17.9	2.2
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	305.0	36.7
0°-40°	472.7	56.9
0°-60°	747.9	90.0
0°-90°	831.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	831.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	435	
5°	431	41
15°	394	111
25°	334	154
35°	268	168
45°	203	156
55°	133	119
65°	65	65
75°	16	18
85°	0	0
90°	0	



TEST NUMBER: P839162

CATALOG NUMBER: LD4C08D010 EU4089027 4LBSH

CANDELA DISTRIBUTION (FULL):

	0°
0°	434.6
2.5°	434.6
5°	430.9
7.5°	425.5
10°	417.2
12.5°	406.3
15°	394.4
17.5°	379.7
20°	366.0
22.5°	349.5
25°	334.0
27.5°	318.4
30°	301.0
32.5°	284.6
35°	268.1
37.5°	251.6
40°	236.1
42.5°	219.6
45°	203.1
47.5°	186.6
50°	168.4
52.5°	151.0
55°	132.7
57.5°	115.3
60°	97.9
62.5°	80.5
65°	65.0
67.5°	50.3
70°	37.5
72.5°	25.6
75°	15.6
77.5°	7.3
80°	1.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)